LED Linear™ GmbH • Dr.-Alfred-Herrhausen-Allee 20, 47228 Duisburg, Germany
www.led-linear.com • info@led-linear.com • +49 2065 94322-100

View this configuration in the online product finder

LED LINEAR™
A Fagerhult Group Company

ADONIS IP67

ADONIS SW ___ _ _ _ _ ___ _ IP67

Project name

Company

Phase / Luminaire type for tech. spec. document

Date

Luminaire configuration: S - Stand-alone luminaire	Luminaire configuration: B - beginning of row	Luminaire configuration: M - cont. row middle	Luminaire configuration: E - end of row	Color of integrated glare control: BL - Encapsulated louver black	Light color / light source: Static White (SW)
Cable outlet position: BS - Back Side	Color rendering and efficiency: HE - CRI > 80, high efficacy	Color rendering and efficiency: HC - CRI > 90, standard efficacy	Color rendering and efficiency: HEC - CRI > 94, high efficacy	LED pitch / density: High Density	Profile color: B - Black
Profile color: G - Grey (RAL9022)	Profile color: W - White (RAL9003)	Power supply position: E - External PSU	Cable / connector configuration: MO - Male connector one side	Cable / connector configuration: DC - Daisy chain	Cable / connector configuration: OO - Open cable one side only
Cable / connector configuration: OT - Open cable both sides	Protection class: IP67	Input voltage [V]: 24V DC			

CERTIFICATES

Conformité Européenne (CE) · Ecodesign Directive · Environmental Product Declaration (EPD) · ETL certified · IECEE CB Scheme · Protection Class III · WEEE

- IPx9 testing according to ISO 60598-1:2020 by Intertek
- Protection test up to IK10 according to DIN EN 50102:1995 by Intertek
- Static load testing up to 10 kN according to EN 60598-2-13:2006 by Intertek

ELECTRICAL & OUTPUT DATA [1]

Power [W/m]	5	10	15	20	28	36
Efficiency [lm/W]	96.2	115.4	117.3	120.4	123.9	126.9
Max. daisy chain length [m]	11.25	7.75	6.25	5	4	3
CRI / R9	85/19	85/19	85/19	85/19	85/19	85/19
Rf / Rg	81/95	81/95	81/95	81/95	81/95	81/95
Ambient temperature [°C] max	50	50	50	45	35	35
Housing Temperature [°C] max	70	70	70	75	85	85

Power [W/m]	5	10	15	20	28	36
			Luminous flux [lm/m]			
W818	350	840	1240	1680	2380	3220
W822	420	960	1390	1960	2600	3730
W825	460	1060	1560	2130	3060	4060
W827	470	1120	1610	2260	3180	4290
W830	490	1180	1700	2300	3310	4450
W835	500	1180	1720	2320	3360	4560
W840	500	1200	1760	2400	3430	4580
W850	470	1140	1680	2280	3260	4360

(1): Light engine family: HYDRA HE SW HE ; Light distribution: 10X - 10° - linear optics ; Light color / light source: Static White (SW) ; Profile color: B - Black ; Color of integrated glare control: X - No integrated anti-glare ; Optional glare control accessory: No Accessories

PRODUCT INFORMATION

Product family	ADONIS IP67	**Protection class**	IP67
Luminaire type (rigid / flexible)	Rigid luminaire	**Luminaire profile size**	Standard
Light color / light source	Static White (SW)	**LED pitch / density**	High Density
ANSI LED binning	3 SDCM	**Cable outlet position**	BS - Back Side
Optional glare control accessory	No Accessories	**Power supply position**	E - External PSU
Control technology	XX - No PSU with No Control Controller	**Input voltage [V]**	24V DC
Storage temperature [°C]	TS(min): -30°, TS(max): 85°	**fixed luminaire section [mm]**	14.00
LED step length [mm]	62.50		

AVAILABLE OPTICS

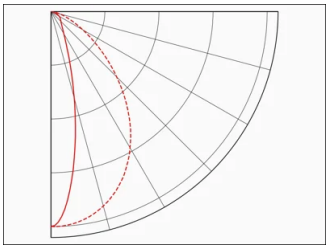

10X - 10° - linear optics

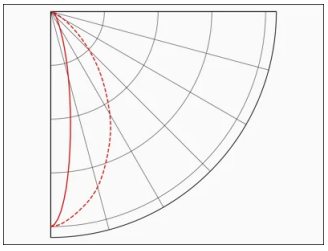

10A - 10° - linear optics with longitudinal louver

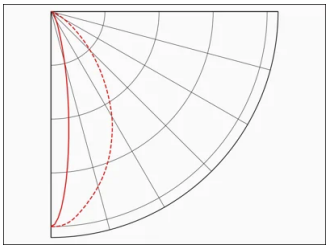

10B - 10° - linear optics with longitudinal and transversal louver

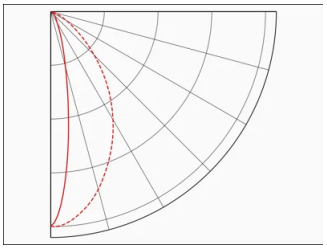

10C - 10° - linear optics with honeycomb louver

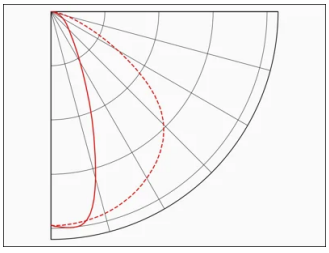

30X - 30° - linear optics

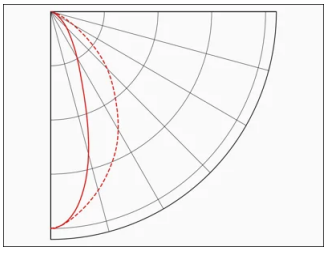

30A - 30° - linear optics with longitudinal louver

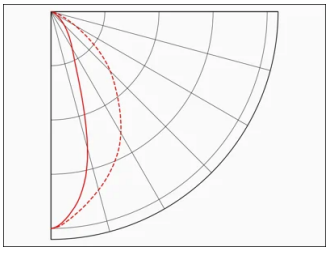

30B - 30° - linear optics with longitudinal and transversal louver

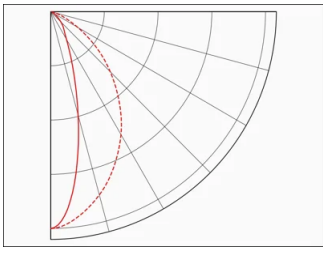

30C - 30° - linear optics with honeycomb louver

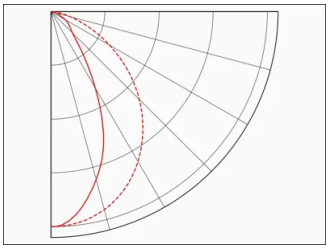

60X - 60° - linear optics

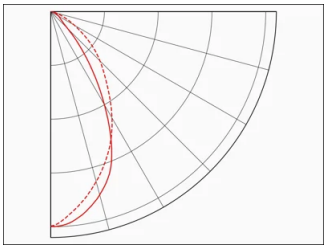

60A - 60° - linear optics with longitudinal louver

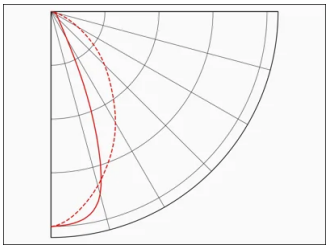

60B - 60° - linear optics with longitudinal and transversal louver

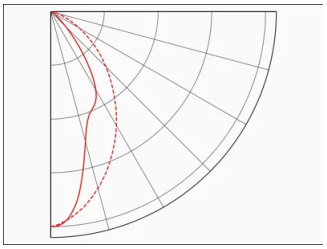

60C - 60° - linear optics with honeycomb louver

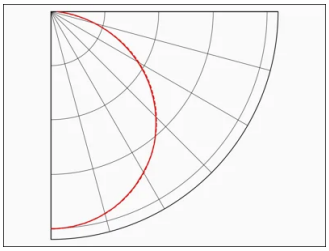

OLX - Opal low (sealed or cover)

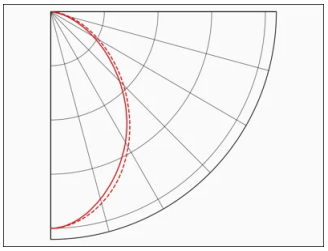

SDC - Soft diffuse with honeycomb louver

AVAILABLE PROFILE COLORS

B - Black

G - Grey (RAL9022)

W - White (RAL9003)

TECHNICAL SPECIFICATIONS

For general tolerances, including length tolerances, please refer to the technical drawing.

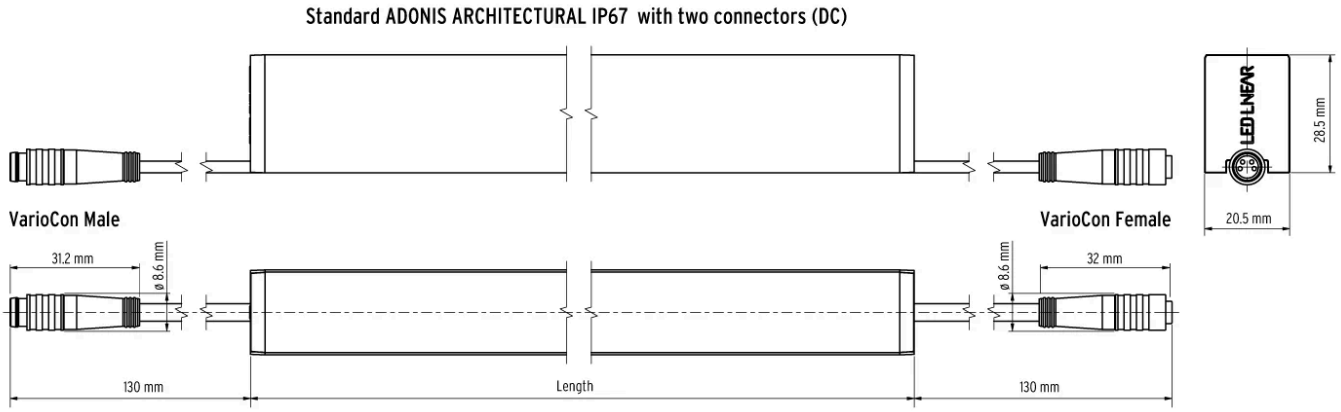

For cable / connector configuration options OT and OO the existing connector(s) are replaced with open-ended cable(s) of 2 m length.

1 ADONIS IP67 WITH HYDRA HE SW HE

HYDRA HE is a highly efficient 24 V LED light engine developed for sustainable lighting projects, delivering high efficacy at CRI > 80 while maintaining excellent color consistency through OneBinOnly binning and advanced Reel-to-Reel production. Its outstanding L80/B10 lifetime of over 102,000 hours and homogeneous dot-free illumination make it the ideal choice for energy-efficient linear lighting applications.

Electrical & Output Data

Power [W/m]	5	10	15	20	28	36
Efficiency [lm/W]	96.2	115.4	117.3	120.4	123.9	126.9
Max. daisy chain length [m]	11.25	7.75	6.25	5	4	3
CRI / R9	85/19	85/19	85/19	85/19	85/19	85/19
Rf / Rg	81/95	81/95	81/95	81/95	81/95	81/95
Ambient temperature [°C] max	50	50	50	45	35	35
Housing Temperature [°C] max	70	70	70	75	85	85

Power [W/m]	5	10	15	20	28	36
			Luminous flux [lm/m]			
W818	350	840	1240	1680	2380	3220
W822	420	960	1390	1960	2600	3730
W825	460	1060	1560	2130	3060	4060
W827	470	1120	1610	2260	3180	4290
W830	490	1180	1700	2300	3310	4450
W835	500	1180	1720	2320	3360	4560
W840	500	1200	1760	2400	3430	4580
W850	470	1140	1680	2280	3260	4360

Light engine family: HYDRA HE SW HE ; Light distribution: 10X - 10° - linear optics ; Light color / light source: Static White (SW) ; Profile color: B - Black ; Color of integrated glare control: X - No integrated anti-glare ; Optional glare control accessory: No Accessories

Order code structure

ADONIS SW _____ IP67

Light color / light source	Class	Power [W/m]	Color temperature (ANSI CCT)	Profile color	Light distribution	Cable / connector configuration	Luminaire configuration	Mounting type and accessory	Length [mm]	Protection class
Static White (SW)	High Efficency	5	1800K	B - Black	10X - 10° - linear optics	MO - Male connector one side	S - Stand-alone luminaire	IF - Inground frame	139	IP67
		10	2200K	G - Grey (RAL9022)	10A - 10° - linear optics with longitudinal louver	DC - Daisy chain	B - beginning of row	ML - Mounting lock - vandal-proof clip	202	
		15	2500K	W - White (RAL9003)	10B - 10° - linear optics with longitudinal and transversal louver	OO - Open cable one side only	M - cont. row middle	SH - Surface horizontal	264	
		20	2700K		10C - 10° - linear optics with honeycomb louver	OT - Open cable both sides	E - end of row	SV - Surface Vertical	...	
		28	3000K		30X - 30° - linear optics			A0 - Adjustable Arm L40	3,889	
		36	3500K		30A - 30° - linear optics with longitudinal louver			A1 - Adjustable Arm L100	3,952	
			4000K		30B - 30° - linear optics with longitudinal and transversal louver			A2 - Adjustable Arm L200	4,014	
			5000K		30C - 30° - linear optics with honeycomb louver			A3 - Adjustable Arm L300		
					60X - 60° - linear optics			SA - Surface adjustable		
					60A - 60° - linear optics with longitudinal louver			X - No supplied mounting accessory		
					60B - 60° - linear optics with longitudinal and transversal louver					
					60C - 60° - linear optics with honeycomb louver					
					OLX - Opal low (sealed or cover)					
					SDC - Soft diffuse with honeycomb louver					

NOTE: The order code table shows all available options for each product. However some combinations are not possible, due to product design. Please use our online configurator to specify your final product order code.

2 ADONIS IP67 WITH HYDRA EXL SW HEC

HYDRA EXL is a next-generation 24 V flexible LED light engine that combines groundbreaking Photon+ technology with premium Japanese 3030 LEDs to achieve up to high efficacy while delivering outstanding light quality with CRI >95 and high R9 as well. Designed and manufactured in Germany, it offers exceptional color consistency and an industry-leading L90/B10 lifetime of over 102,000 hours for maximum performance and sustainability.

Electrical & Output Data

Power [W/m]	4	6	11	15	20	32
Efficiency [lm/W]	95	97.5	115.3	117.3	118.5	114
Max. daisy chain length [m]	12.5	10	7.5	7.5	5	3.5
CRI / R9	94/76	94/76	94/76	94/76	94/76	94/76
Rf / Rg	87/100	87/100	87/100	87/100	87/100	87/100
Ambient temperature [°C] max	50	50	50	50	45	35
Housing Temperature [°C] max	70	70	70	70	75	85

Power [W/m]	4	6	11	15	20	32
			Luminous flux [lm/m]			
W927	330	460	1020	1470	1870	3080
W930	350	490	1100	1580	2130	3370
W935	370	510	1140	1640	2170	3470
W940	370	520	1160	1680	2210	3520
W950	380	540	1180	1710	2240	3560

Light engine family: HYDRA EXL SW HEC ; Light distribution: 10X - 10° - linear optics ; Light color / light source: Static White (SW) ; Profile color: B - Black ; Color of integrated glare control: X - No integrated anti-glare ; Optional glare control accessory: No Accessories

Order code structure

ADONIS SW _____ IP67

Light color / light source	Class	Power [W/m]	Color temperature (ANSI CCT)	Profile color	Light distribution	Cable / connector configuration	Luminaire configuration	Mounting type and accessory	Length [mm]	Protection class
Static White (SW)	High Efficency CRI	4	2700K	B - Black	10X - 10° - linear optics	MO - Male connector one side	S - Stand-alone luminaire	IF - Inground frame	139	IP67
		6	3000K	G - Grey (RAL9022)	10A - 10° - linear optics with longitudinal louver	DC - Daisy chain	B - beginning of row	ML - Mounting lock - vandal-proof clip	202	
		11	3500K	W - White (RAL9003)	10B - 10° - linear optics with longitudinal and transversal louver	OO - Open cable one side only	M - cont. row middle	SH - Surface horizontal	264	
		15	4000K		10C - 10° - linear optics with honeycomb louver	OT - Open cable both sides	E - end of row	SV - Surface Vertical	...	
		20	5000K		30X - 30° - linear optics			A0 - Adjustable Arm L40	3,889	
		32			30A - 30° - linear optics with longitudinal louver			A1 - Adjustable Arm L100	3,952	
					30B - 30° - linear optics with longitudinal and transversal louver			A2 - Adjustable Arm L200	4,014	
					30C - 30° - linear optics with honeycomb louver			A3 - Adjustable Arm L300		
					60X - 60° - linear optics			SA - Surface adjustable		
					60A - 60° - linear optics with longitudinal louver			X - No supplied mounting accessory		
					60B - 60° - linear optics with longitudinal and transversal louver					
					60C - 60° - linear optics with honeycomb louver					
					OLX - Opal low (sealed or cover)					
					SDC - Soft diffuse with honeycomb louver					

NOTE: The order code table shows all available options for each product. However some combinations are not possible, due to product design. Please use our online configurator to specify your final product order code.

3 ADONIS IP67 WITH HYDRA PRO SW HC

HYDRA PRO is a premium 24 V flexible LED light engine that combines exceptional light quality (High CRI and R9) with proven LED Linear technologies such as OneBinOnly, Tj Away® thermal management, and Reel-to-Reel production for outstanding consistency and reliability. Designed and manufactured in Germany, it delivers up to 122 lm/W and provides maximum design flexibility with close LED spacing and cut points every 62.5 mm.

Electrical & Output Data

Power [W/m]	4	7	13	18	24	35
Efficiency [lm/W]	76	78.8	96.3	92.2	95.7	93.4
Max. daisy chain length [m]	11.5	10	7	5.3	3.3	2.3
CRI / R9	93/84	93/84	93/84	93/84	93/84	93/84
Rf / Rg	85/96	85/96	85/96	85/96	85/96	85/96
Ambient temperature [°C] max	50	50	50	45	45	35
Housing Temperature [°C] max	70	70	70	70	75	85

Power [W/m]	4	7	13	18	24	35
			Luminous flux [lm/m]			
W922	250	390	890	1320	1660	2560
W927	260	460	1070	1540	1920	3020
W930	270	480	1100	1580	2040	3040
W935	280	500	1130	1640	2060	3080
W940	290	500	1140	1660	2160	3300
W950	300	510	1180	1670	2190	3340

Light engine family: HYDRA PRO SW HC ; Light distribution: 10X - 10° - linear optics ; Light color / light source: Static White (SW) ; Profile color: B - Black ; Color of integrated glare control: X - No integrated anti-glare ; Optional glare control accessory: No Accessories

Order code structure

ADONIS SW _____ IP67

Light color / light source	Class	Power [W/m]	Color temperature (ANSI CCT)	Profile color	Light distribution	Cable / connector configuration	Luminaire configuration	Mounting type and accessory	Length [mm]	Protection class
Static White (SW)	High CRI	4	2000K	B - Black	10X - 10° - linear optics	MO - Male connector one side	S - Stand-alone luminaire	IF - Inground frame	139	IP67
		7	2200K	G - Grey (RAL9022)	10A - 10° - linear optics with longitudinal louver	DC - Daisy chain	B - beginning of row	ML - Mounting lock - vandal-proof clip	202	
		13	2500K	W - White (RAL9003)	10B - 10° - linear optics with longitudinal and transversal louver	OO - Open cable one side only	M - cont. row middle	SH - Surface horizontal	264	
		18	2700K		10C - 10° - linear optics with honeycomb louver	OT - Open cable both sides	E - end of row	SV - Surface Vertical	...	
		24	3000K		30X - 30° - linear optics			A0 - Adjustable Arm L40	3,889	
		35	3500K		30A - 30° - linear optics with longitudinal louver			A1 - Adjustable Arm L100	3,952	
			4000K		30B - 30° - linear optics with longitudinal and transversal louver			A2 - Adjustable Arm L200	4,014	
			4500K		30C - 30° - linear optics with honeycomb louver			A3 - Adjustable Arm L300		
			5000K		60X - 60° - linear optics			SA - Surface adjustable		
					60A - 60° - linear optics with longitudinal louver			X - No supplied mounting accessory		
					60B - 60° - linear optics with longitudinal and transversal louver					
					60C - 60° - linear optics with honeycomb louver					
					OLX - Opal low (sealed or cover)					
					SDC - Soft diffuse with honeycomb louver					

NOTE: The order code table shows all available options for each product. However some combinations are not possible, due to product design. Please use our online configurator to specify your final product order code.

MOUNTING ACCESSORIES (SELECTABLE WITH ORDER CODE)

Please note: Mounting accessory are automatically included with the luminaire with the required amount of clips or the correct length of the mounting profile when chosen as part of the order code - see the digit in the order code below.

	Mounting accessories	Description
	**SURFACE MOUNTING FIXED HORIZONTAL** Digits in order code: SH	Stainless steel clip with washer. Clips inside the fixture profile for invisible mounting. DarkSky requires a downward-facing installation. Use according to the mounting instruction.
	**SURFACE MOUNTING FIXED VERTICAL** Digits in order code: SV	Stainless steel clip with washer. Clips inside the fixture profile for invisible mounting. Sliding block C010 incl. screw Metal mounting block with set screw for vertical applications. Install inside the fixture profile to stop the fixture from sliding. Use according to the mounting instruction.
	**ADJUSTABLE ARM** Digits in order code: A0 | A1 | A2 | A3	40 mm / 1.57 in (A0), 100 mm / 3.94 in (A1), 200 mm / 7.87 in (A2) or 300 mm / 11.81 in (A3) adjustable mounting arm. Supplied according to the selected profile color (RAL9003, RAL9005, RAL9022). The set includes premounted mounting clip incl. screws for fixing the luminaire. Allows tilting by 120° in any direction and features cable channel. Use according to the installation instructions.
 	**SURFACE MOUNTING ADJUSTABLE** Digits in order code: SA	Adjustable Mounting Clip C007/C010 L140 (silver or black anodized). 140 mm / 5.51 in long adjustable mounting clip tiltable 60° to each side. Silver clip comes together with profile colors white and gray. Black clip comes together with the black profile color. Use according to the mounting instruction.

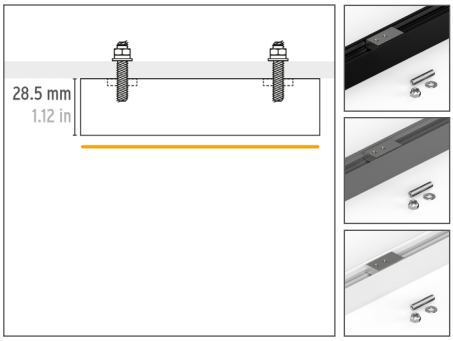

MOUNTING LOCK

Digits in order code: ML

Screw Kit M5 for Mounting Lock 25 mm
threaded pin with washer and nut.
For a vandal resistant installation.

DarkSky requires a downward-facing installation.

Use according to the mounting instruction.

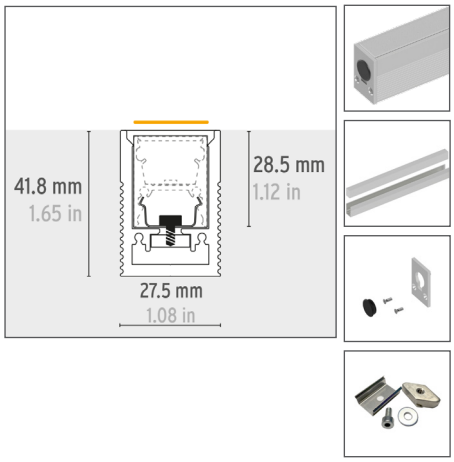

INGROUND MOUNTING FRAME

Digits in order code: IF

(L x H x W)
luminaire length x 41.8 mm x 27.5 mm

Aluminum frame (silver anodized) cut to luminaire length incl. styrofoam dummy and endcap + clip set for stand-alone luminaire applications.

Suitable for pedestrian and vehicular use up to 10 kN.
Drainage must be prepared on site.

Use according to the mounting instruction.

ADDITIONAL ACCESSORY (OPTIONAL - ORDERED SEPARATELY)

Please note: Mounting accessories are not automatically included with the luminaire. Please order the right amount of accessories with the article numbers listed below. For any questions, please contact our customer service.

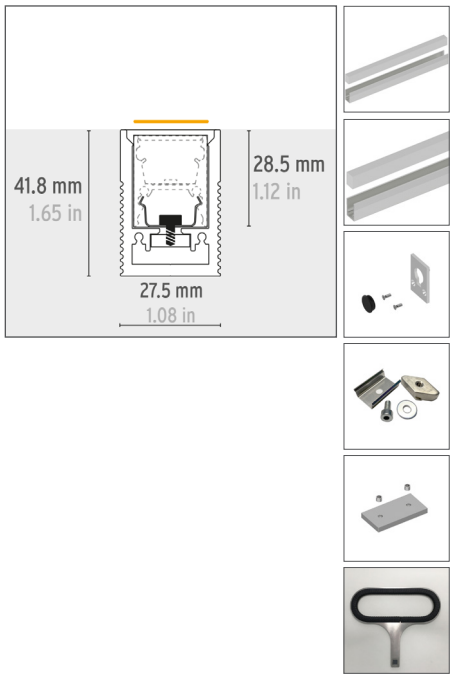

Mounting accessories	Description
INGROUND FRAME 2 M W/ DUMMY Art.-#: 10000639-2m	Aluminum in-ground mounting frame, silver anodized, in 2 m / 6.6 ft or 4 m / 13.1 ft lengths including styrofoam dummy. Cut to size on site.
INGROUND FRAME 4 M W/ DUMMY Art.-#: 10000639-4m	
INGROUND FRAME ENDCAP SET Art.-#: 11000310-SIL	Additional accessories required: End cap set, includes one end cap and two screws. Clip set includes one clip (number of clips < 400 mm = 2 clips, every 400 mm +1 clip). Mech. connector set includes one connector and two grub screws.
INGROUND FRAME CLIP SET Art.-#: 13000504	
INGROUND FRAME CONNECTOR Art.-#: 13000503	Suitable for pedestrian and vehicular use up to 10 kN. Drainage must be prepared on site.
DISASSEMBLY TOOL FOR INGROUND FRAME Art.-#: 13100032	For a line installation choose „X“ as part of the order code and order the inground frame and all accessories separately. Use according to the mounting instructions.

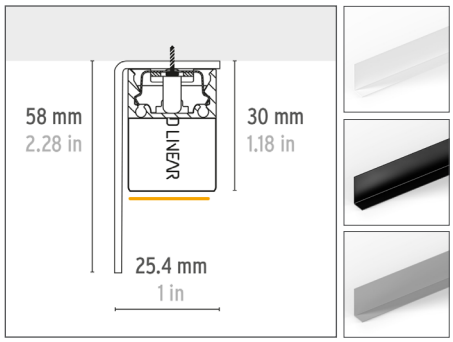

GLARE SHIELD WHITE - 1 M OR 2 M Art.-#: 10000622-RAL9003-1m or 10000622-RAL9003-2m	The glare shield can be combined with the following mounting accessories: SH | SV | ML
GLARE SHIELD BLACK - 1 M OR 2 M Art.-#: 10000622-RAL9005-1m or 10000622-RAL9005-2m	Glare is completely cut off to one side.
GLARE SHIELD GREY - 1 M OR 2 M Art.-#: 10000622-RAL9022-1m or 10000622-RAL9022-2m	Glare shield has to be cut on site to the needed lenght and prepared to be combined with the mounting accessory. DarkSky requires a downward-facing installation. Use according to the mounting instructions.

CABLING ACCESSORIES

Cables & Connectors: A complete overview of all extension cables and connectors and additional cabling accessory can be found on the global website: https://www.led-linear.com/products/cables-connectors

Not every product can be extended and used with every cable and connector system. Please contact your local sales team for further information.

PRODUCT FAMILY	CABLE ACCESSORY	INFORMATION	EXAMPLE
VENUS TC Family IP67 AMOR IP67 VARIO LED FLEX IP67 XOOLINE IP40 / IP67 ULTIMA Family IP40 LUNA IP40	VarioConnect IP67 Mini	Single shielded, flat, white cable IP67 connector male / female Different lengths for 2 up to 5 wires 2 wires = 0.34 mm² / 4 wires = 0.25 mm² 5 wires = 0.2 mm²	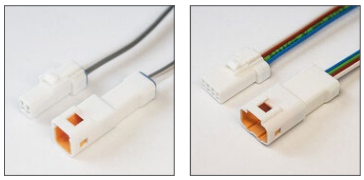
VENUS Family IP67 ADONIS IP67* FUSION IP67 XOOLUM IP40 / IP67* XOOLIGHT IP67 VARIOLED IP67	VarioConnect IP67	Double shielded, oval, black, IP68 cable IP67 connector male / female w/o nut Different lengths for 2 up to 4 wires 2 wires = 0.34 mm² / 4 wires = 0.25 mm²	
XOOCOVE IP40	VarioConnect IP20 Cove	IP20 connector system with 2 x 0.75mm²	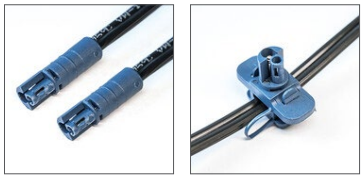
OCEANOS IP67	VarioCon Oceanos	IP67 connector system with 4 x 0.75mm² Stainless Steel Newton-Meter Clutch	
VARIO CABLE	Most products can be ordered with a open lead cable. Use the configurator „cable and connector configuration" to choose between „00" (open one side) and „0T"(open two side) cables, if possible.		
Assembled Solutions (North America only)	VarioConnect IP20 Mini	Single shielded, flate, white cable IP20 connector male / female Different lengths for 2 wires 2 wires = 0.34 mm²	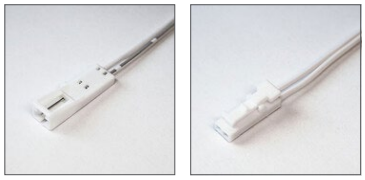

*RGBW cable is always a flat ribbon IP67 Mini cable and connector system.

POWER SUPPLY UNIT (PSU) & CONTROLS

Recommended PSU: A complete overview of all PSUs and controls with different power ratings can be found on the website:

GLOBAL https://www.led-linear.com/products/drivers-controls
USA https://www.ledlinearusa.com/products/drivers-controllers

Recommended controls: A complete overview of all controls can be found on the website:

GLOBAL https://www.led-linear.com/products/smart-lighting
USA https://www.ledlinearusa.com/products/drivers-controllers

Smart Lighting accessory: A complete overview of all smart lighting accessories and controls can be found on the website:

GLOBAL https://www.led-linear.com/products/smart-lighting

Example for „HYDRA EXL“ at 3.000K

CRI

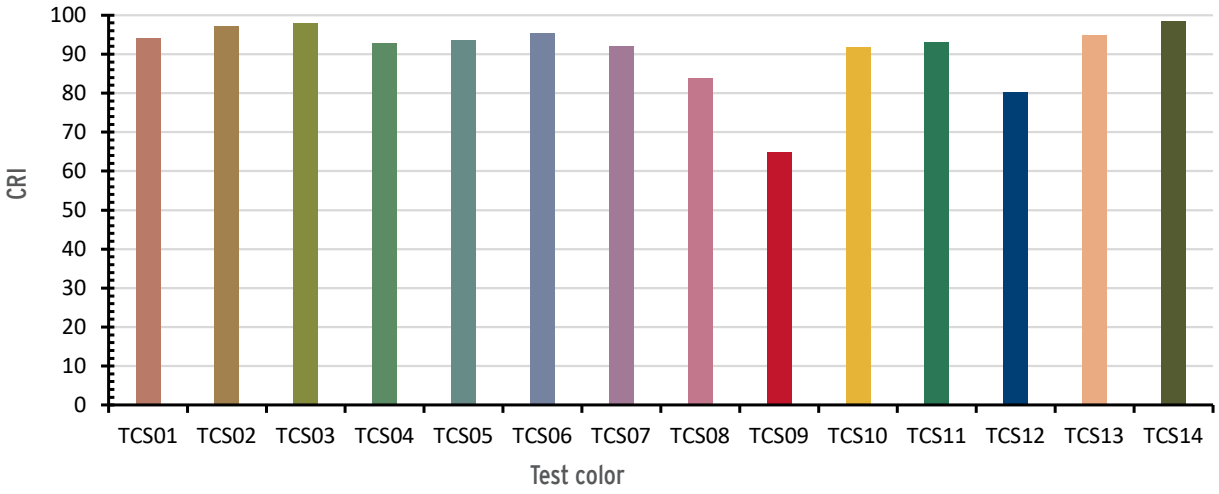

TM-30-18

Color Vector Graphig

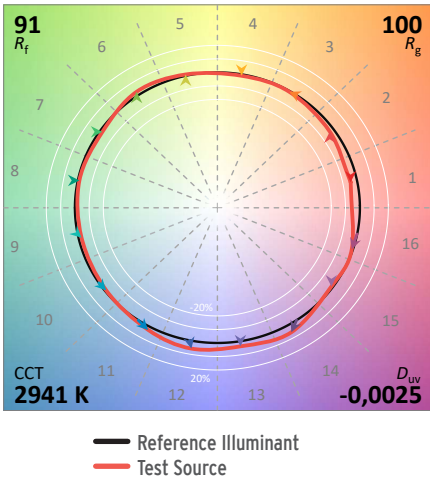

Shift in Hue-Chroma Plane

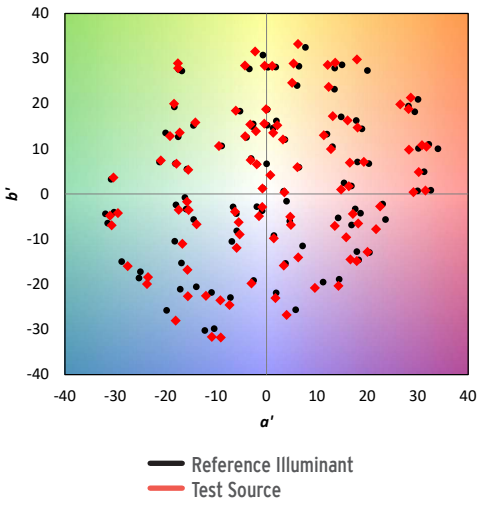

Gamut Index vs. Fidelity Index

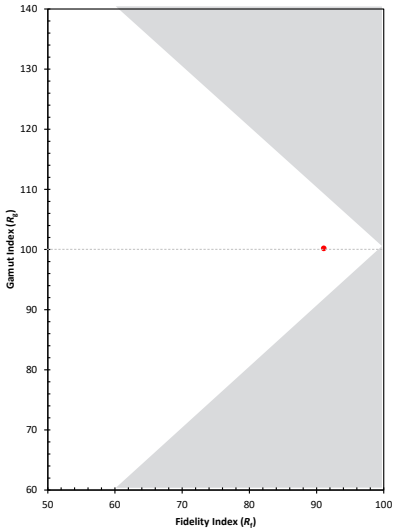

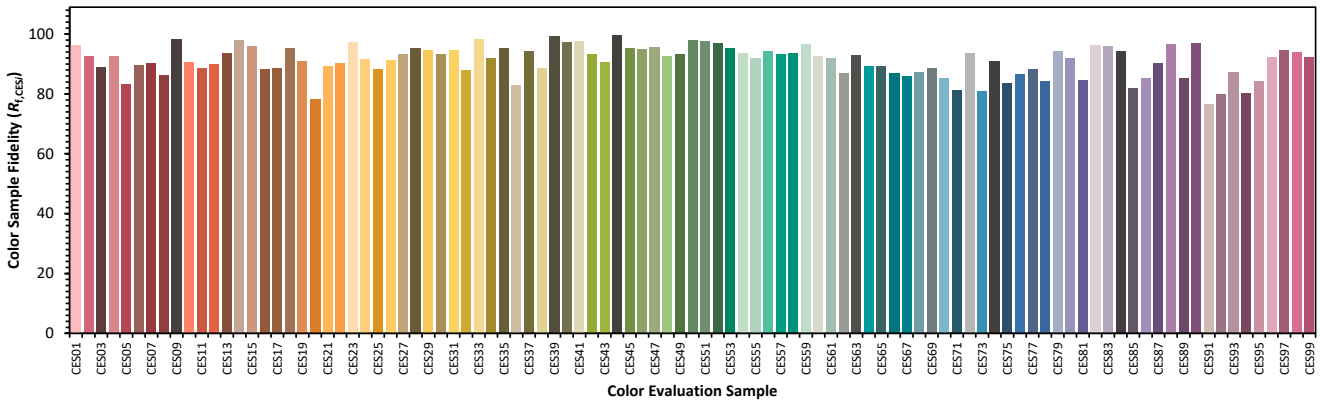

The Fidelity Index chart shows the color fidelity index for each of the 99 reference colors. The reference colors are arranged under the 5000 K reference source, which was also used to determine the color of each bar. The colors are approximate and depend on the correct monitor calibration. Some colors may be outside the color gamut of the monitor used and will not be displayed accurately.

Example for „HYDRA HE“ at 3.000K

CRI

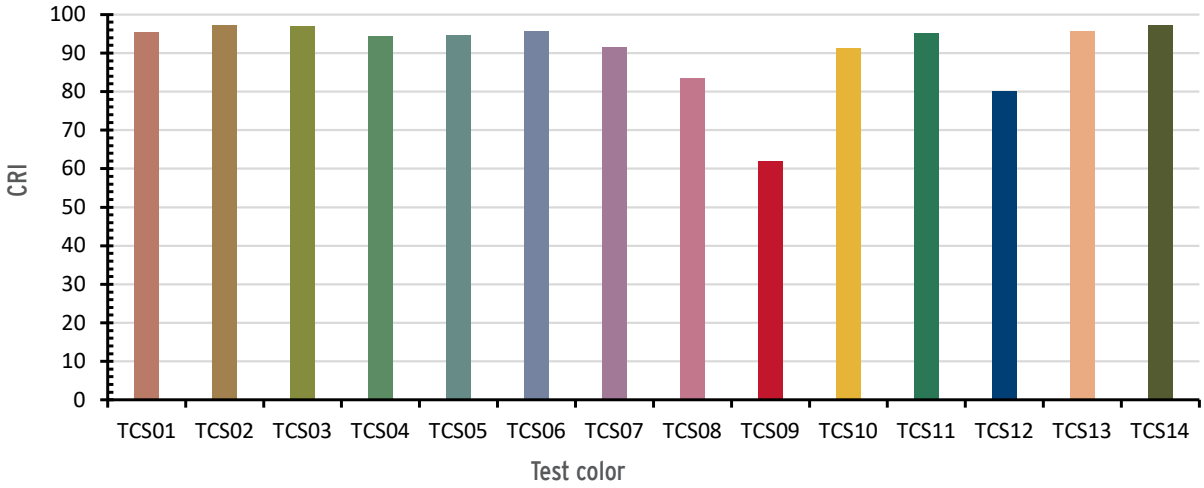

TM-30-18

Color Vector Graphig

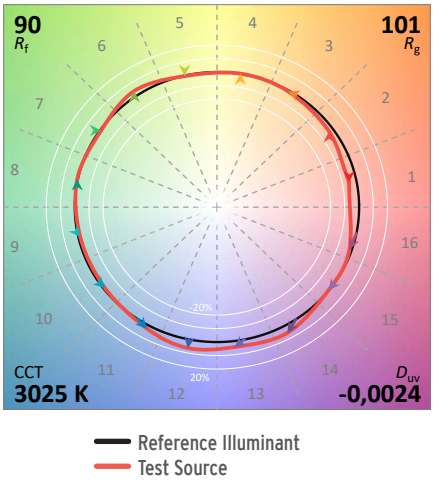

Shift in Hue-Chroma Plane

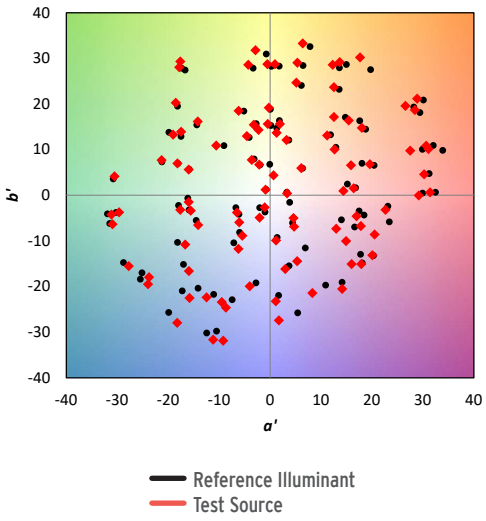

Gamut Index vs. Fidelity Index

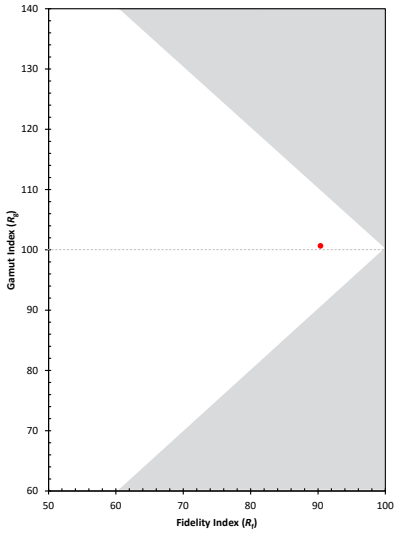

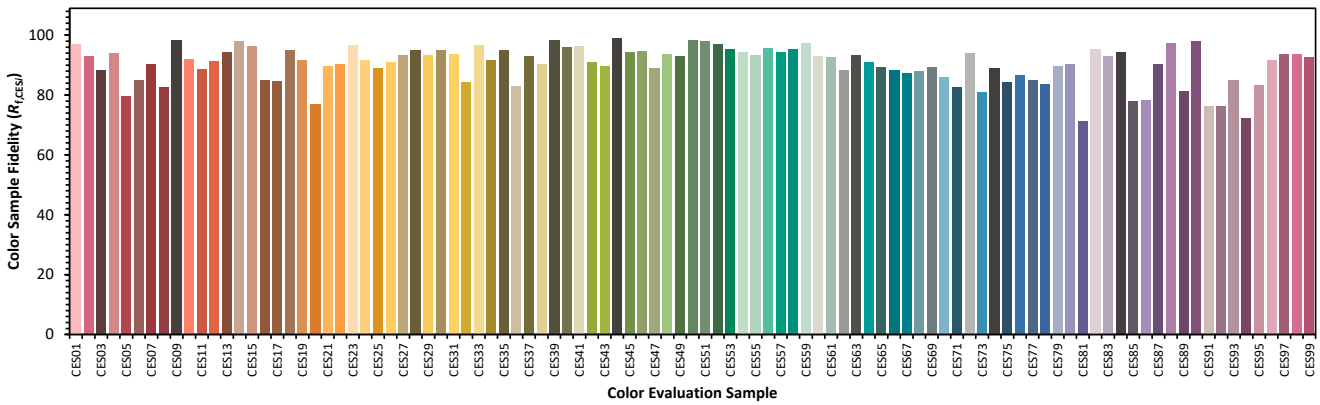

The Fidelity Index chart shows the color fidelity index for each of the 99 reference colors. The reference colors are arranged under the 5000 K reference source, which was also used to determine the color of each bar. The colors are approximate and depend on the correct monitor calibration. Some colors may be outside the color gamut of the monitor used and will not be displayed accurately.

Example for „HYDRA PRO“ at 3.000K

CRI

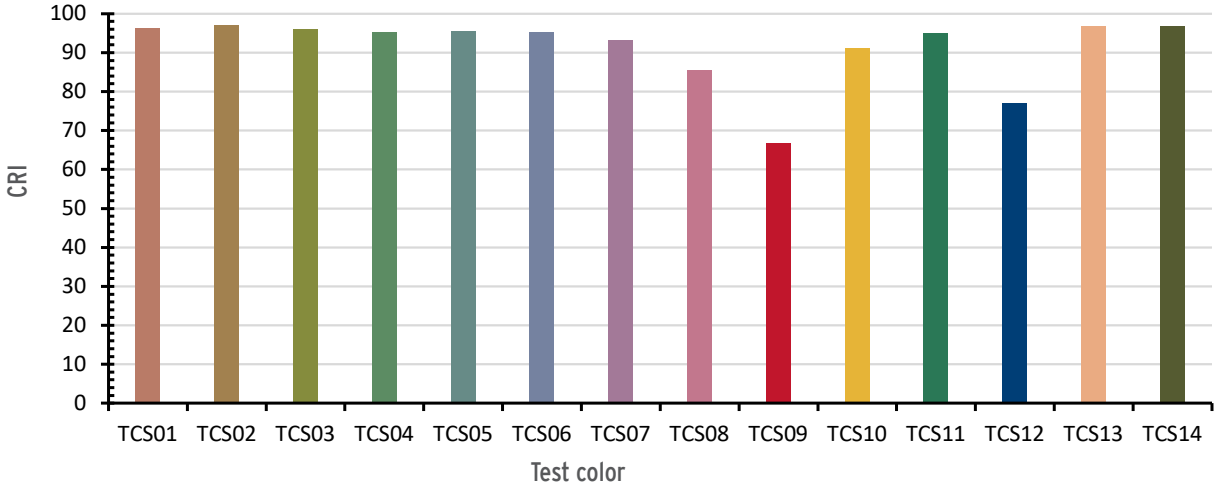

TM-30-18

Color Vector Graphig

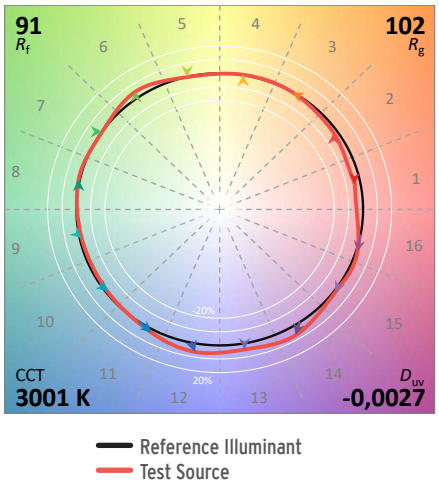

Shift in Hue-Chroma Plane

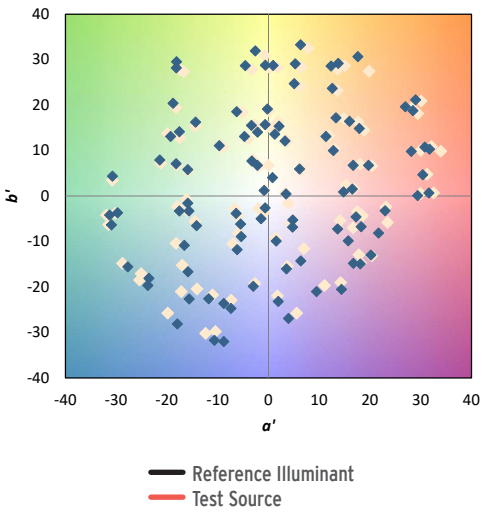

Gamut Index vs. Fidelity Index

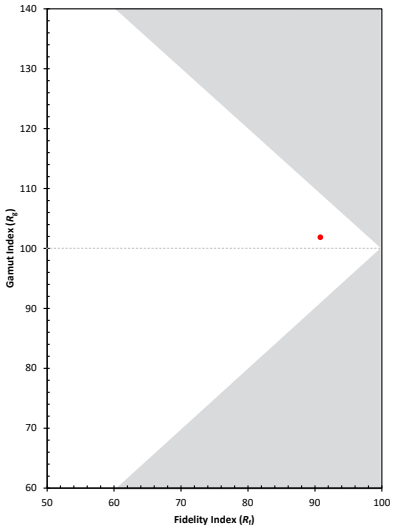

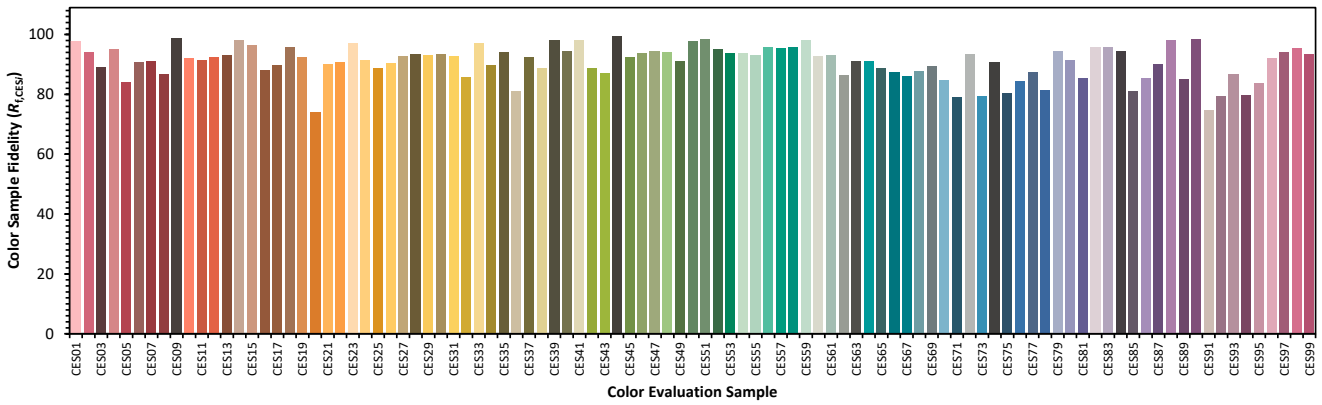

The Fidelity Index chart shows the color fidelity index for each of the 99 reference colors. The reference colors are arranged under the 5000 K reference source, which was also used to determine the color of each bar. The colors are approximate and depend on the correct monitor calibration. Some colors may be outside the color gamut of the monitor used and will not be displayed accurately.

VOLTAGE DROP INFORMATION FOR THE FEED-IN LINE (EXTERNAL PSU / CONTROL TO FIXTURE)

Cable cross section	mm²						
	0.25	0.34	0.5	0.75	1.0	1.5	2.5
Total wattage of light line* [W]	MAX. CABLE LENGTH BETWEEN PSU / CONTROL UNIT AND THE LUMINAIRE						
	m						
0 - 5	29	39	58	87	116	174	291
0 - 10	14	19	29	43	58	87	145
10 - 15	9.7	13	19	29	38	58	97
15 - 20	7.2	9.9	14	21	29	43	72
20 - 25	5.8	7.9	11	17	23	34	58
25 - 30	4.8	6.6	9.7	14	19	29	48
30 - 35	4.1	5.6	8.3	12	16	24	41
35 - 40	3.6	4.9	7.2	10	14	21	36
40 - 45	3.2	4.4	6.4	9.7	12	19	32
45 - 50	2.9	3.9	5.8	8.7	11	17	29
50 - 60	2.4	3.3	4.8	7.2	9.7	14	24
60 - 70	2.0	2.8	4.1	6.2	8.3	12	20
70 - 80	1.8	2.4	3.6	5.4	7.2	10	18
80 - 90	1.6	2.2	3.2	4.8	6.4	9.7	16
90 - 100	1.4	1.9	2.9	4.3	5.8	8.7	14
100 - 110	1.3	1.8	2.6	3.9	5.2	7.9	13
110 - 120	1.2	1.6	2.4	3.6	4.8	7.2	12.
120 - 130	1.1	1.5	2.2	3.3	4.4	6.7	11
130 - 140	1.0	1.4	2.0	3.1	4.1	6.2	10
140 - 150	0.9	1.3	1.9	2.9	3.8	5.8	9.7
150 - 160	0.9	1.2	1.8	2.7	3.6	5.4	9.1
170 - 180	0.8	1.1	1.6	2.4	3.2	4.8	8.0
180 - 190	0.7	1.0	1.5	2.3	3.0	4.6	7.6
190 - 200	0.7	0.9	1.4	2.1	2.9	4.3	7.2

Cable cross section	AWG						
	24	22	21	19	18	16	14
Total wattage of light line* [W]	MAX. CABLE LENGTH BETWEEN PSU / CONTROL UNIT AND THE LUMINAIRE						
	ft						
0 - 5	95	130	191	286	382	573	956
0 - 10	47	65	95	143	191	286	478
10 - 15	31	43	63	95	127	191	318
15 - 20	23	32	47	71	95	143	239
20 - 25	19	26	38	57	76	114	191
25 - 30	15	21	31	47	63	95	159
30 - 35	13	18	27	40	54	81	136
35 - 40	11	16	23	35	47	71	119
40 - 45	10	14	21	31	42	63	106
45 - 50	9.5	13	19	28	38	57	95
50 - 60	7.9	10	15	23	31	47	79
60 - 70	6.8	9.2	13	20	27	40	68
70 - 80	5.9	8.1	11	17	23	35	59
80 - 90	5.3	7.2	10	15	21	31	53
90 - 100	4.7	6.5	9.5	14	19	28	47
100 - 110	4.3	5.9	8.6	13	17	26	43
110 - 120	3.9	5.4	7.9	11.9	15	23	39
120 - 130	3.6	5.0	7.3	11	14	22	36
130 - 140	3.4	4.6	6.8	10	13	20	34
140 - 150	3.1	4.3	6.3	9.5	12	19	31
150 - 160	2.9	4.0	5.9	8.9	11	17	29
170 - 180	2.6	3.6	5.3	7.9	10.6	15	26
180 - 190	2.5	3.4	5.0	7.5	10	15	25
190 - 200	2.3	3.2	4.7	7.1	9.5	14	23

*** Multiply the number of lights within the light line by the wattage per m or ft to determine the total power of the light line.**

Please note, these cables are not supplied by the factory. For table calculation, the underscored power level is used.
Calculation refers to the cable configuration on site for static white applications.
For tunable white, RGB, RGBW or other multichannel luminaires, the individual wattage per channel must be considered.
This might differ due the control type used.
The information listed in the table only refers to the conductor-based voltage drop of max. 0.85V at 24V DC input voltage.

Regarding the electromagnetic combability (EMC) the maximum cable length is defined by the power supply manufacturer.
A cable length between power supply and planned product longer than indicated by the datasheet of the power supply is possible. However the electromagnetic combability can then be influenced by the conditions of the installation site. There is no data on electromagnetic compatibility for longer cable lengths, which might lead to the necessity of an evaluation of the electromagnetic compatibility by a third party.
Datasheets and mounting instructions of the components in combination with the planned product must be carefully read and followed.