


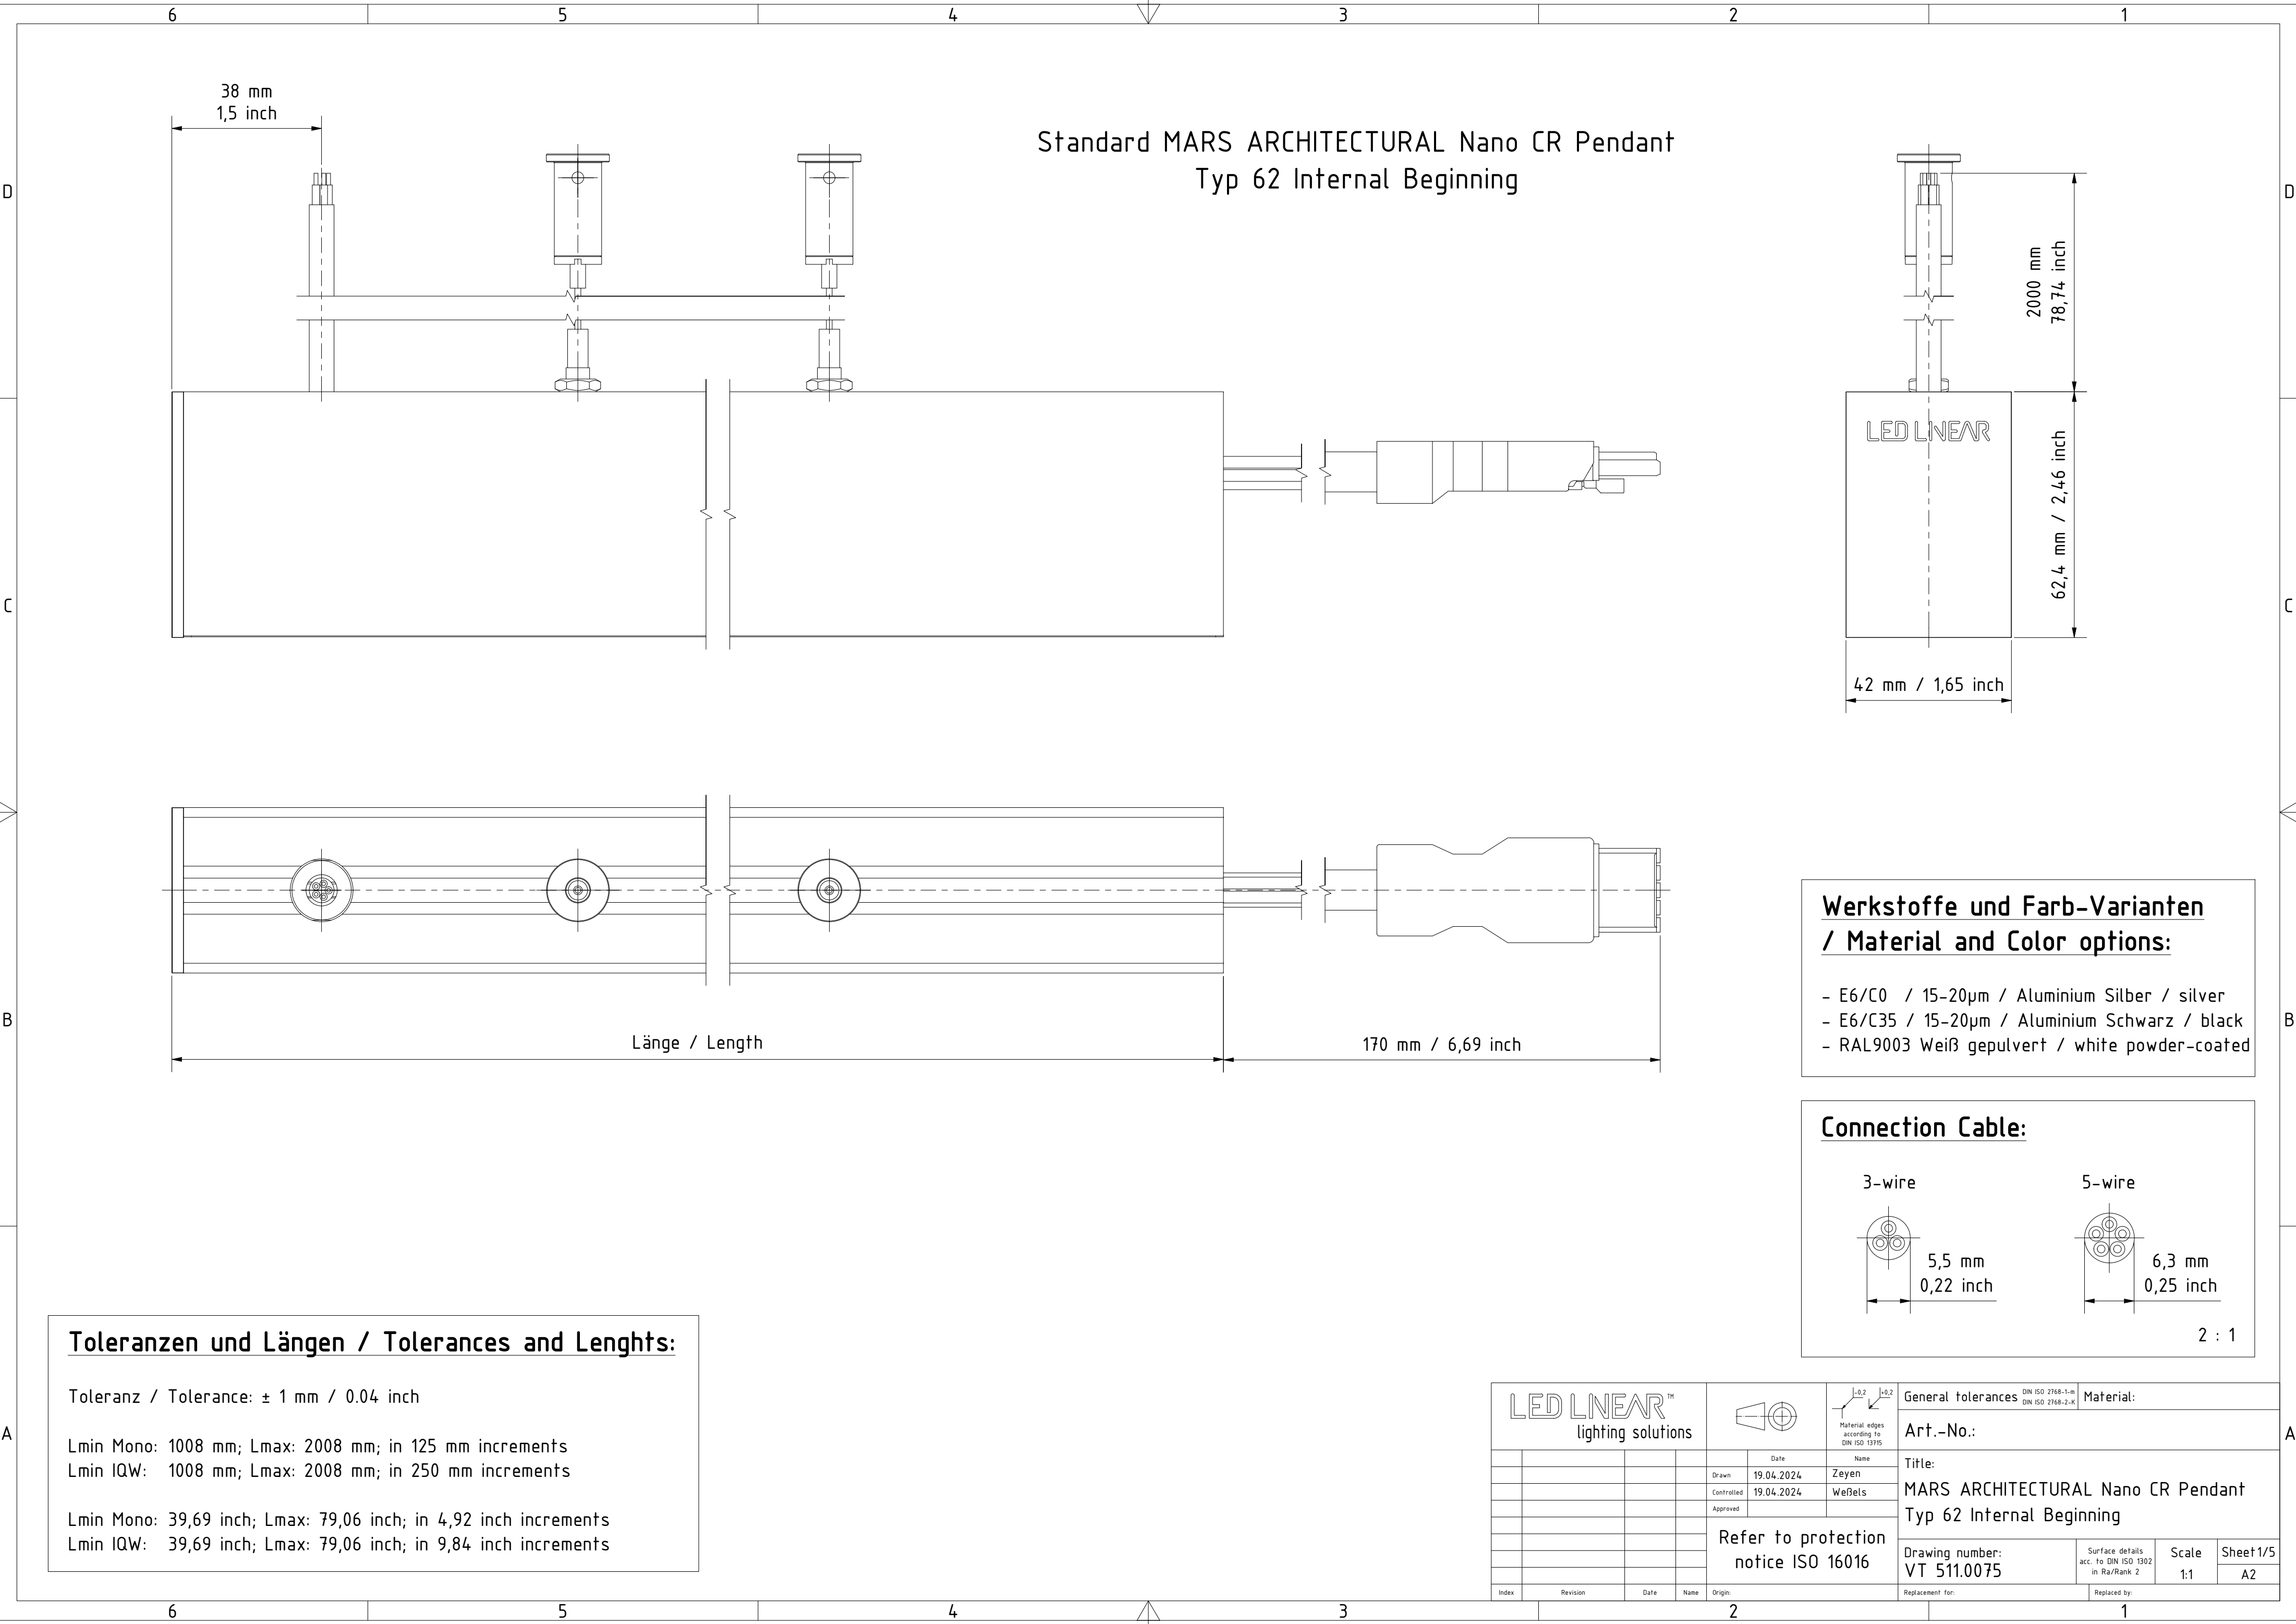

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$


Lmin Mono: 1008 mm; Lmax: 2008 mm; in 125 mm increments
Lmin IQW: 1008 mm; Lmax: 2008 mm; in 250 mm increments

Lmin Mono: 39,69 inch; Lmax: 79,06 inch; in 4,92 inch increments
Lmin IQW: 39,69 inch; Lmax: 79,06 inch; in 9,84 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:

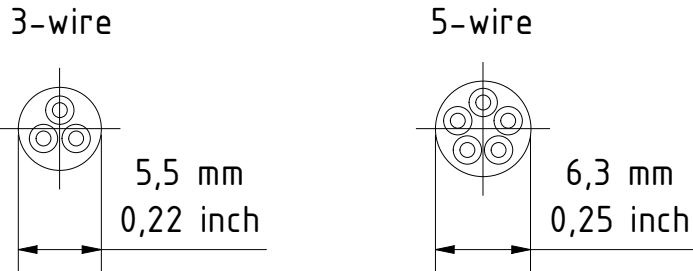

2 : 1

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:			
								Art.-No.:					
				Date		Name		Title:					
				Drawn 19.04.2024		Zeyen		MARS ARCHITECTURAL Nano CR Pendant					
				Controlled 19.04.2024		Weßels		Typ 62 Internal Beginning					
				Approved				Drawing number: VT 511.0075					
						Refer to protection notice ISO 16016		Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet 1/5 A2		
Index		Revision		Date		Name		Origin:		Replacement for:		Replaced by:	

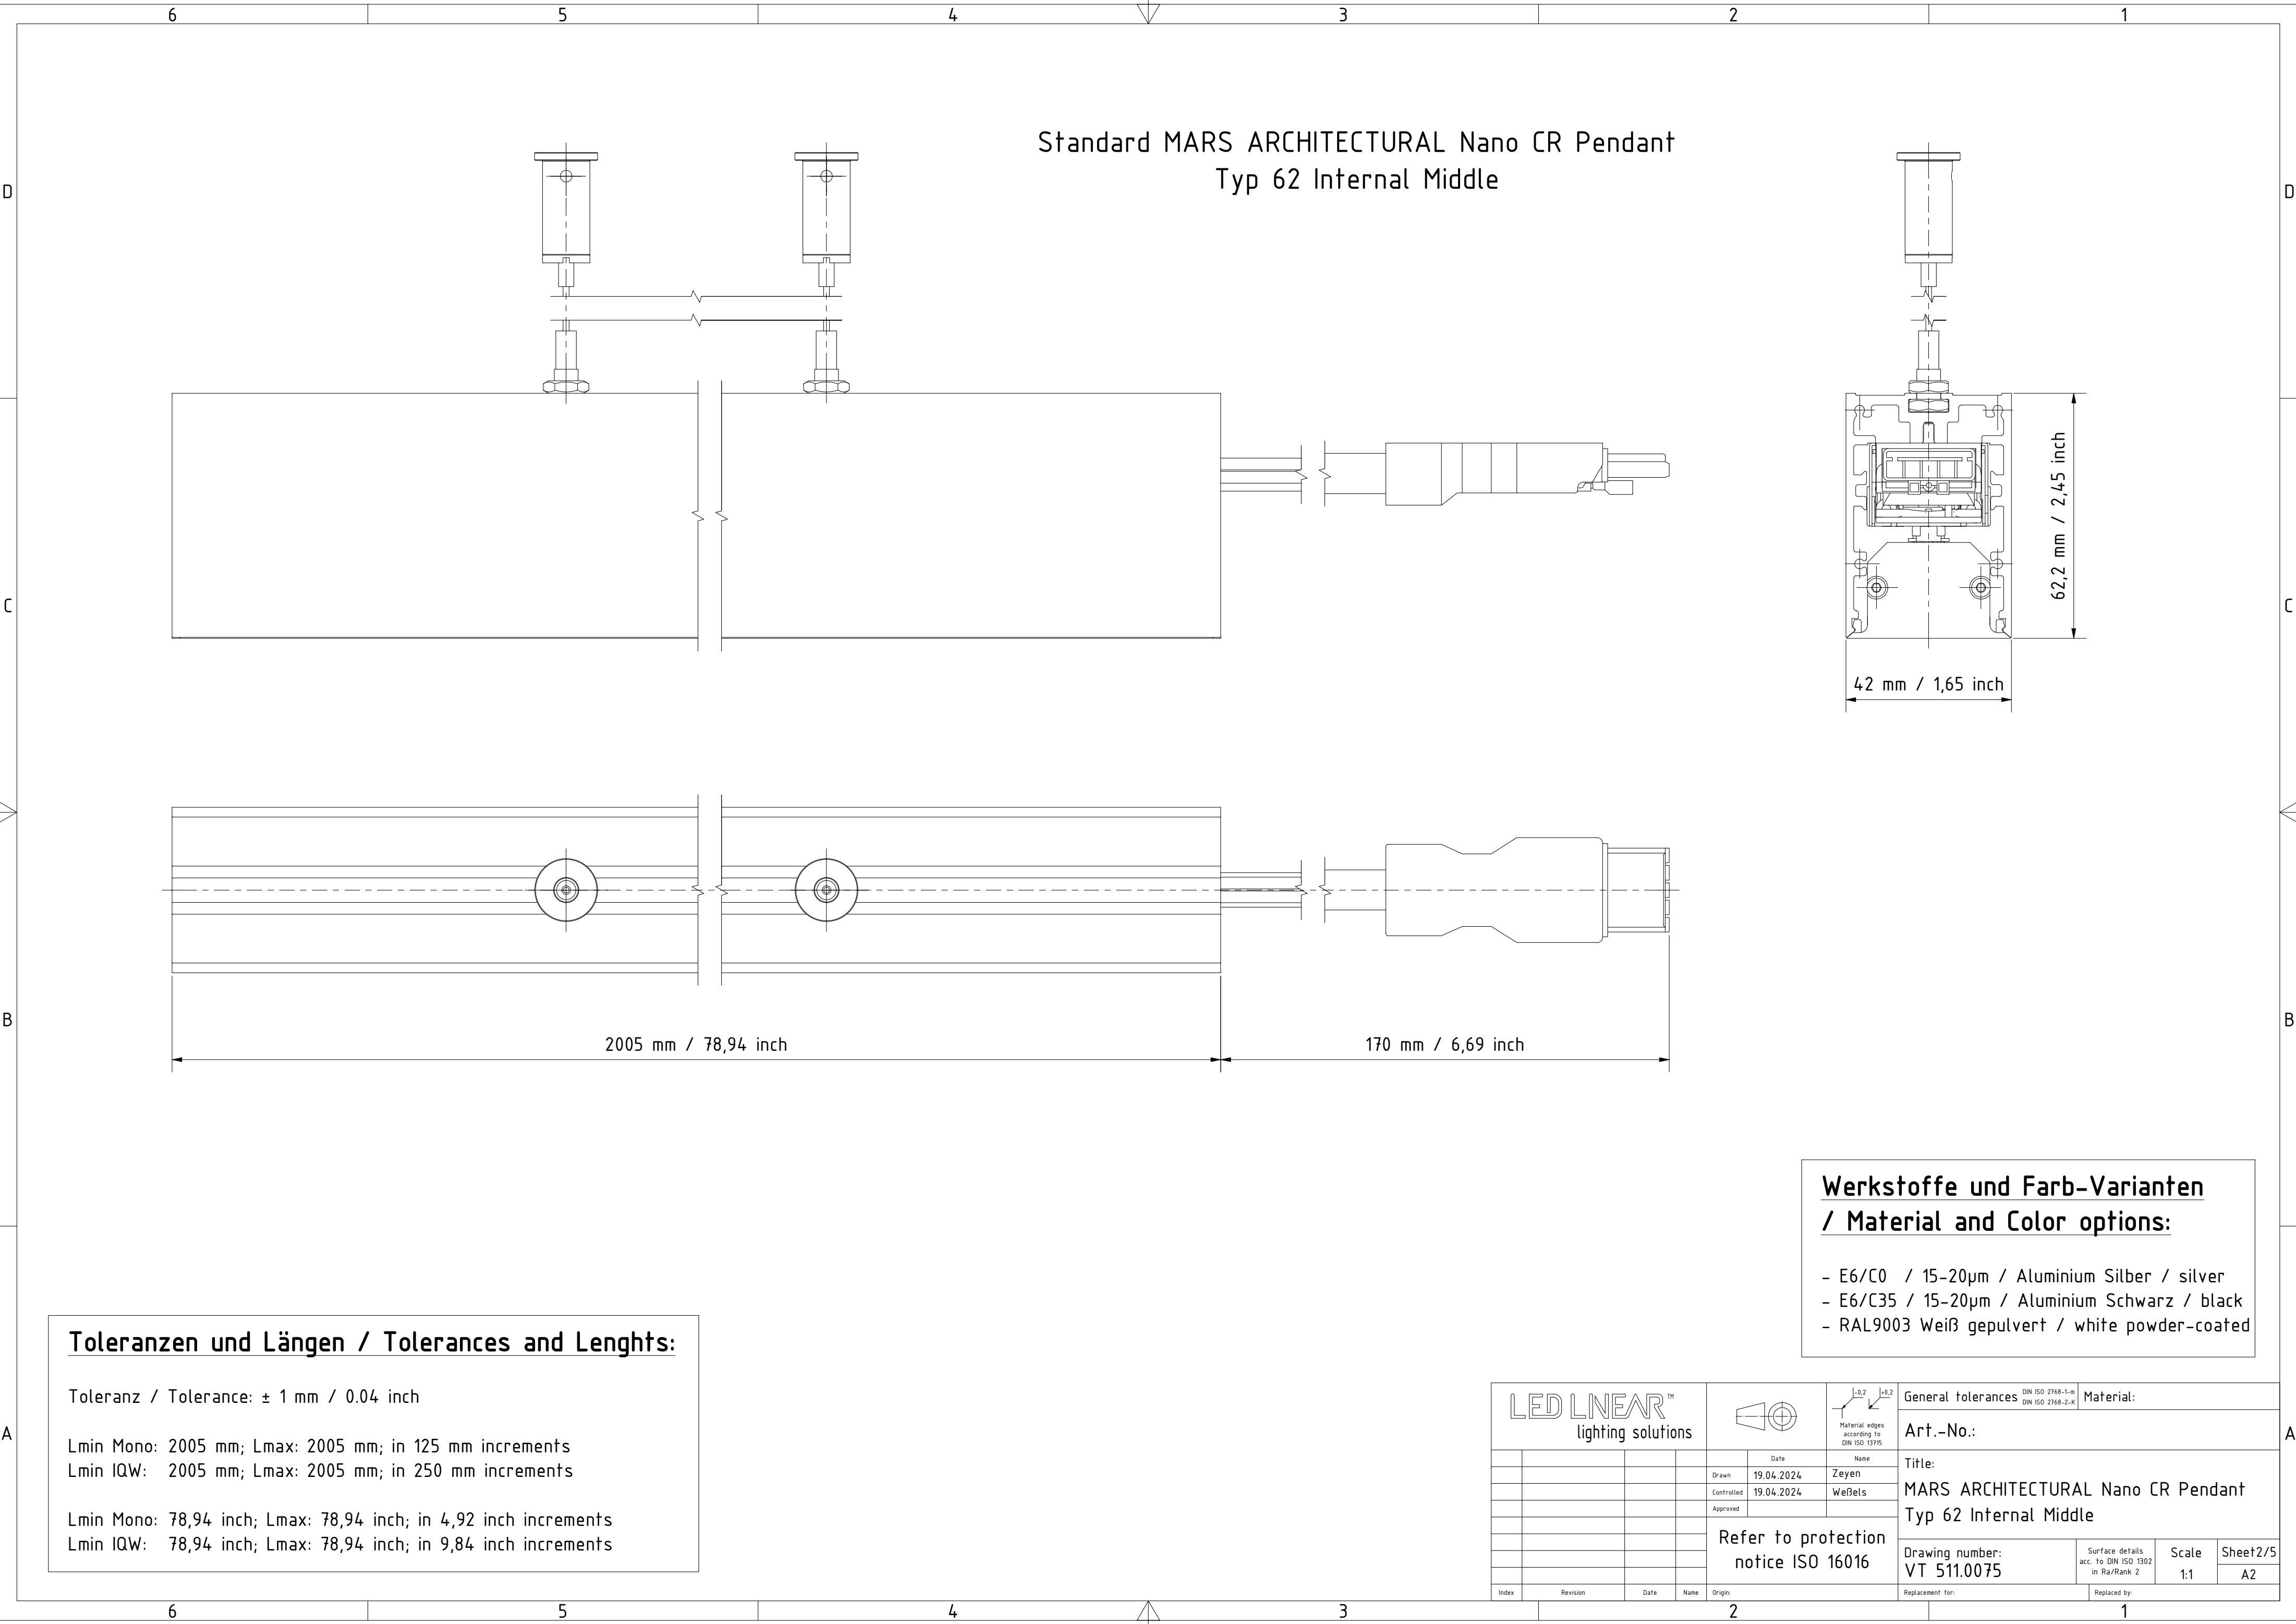

Standard MARS ARCHITECTURAL Nano CR Pendant
Typ 62 Internal Middle

Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$


Lmin Mono: 2005 mm; Lmax: 2005 mm; in 125 mm increments
Lmin IQW: 2005 mm; Lmax: 2005 mm; in 250 mm increments

Lmin Mono: 78,94 inch; Lmax: 78,94 inch; in 4,92 inch increments
Lmin IQW: 78,94 inch; Lmax: 78,94 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
					Date	Name	Art.-No.:				
				Drawn	19.04.2024	Zeyen	Title:				
				Controlled	19.04.2024	Weßels	MARS ARCHITECTURAL Nano CR Pendant Typ 62 Internal Middle				
				Approved			Drawing number: VT 511.0075				
				Refer to protection notice ISO 16016			Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet2/5 A2	
							Replacement for:		Replaced by:		
Index	Revision	Date	Name	Origin:							

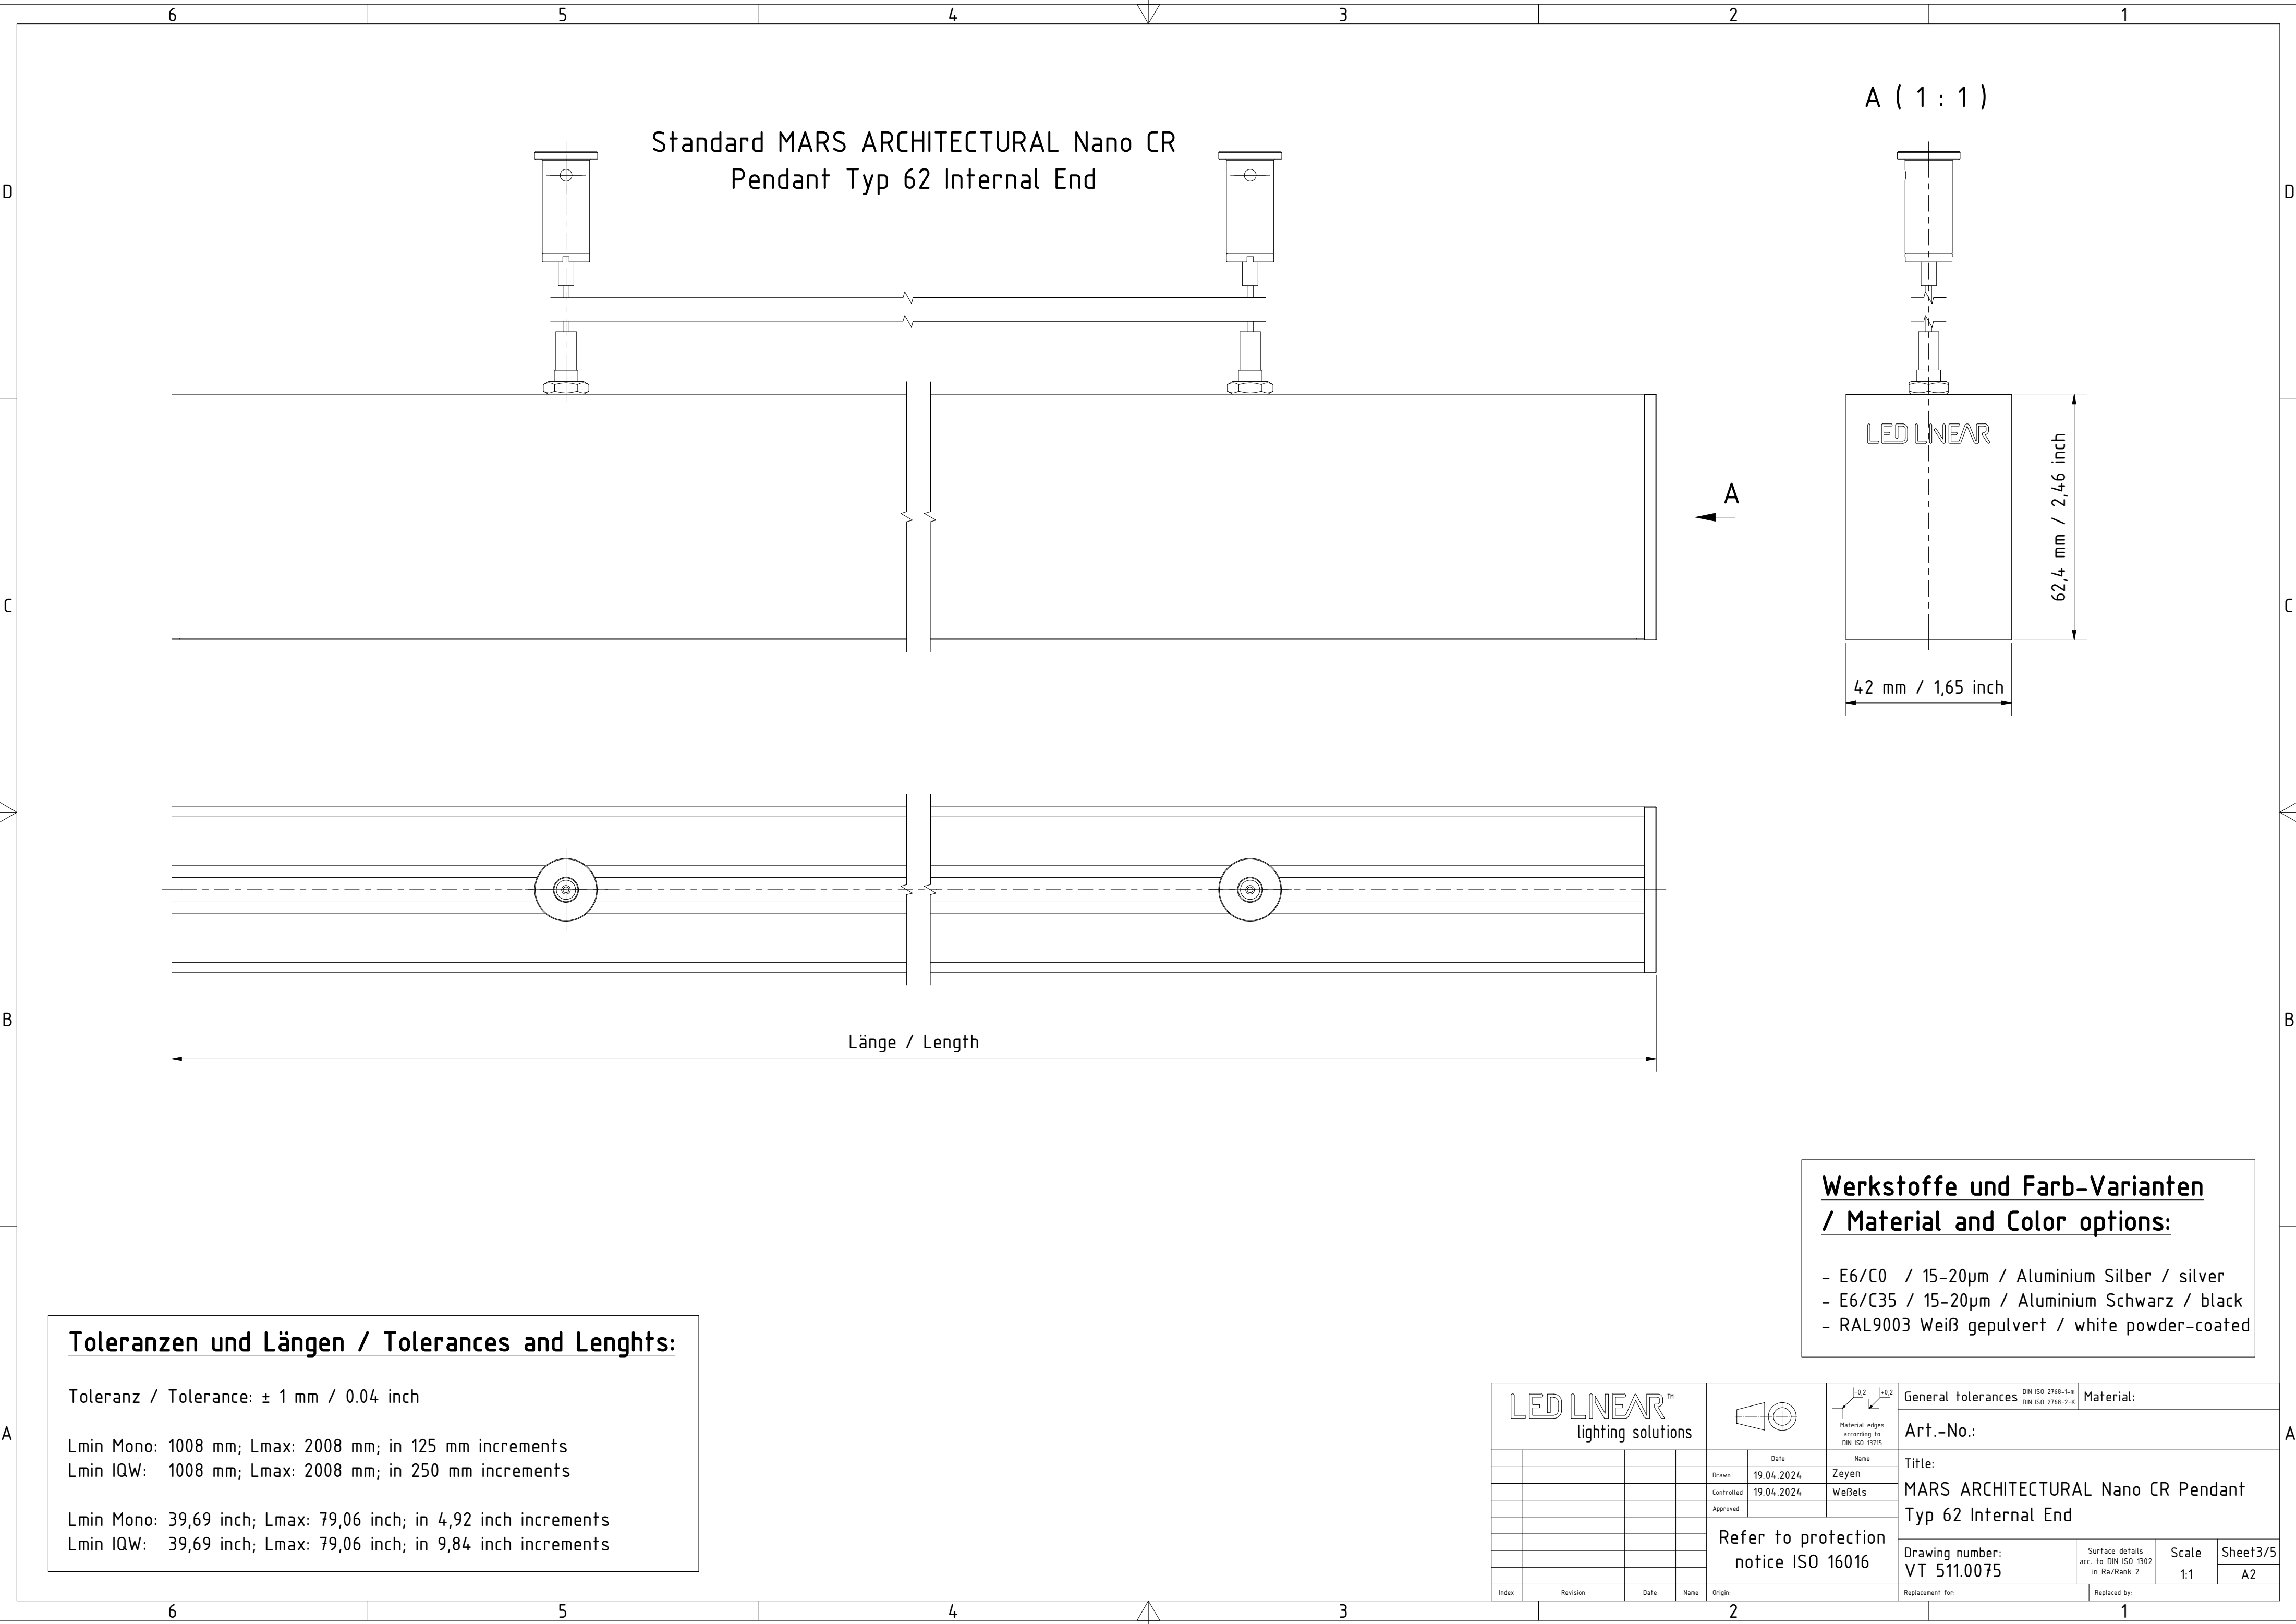

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 1008 mm; Lmax: 2008 mm; in 125 mm increments
Lmin IQW: 1008 mm; Lmax: 2008 mm; in 250 mm increments

Lmin Mono: 39,69 inch; Lmax: 79,06 inch; in 4,92 inch increments
Lmin IQW: 39,69 inch; Lmax: 79,06 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	19.04.2024	Zeyen		Art.-No.:				
				Controlled	19.04.2024	Weßels		Title:				
				Approved				MARS ARCHITECTURAL Nano CR Pendant Typ 62 Internal End				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0075		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/5 A2
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:			

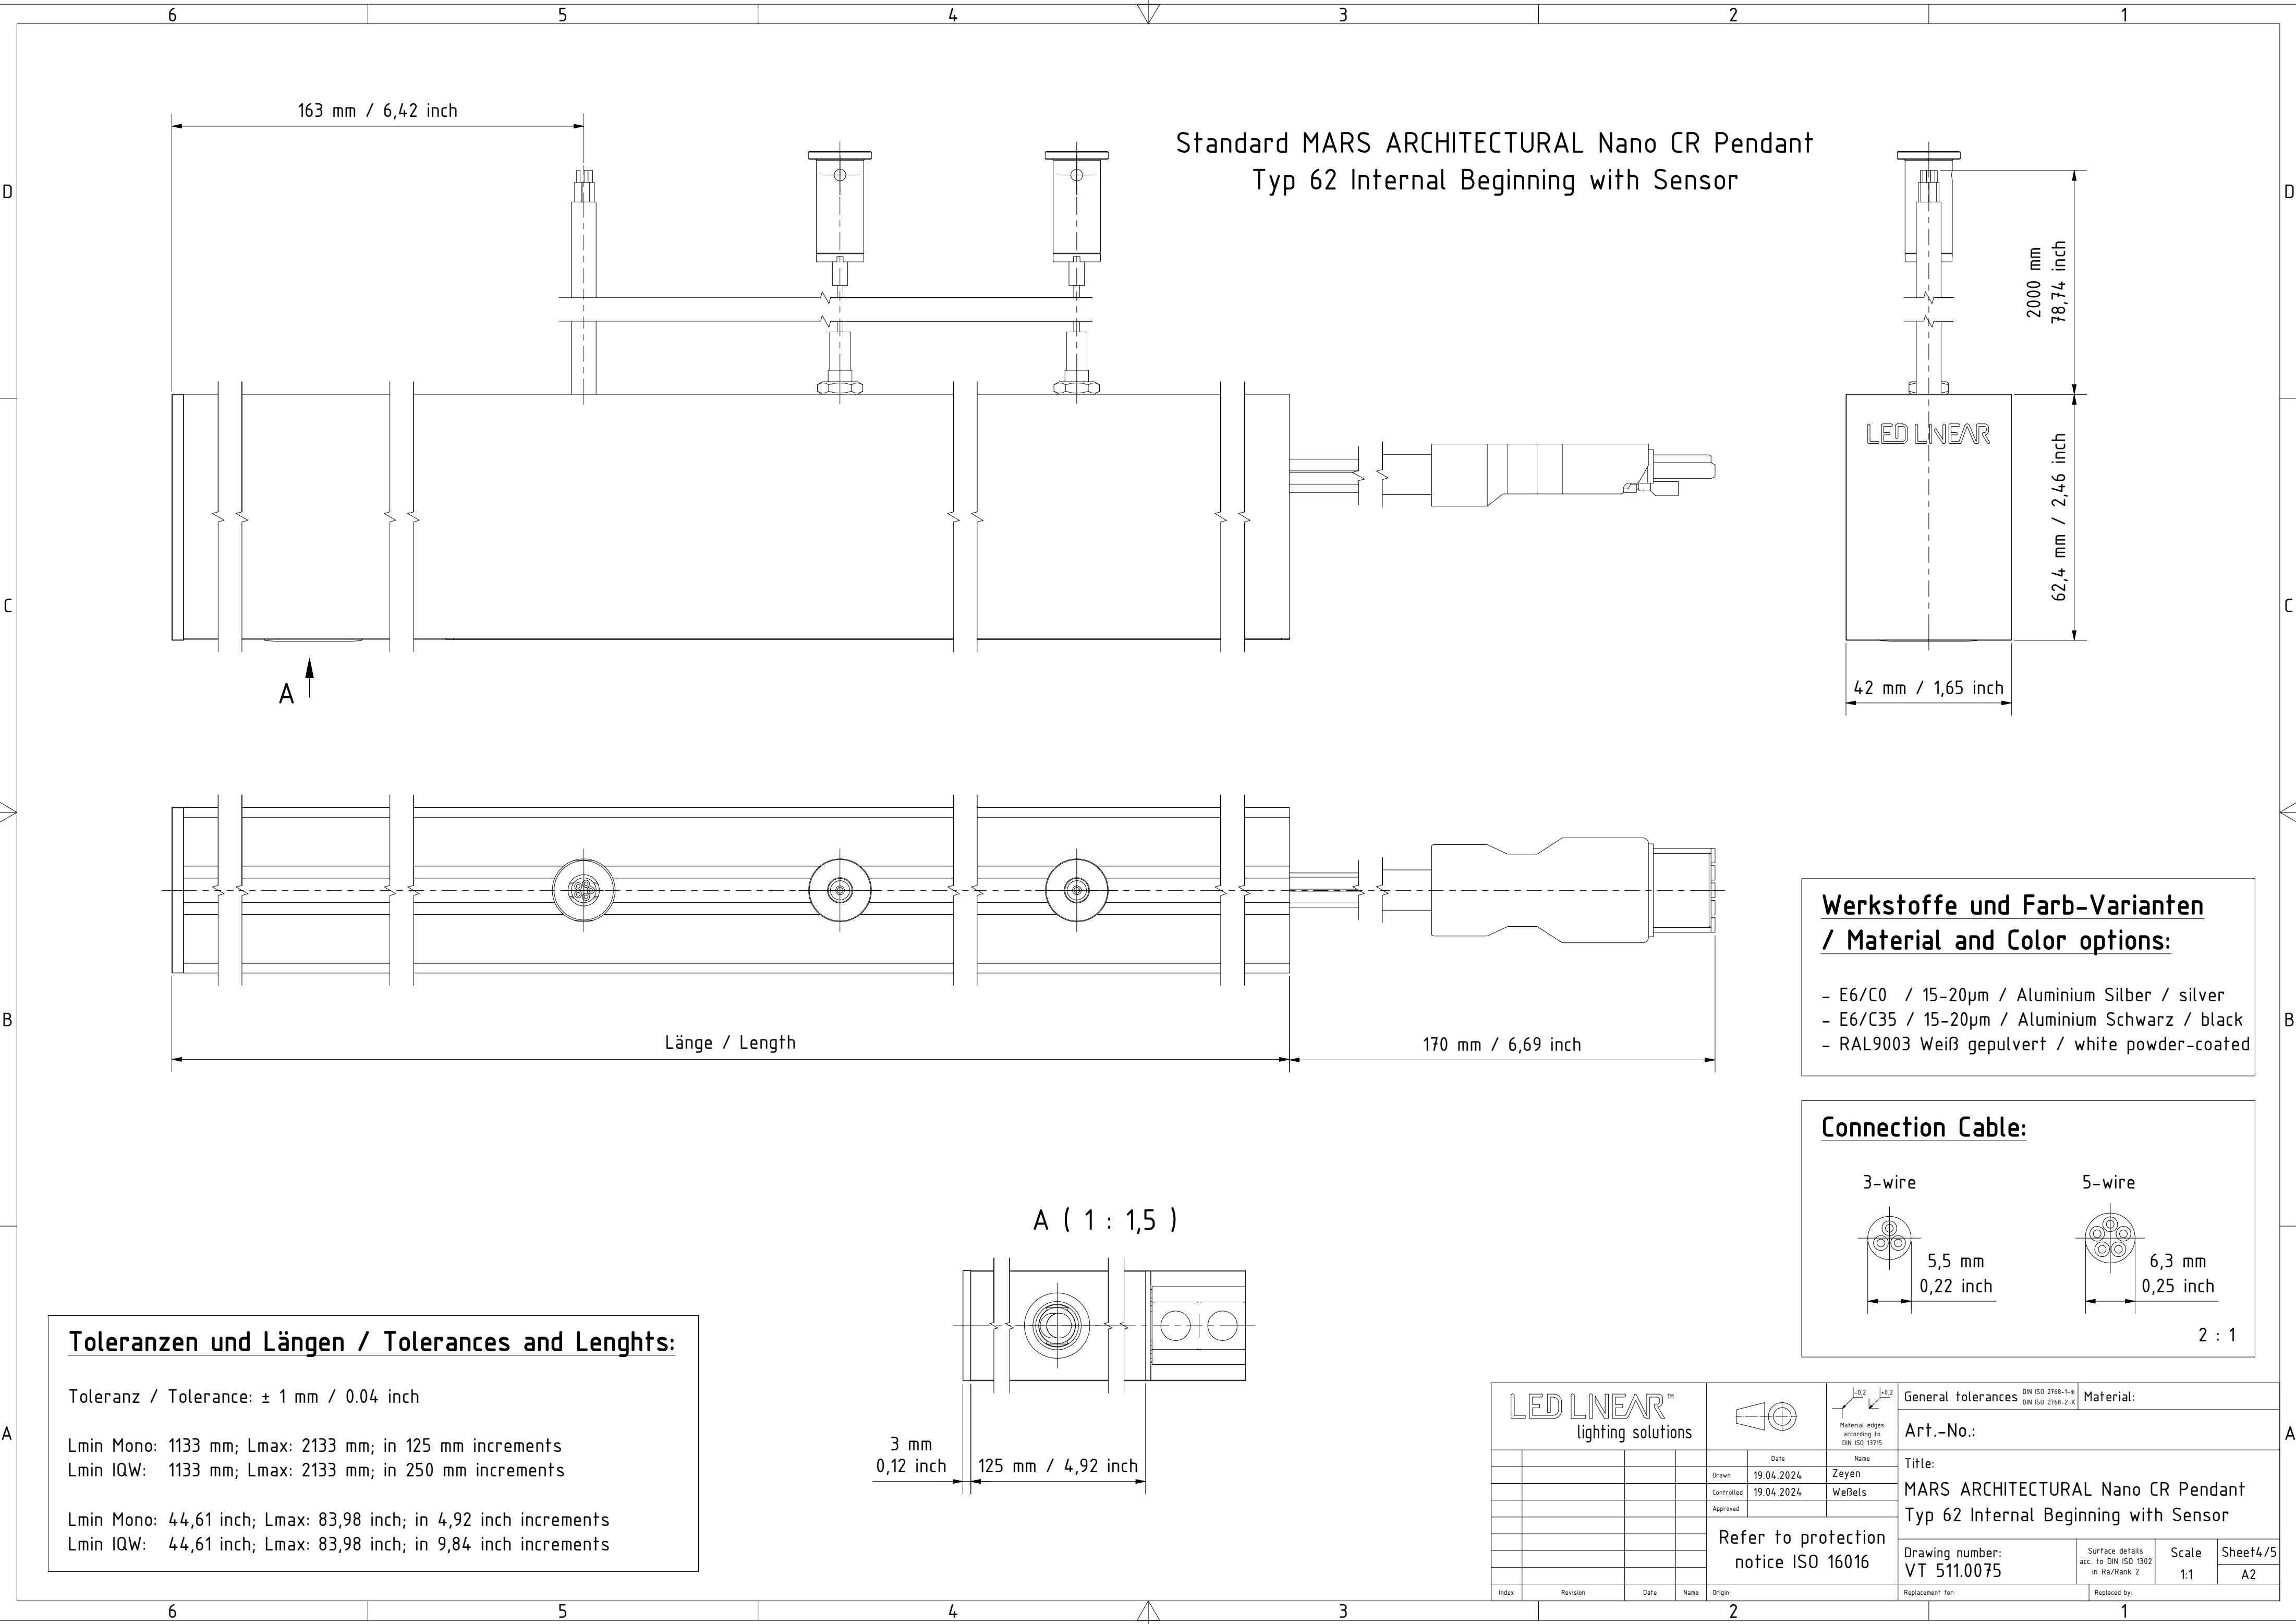


Standard MARS ARCHITECTURAL Nano CR Pendant
Typ 62 Internal Beginning with Sensor

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:

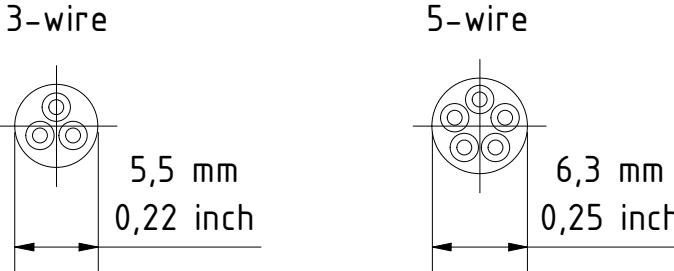



Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1133 mm; Lmax: 2133 mm; in 125 mm increments
Lmin IQW: 1133 mm; Lmax: 2133 mm; in 250 mm increments

Lmin Mono: 44,61 inch; Lmax: 83,98 inch; in 4,92 inch increments
Lmin IQW: 44,61 inch; Lmax: 83,98 inch; in 9,84 inch increments

LED LINEAR TM lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
				Date		Name		Title:				
				Drawn	19.04.2024	Zeyen		MARS ARCHITECTURAL Nano CR Pendant				
				Controlled	19.04.2024	Weßels		Typ 62 Internal Beginning with Sensor				
				Approved				Drawing number:				
				Refer to protection notice ISO 16016			VT 511.0075		Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet4/5
Index	Revision	Date	Name	Origin:					Replacement for:		Replaced by:	

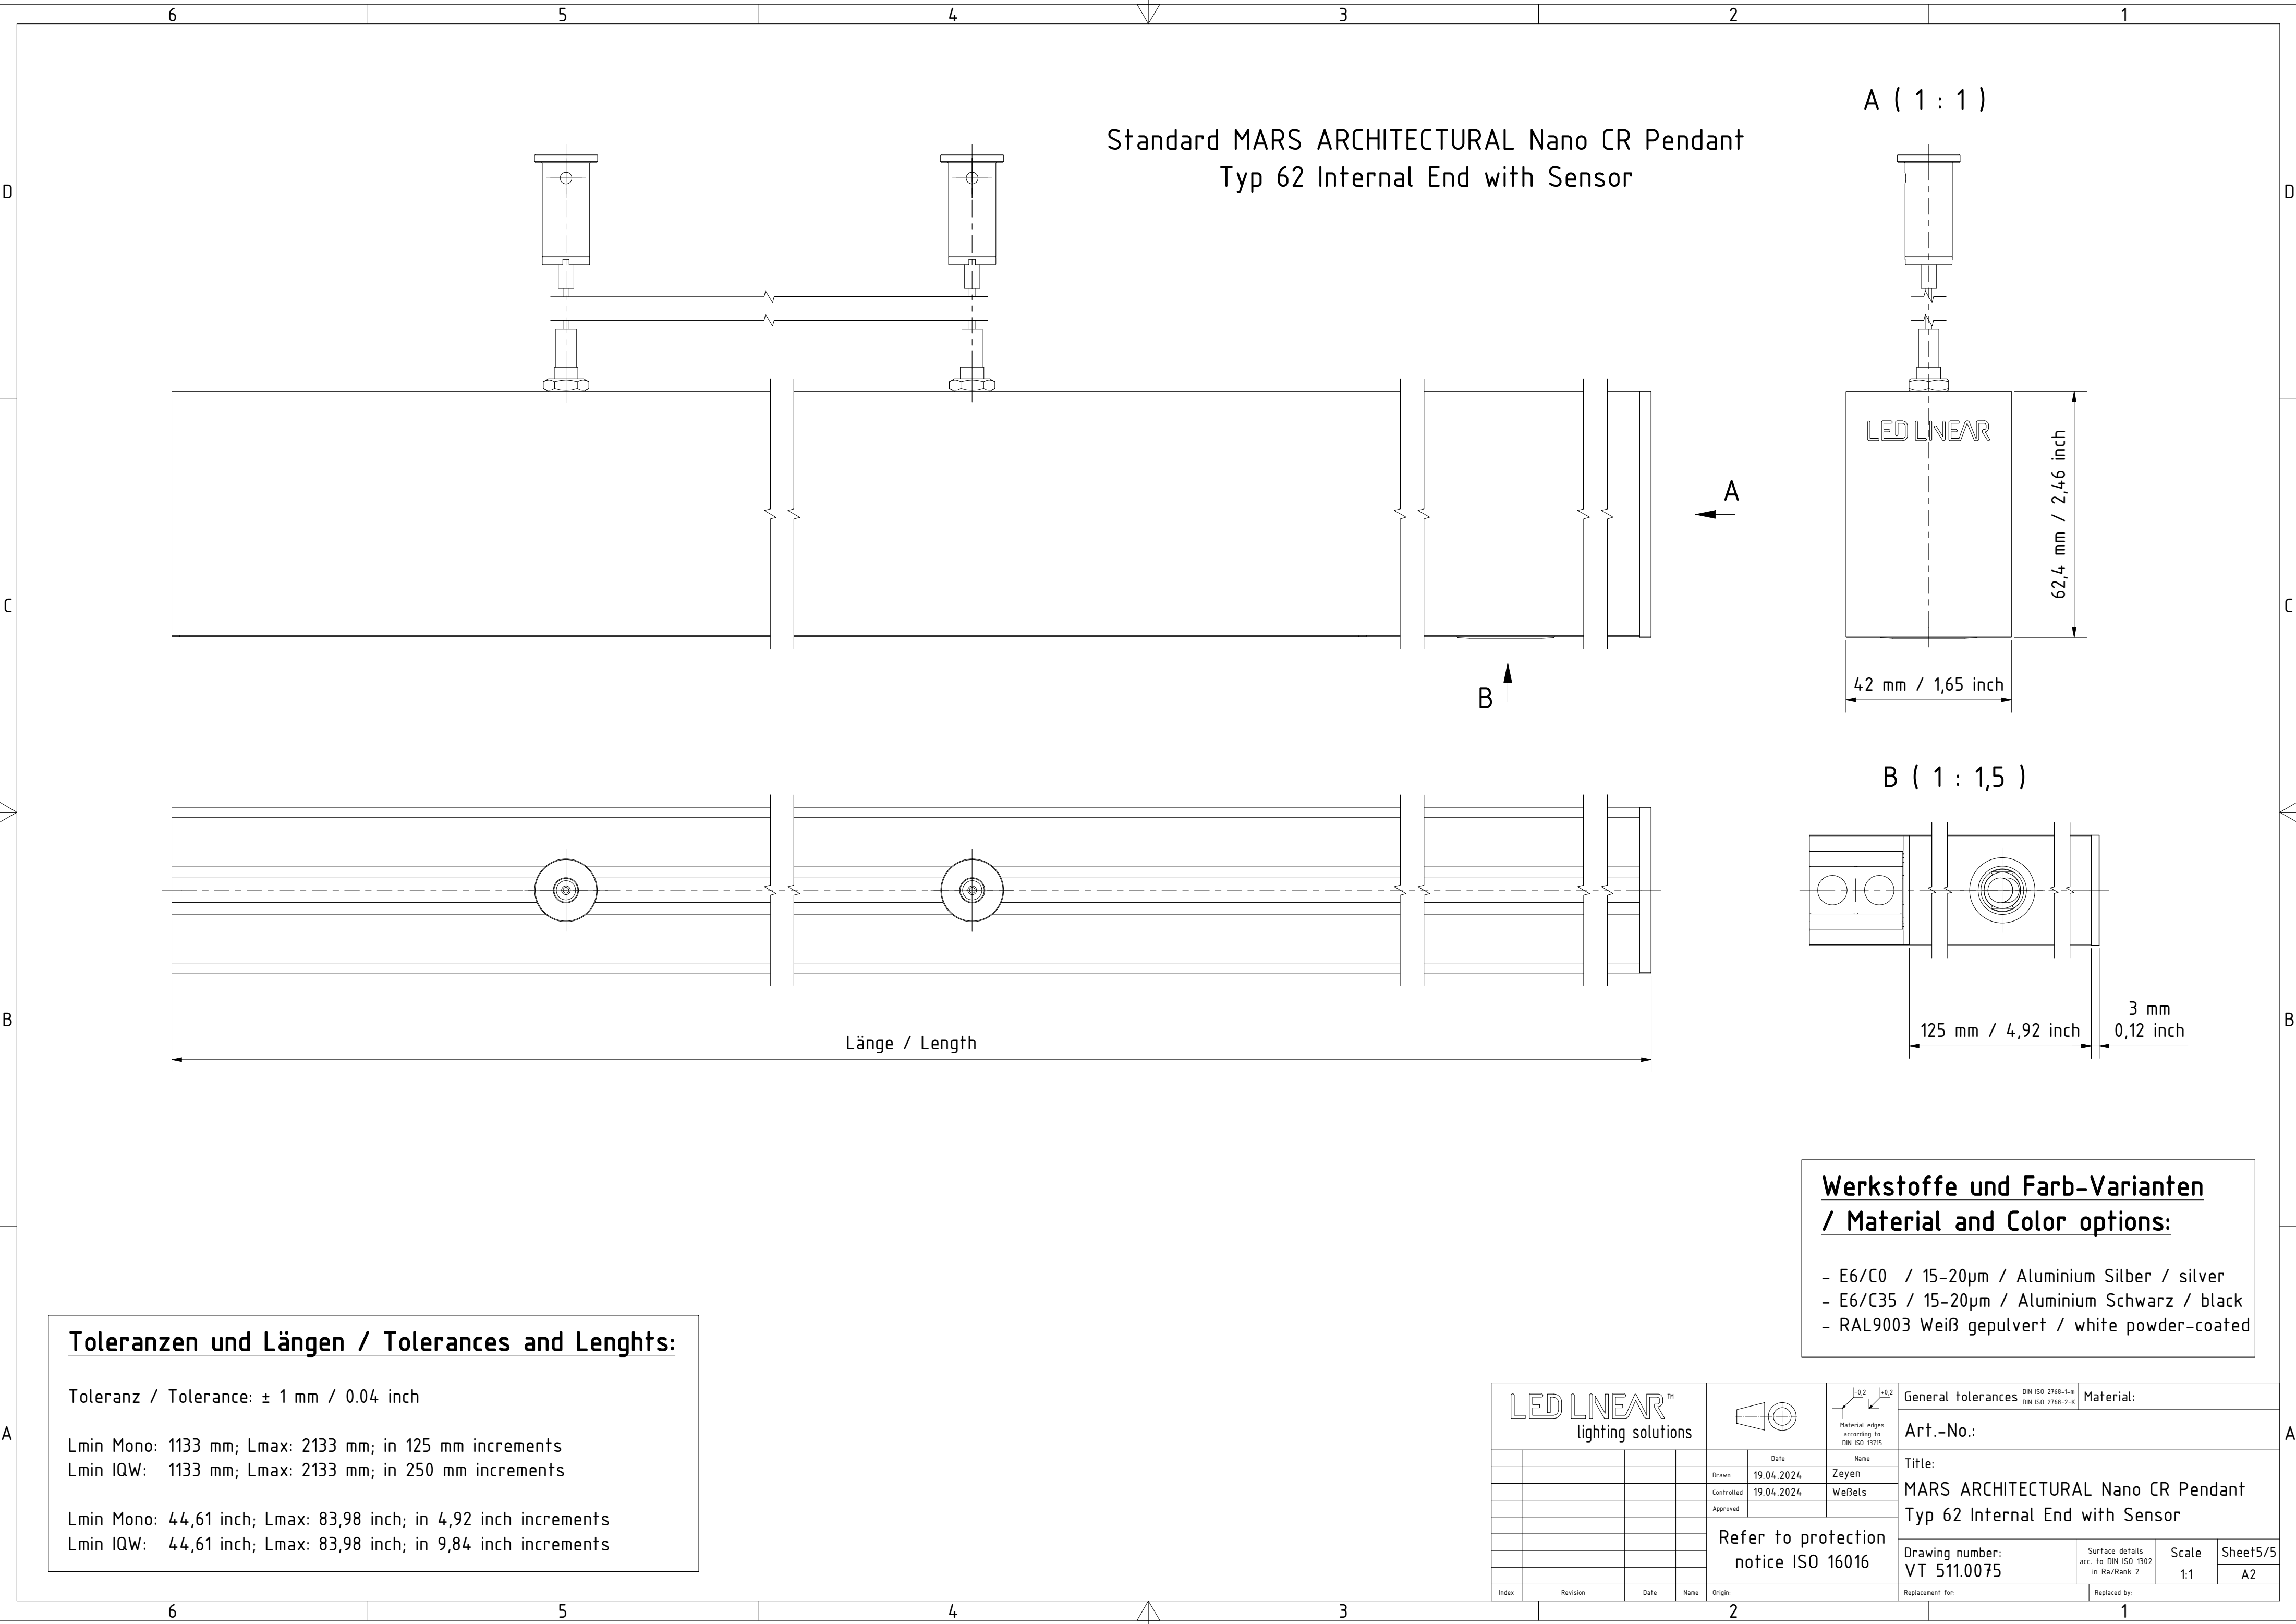

Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 1133 mm; Lmax: 2133 mm; in 125 mm increments
Lmin IQW: 1133 mm; Lmax: 2133 mm; in 250 mm increments

Lmin Mono: 44,61 inch; Lmax: 83,98 inch; in 4,92 inch increments
Lmin IQW: 44,61 inch; Lmax: 83,98 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:					
				Date		Name		Art.-No.:							
				Drawn	19.04.2024	Zeyen		Title:							
				Controlled	19.04.2024	Weßels		MARS ARCHITECTURAL Nano CR Pendant Typ 62 Internal End with Sensor							
				Approved											
				Refer to protection notice ISO 16016											
								Drawing number: VT 511.0075		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet5/5 A2			
Index				Revision		Date		Name		Origin:		Replacement for:		Replaced by:	