

Standard MARS ARCHITECTURAL Nano CR Recessed
Typ 62 Internal Beginning

7 mm
0,28 inch

64,9 mm / 2,56 inch

32,4 mm
1,28 inch

65 mm / 2,56 inch

max. 22 mm
max. 0,866 inch

42 mm / 1,65 inch

58,8 mm / 2,31 inch

62,2 mm / 2,45 inch

38 mm
1,5 inch

100 mm / 3,94 inch

100 mm / 3,94 inch

93 mm / 3,66 inch

90 mm / 3,54 inch

170 mm / 6,69 inch

Länge / Length

Ø8 mm
Ø0,32 inch

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 1008 mm; Lmax: 2008 mm; in 125 mm increments
Lmin IQW: 1008 mm; Lmax: 2008 mm; in 250 mm increments

Lmin Mono: 39,69 inch; Lmax: 79,06 inch; in 4,92 inch increments
Lmin IQW: 39,69 inch; Lmax: 79,06 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated


LED LINEAR™ lighting solutions				Material edges according to DIN ISO 15715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Date		Name		Art.-No.:	
				Drawn 19.04.2024		Zeyen		Title:	
				Controlled 19.04.2024		Weßels		MARS ARCHITECTURAL Nano CR Recessed Typ 62 Internal Beginning	
				Approved				Drawing number:	
				Refer to protection notice ISO 16016				VT 511.0076	
								Surface details acc. to DIN ISO 1302 in Ra/Rank 2	
								Scale	
								1:1	
								Sheet 1/5	
								A2	
Index				Revision		Date		Name	
Origin:								Replacement for:	
								Replaced by:	

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated


Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch

Lmin Mono: 39,69 inch; Lmax: 79,06 inch; in 4,92 inch increments
Lmin IQW: 39,69 inch; Lmax: 79,06 inch; in 9,84 inch increments

						 Material edges according to DIN ISO 13115		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Date		Name		Art.-No.:			
				Drawn 19.04.2024		Zeyen		Title:			
				Controlled 19.04.2024		Weßels		MARS ARCHITECTURAL Nano CR Recessed			
				Approved				Typ 62 Internal Beginning			
				Refer to protection notice ISO 16016							
Index		Revision		Date		Name		Origin:		Drawing number: VT 511.0076	
								Replacement for:		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	
								Replaced by:		Scale 1:1	
										Sheet 1/5 A2	

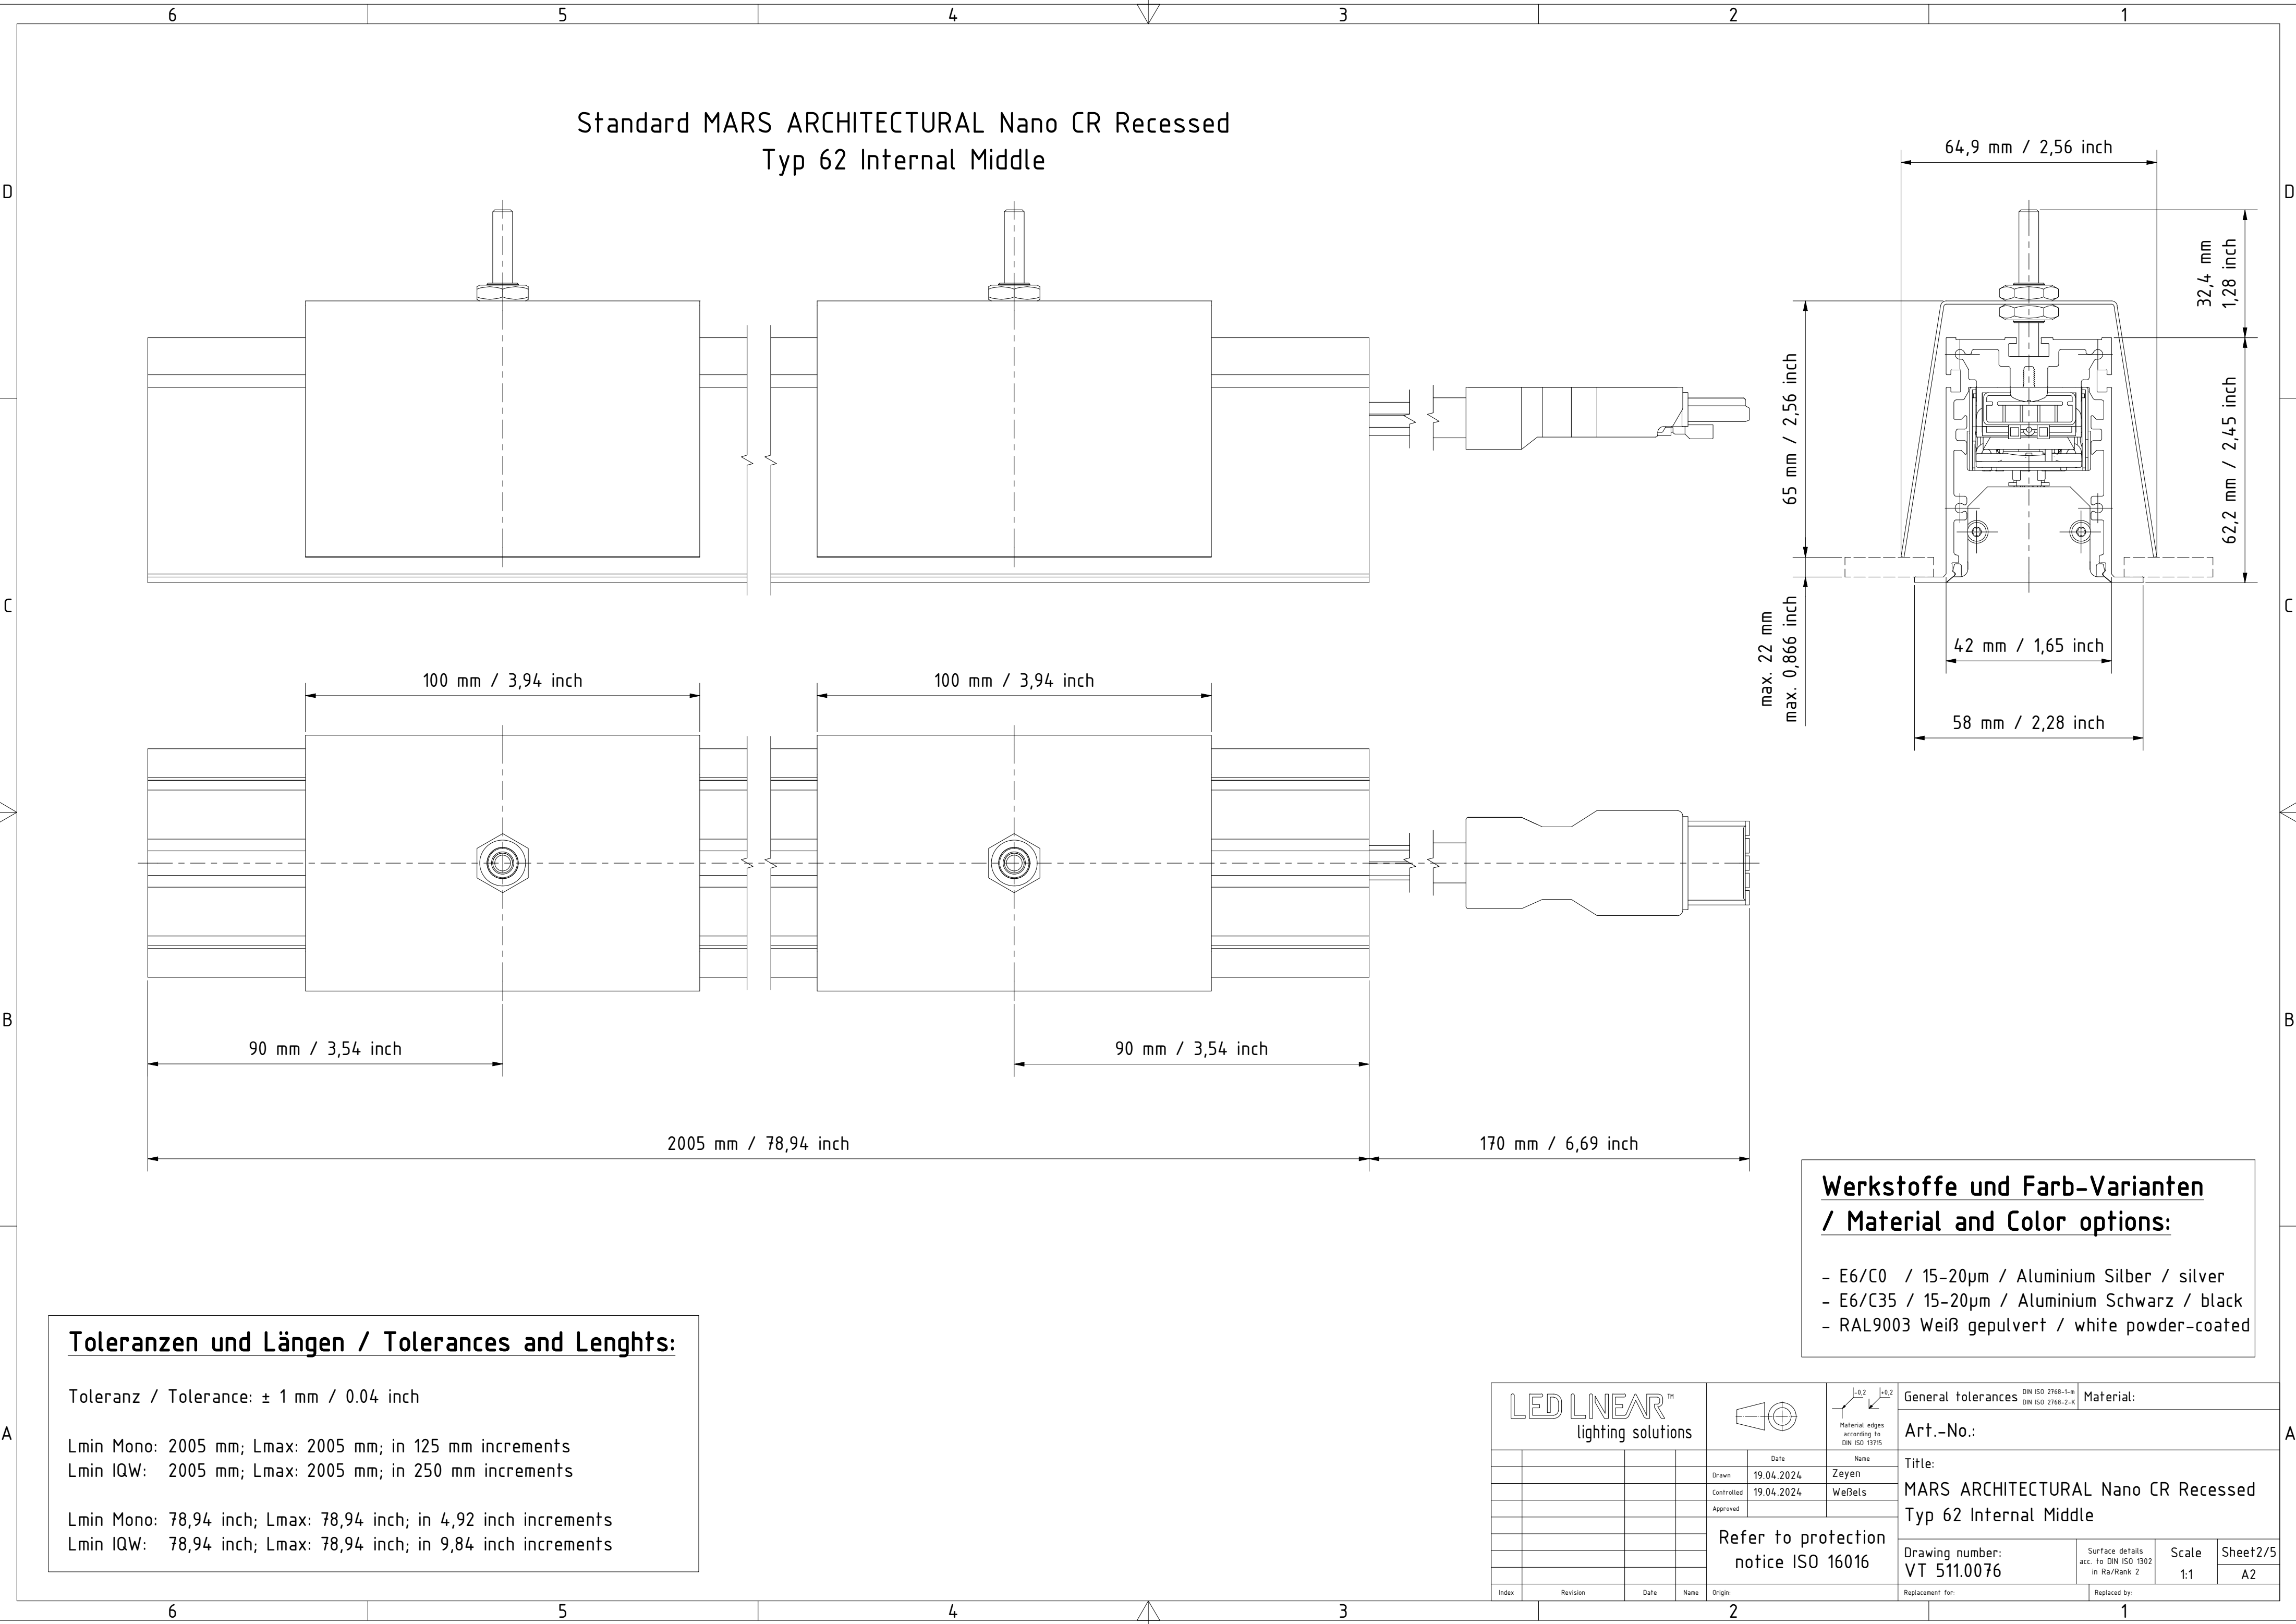

Standard MARS ARCHITECTURAL Nano CR Recessed
Typ 62 Internal Middle

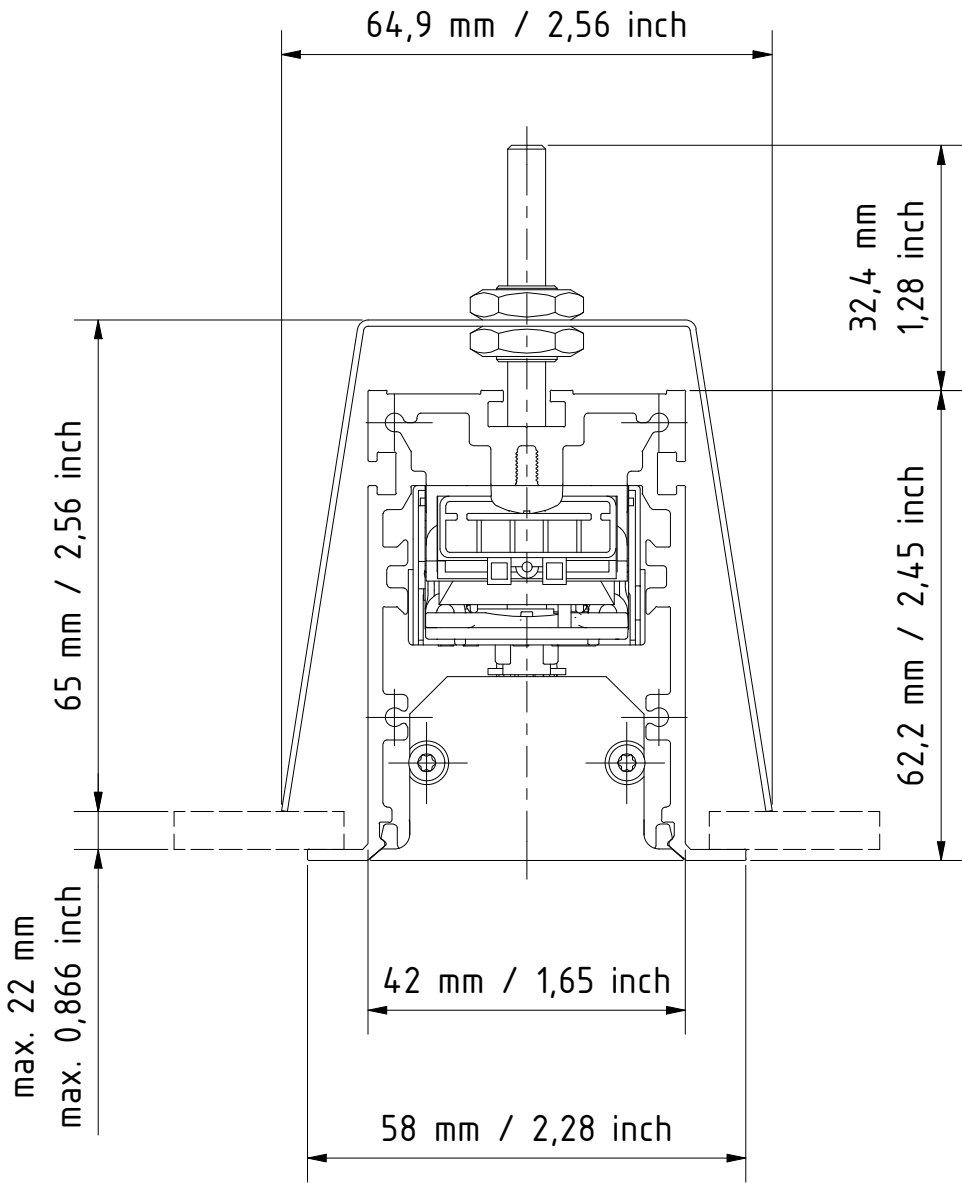

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$


Lmin Mono: 2005 mm; Lmax: 2005 mm; in 125 mm increments
Lmin IQW: 2005 mm; Lmax: 2005 mm; in 250 mm increments

Lmin Mono: 78,94 inch; Lmax: 78,94 inch; in 4,92 inch increments
Lmin IQW: 78,94 inch; Lmax: 78,94 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
					Date	Name		Title:				
				Drawn	19.04.2024	Zeyen		MARS ARCHITECTURAL Nano CR Recessed				
				Controlled	19.04.2024	Weßels		Typ 62 Internal Middle				
				Approved				Drawing number:				
								VT 511.0076		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale	Sheet2/5
					Refer to protection notice ISO 16016					1:1	A2	
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:			

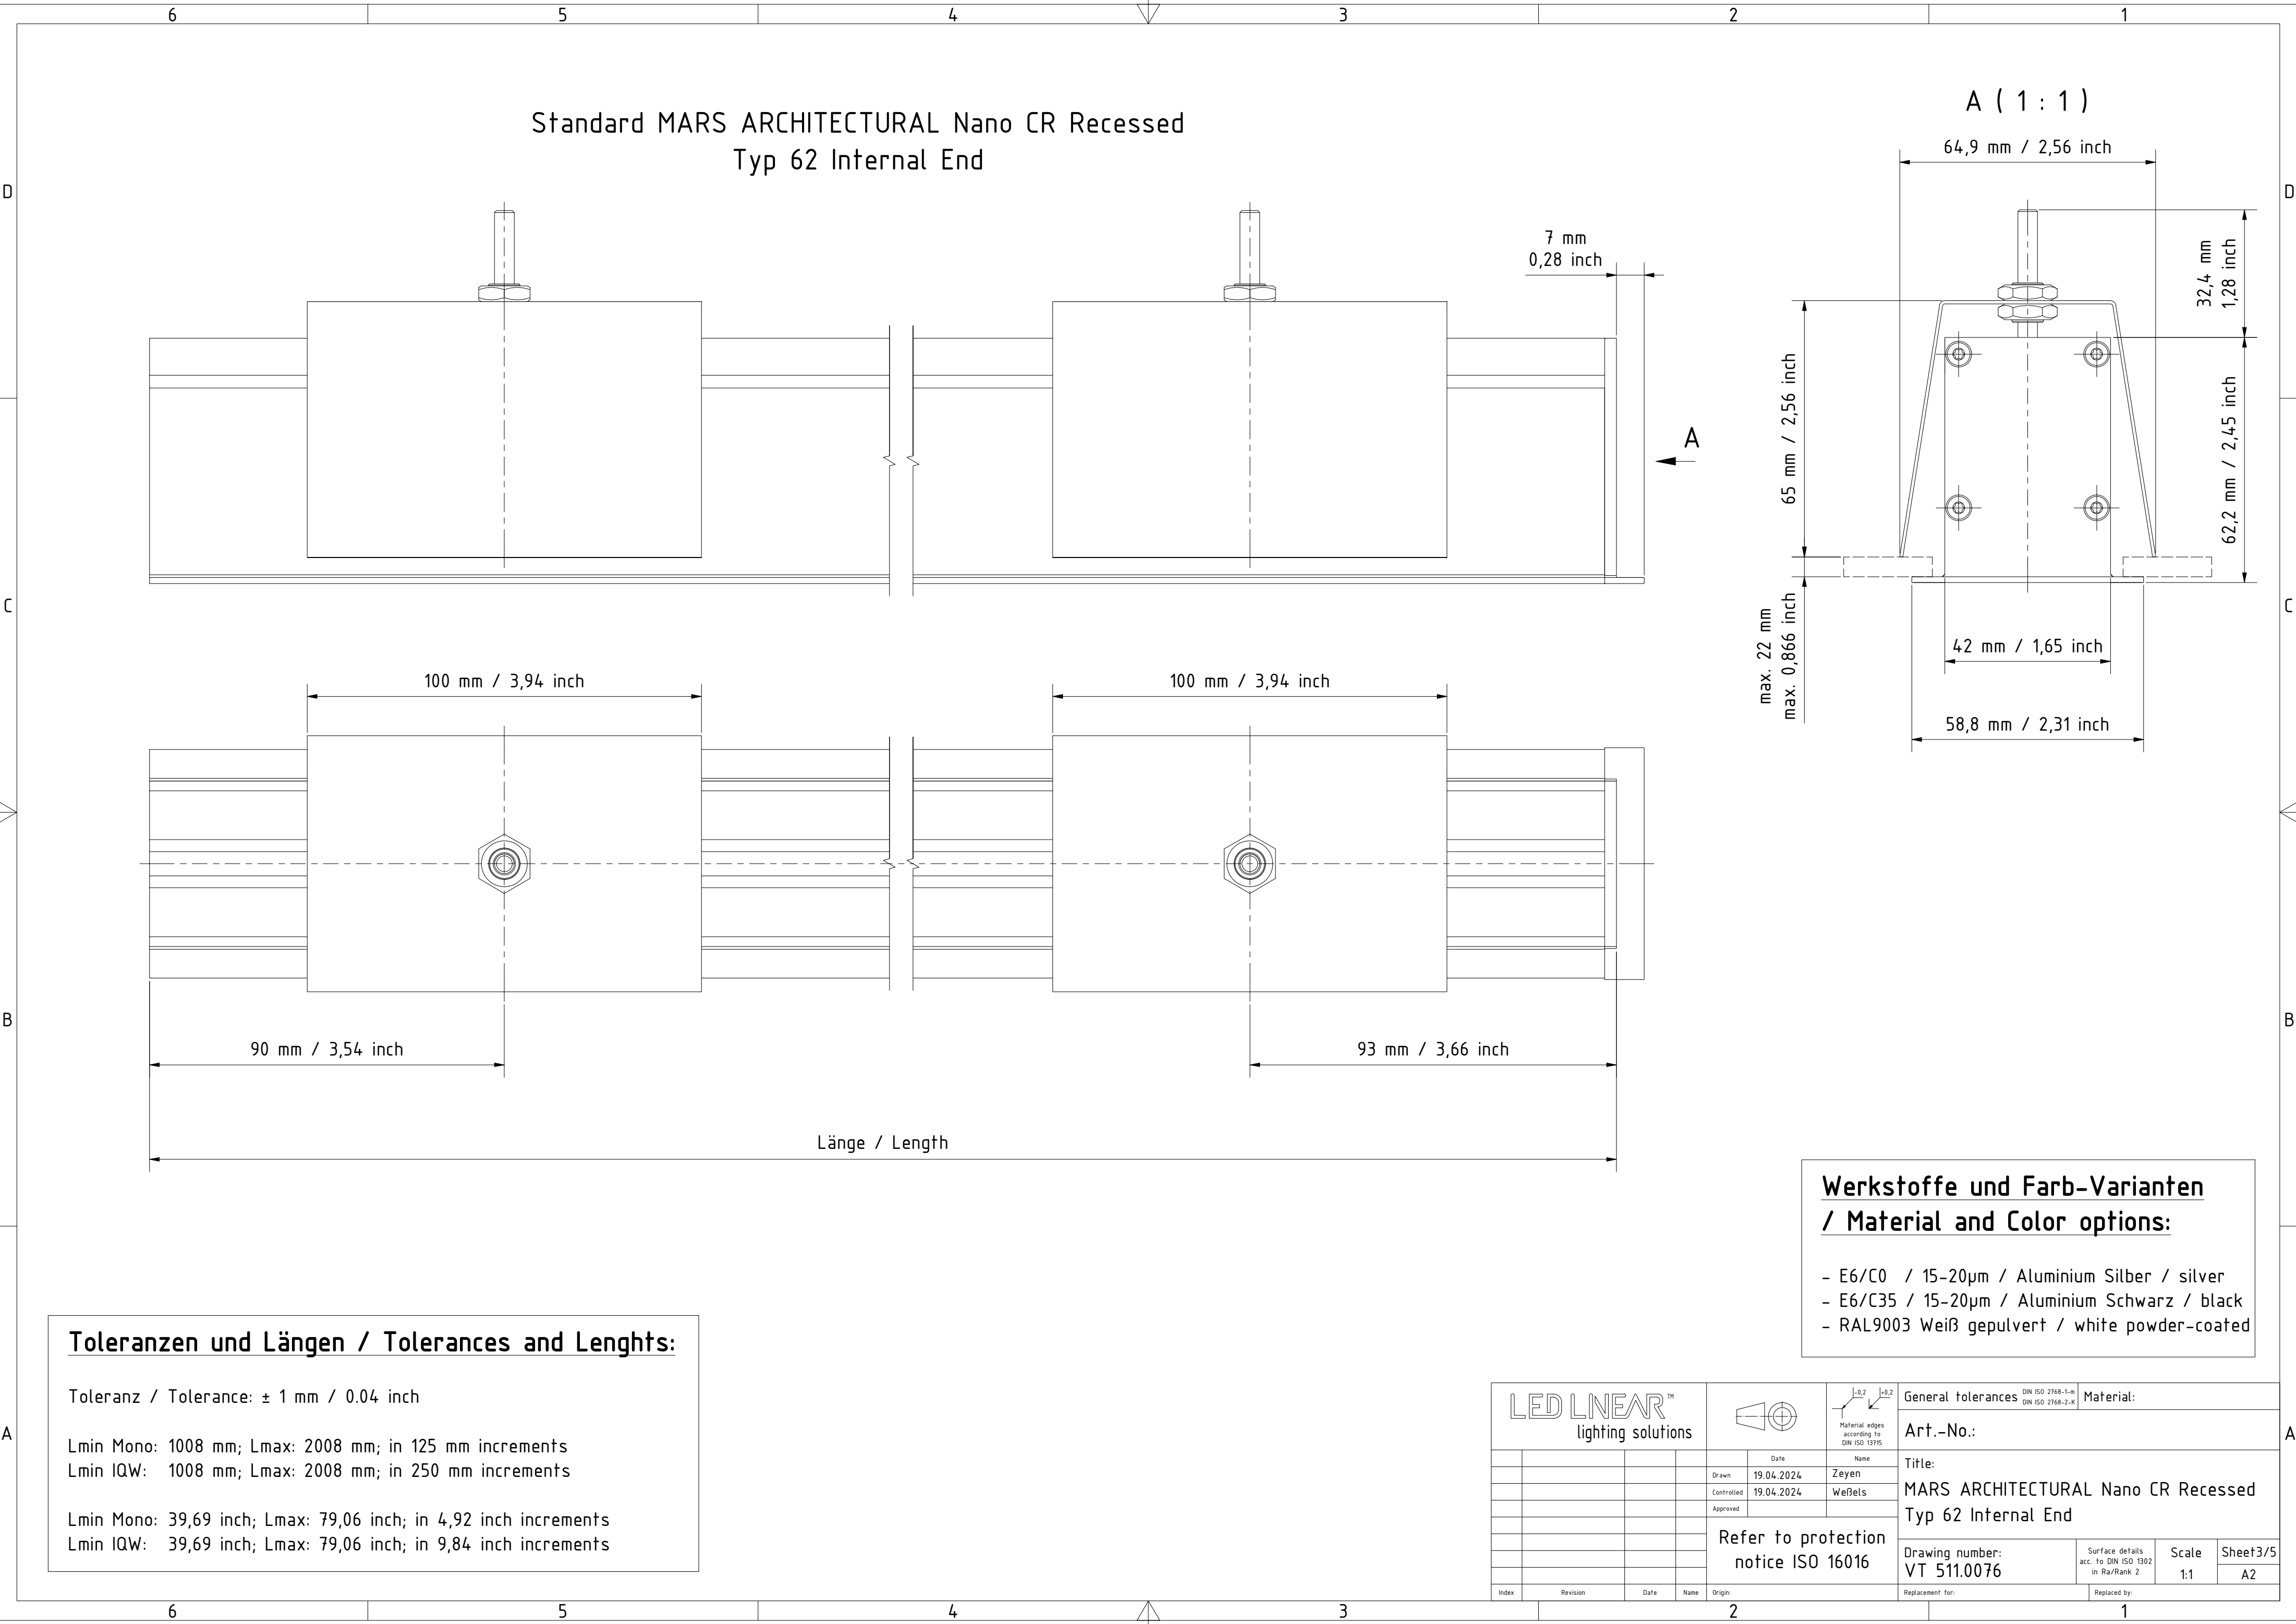

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 1008 mm; Lmax: 2008 mm; in 125 mm increments
Lmin IQW: 1008 mm; Lmax: 2008 mm; in 250 mm increments


Lmin Mono: 39,69 inch; Lmax: 79,06 inch; in 4,92 inch increments
Lmin IQW: 39,69 inch; Lmax: 79,06 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Drawn	Date 19.04.2024	Zeyen	Art.-No.:				
				Controlled	19.04.2024	Weßels	Title:				
				Approved			MARS ARCHITECTURAL Nano CR Recessed Typ 62 Internal End				
				Refer to protection notice ISO 16016			Drawing number: VT 511.0076		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/5 A2
Index	Revision	Date	Name	Origin:				Replacement for:		Replaced by:	

Standard MARS ARCHITECTURAL Nano CR Recessed
Typ 62 Internal Beginning with Sensor

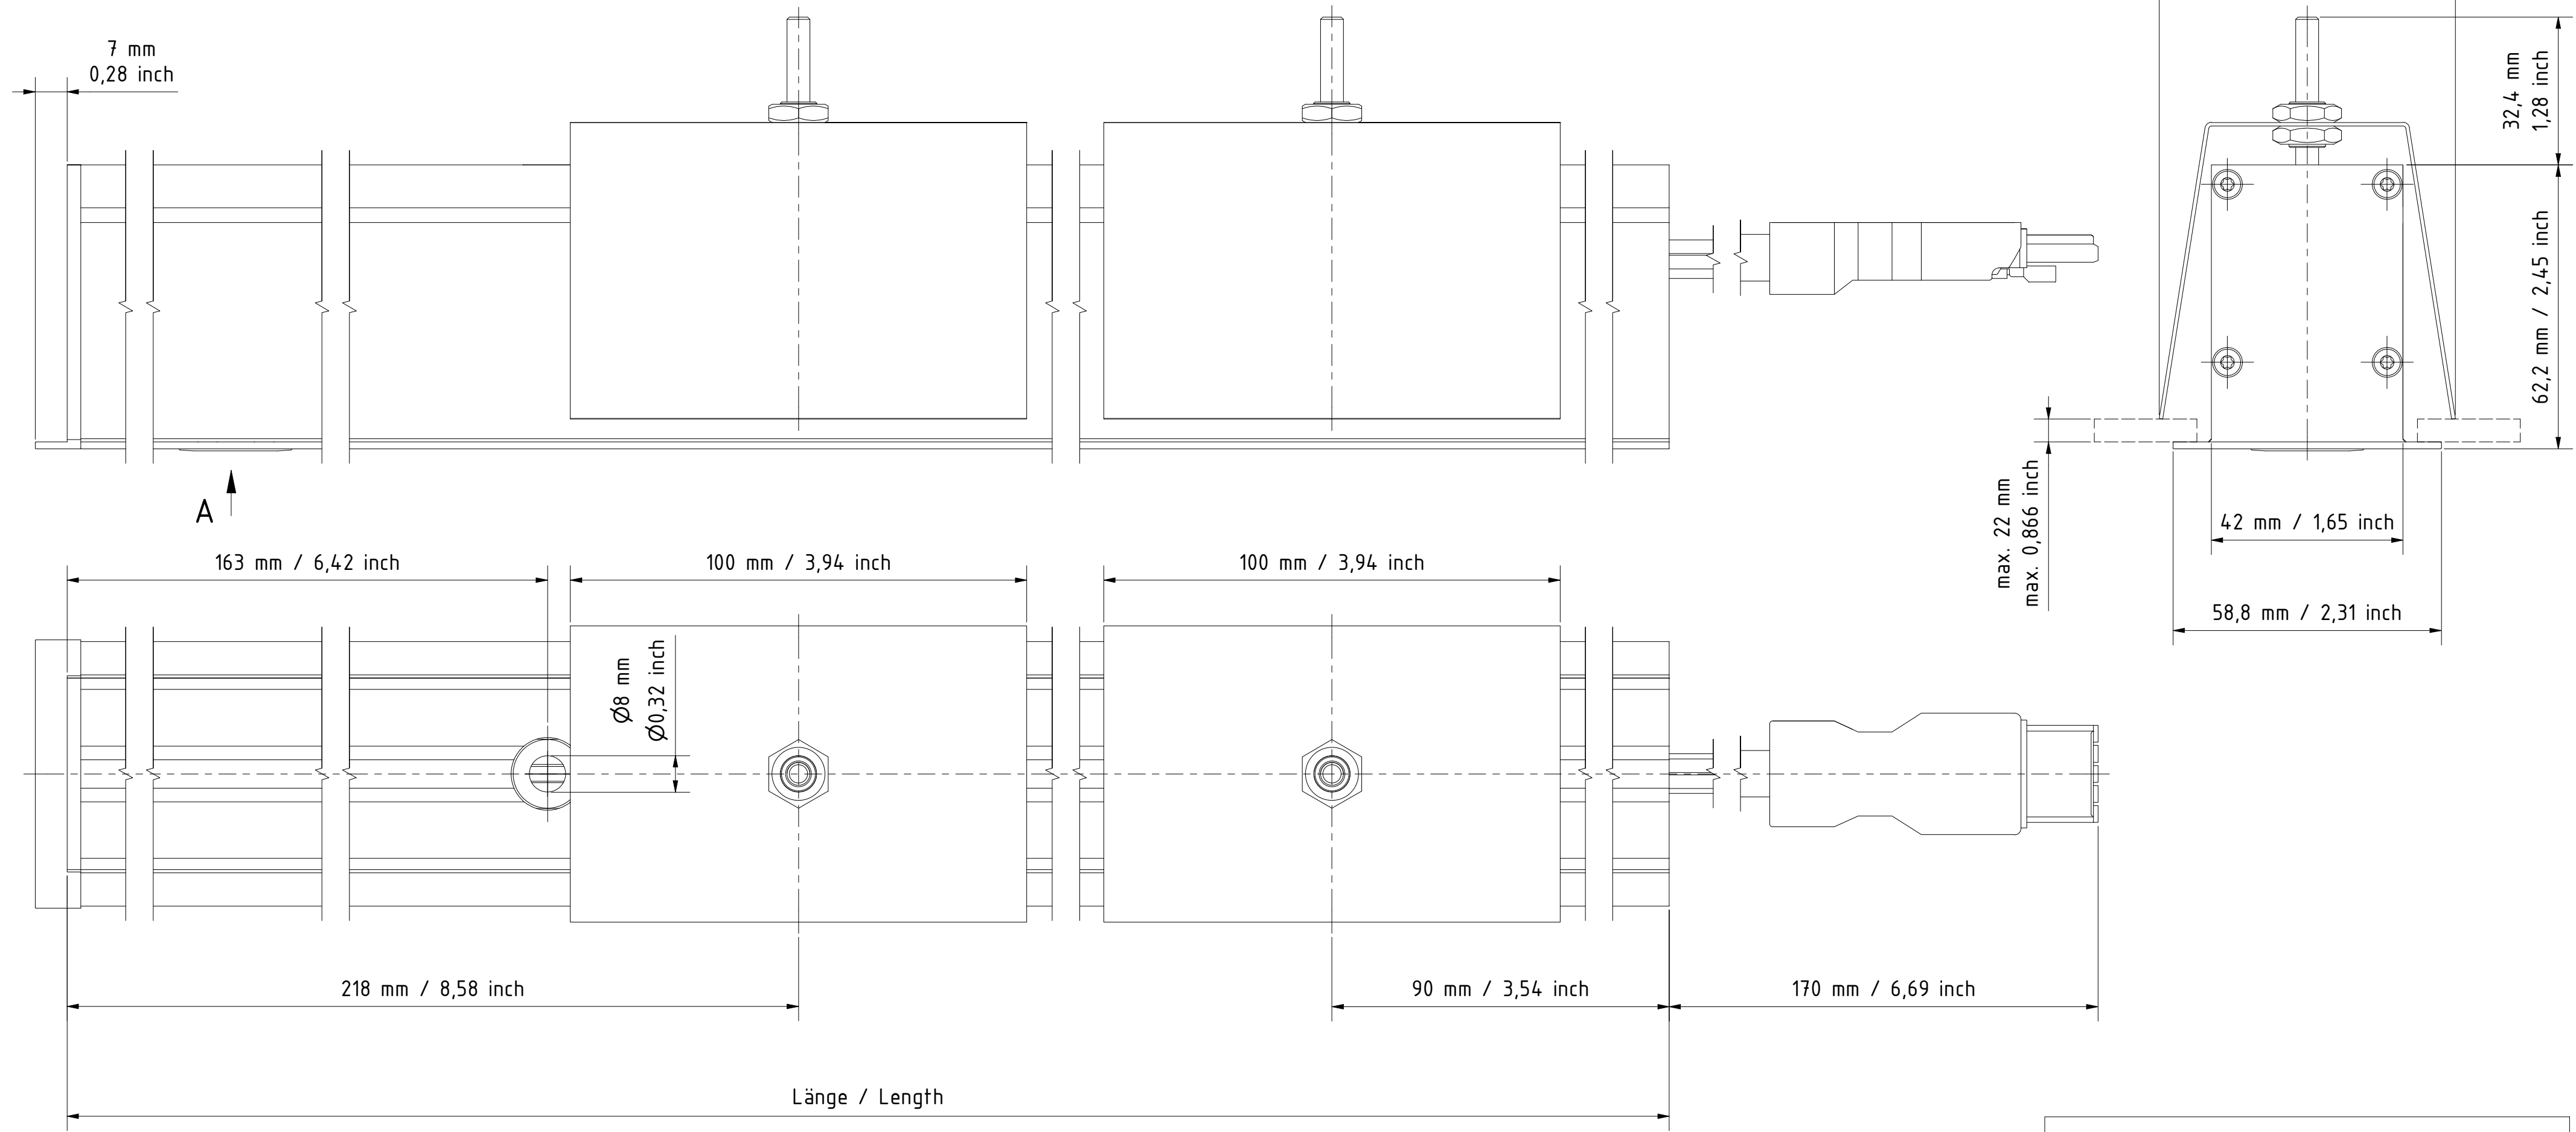


Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1133 mm; Lmax: 2133 mm; in 125 mm increments
Lmin IQW: 1133 mm; Lmax: 2133 mm; in 250 mm increments



Lmin Mono: 44,61 inch; Lmax: 83,98 inch; in 4,92 inch increments
Lmin IQW: 44,61 inch; Lmax: 83,98 inch; in 9,84 inch increments

A (1 : 1,5)



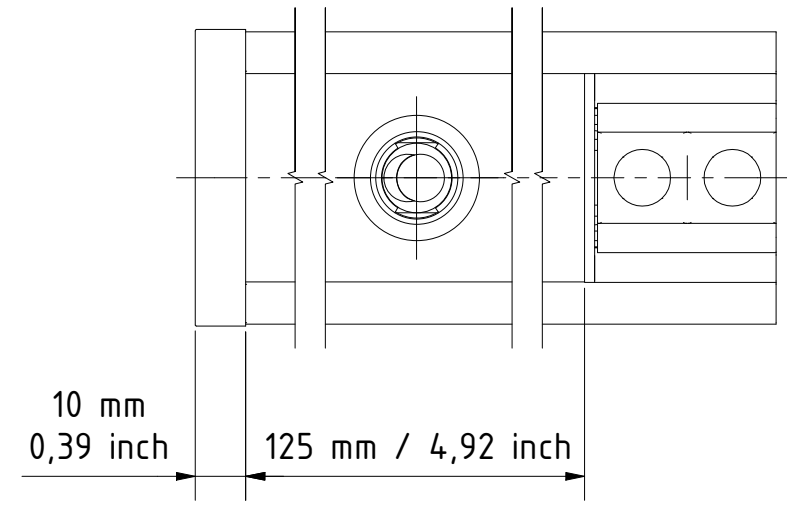


**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
						Material edges according to DIN ISO 13115		Art.-No.:			
				Date		Name		Title:			
				Drawn		19.04.2024 Zeyen		MARS ARCHITECTURAL Nano CR Recessed			
				Controlled		19.04.2024 Weßels		Typ 62 Internal Beginning with Sensor			
				Approved				Drawing number: VT 511.0076			
				Refer to protection notice ISO 16016				Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	
										Sheet4/5 A2	
Index		Revision		Date		Name		Origin:		Replacement for:	
										Replaced by:	

Standard MARS ARCHITECTURAL Nano CR Recessed
Typ 62 Internal End with Sensor

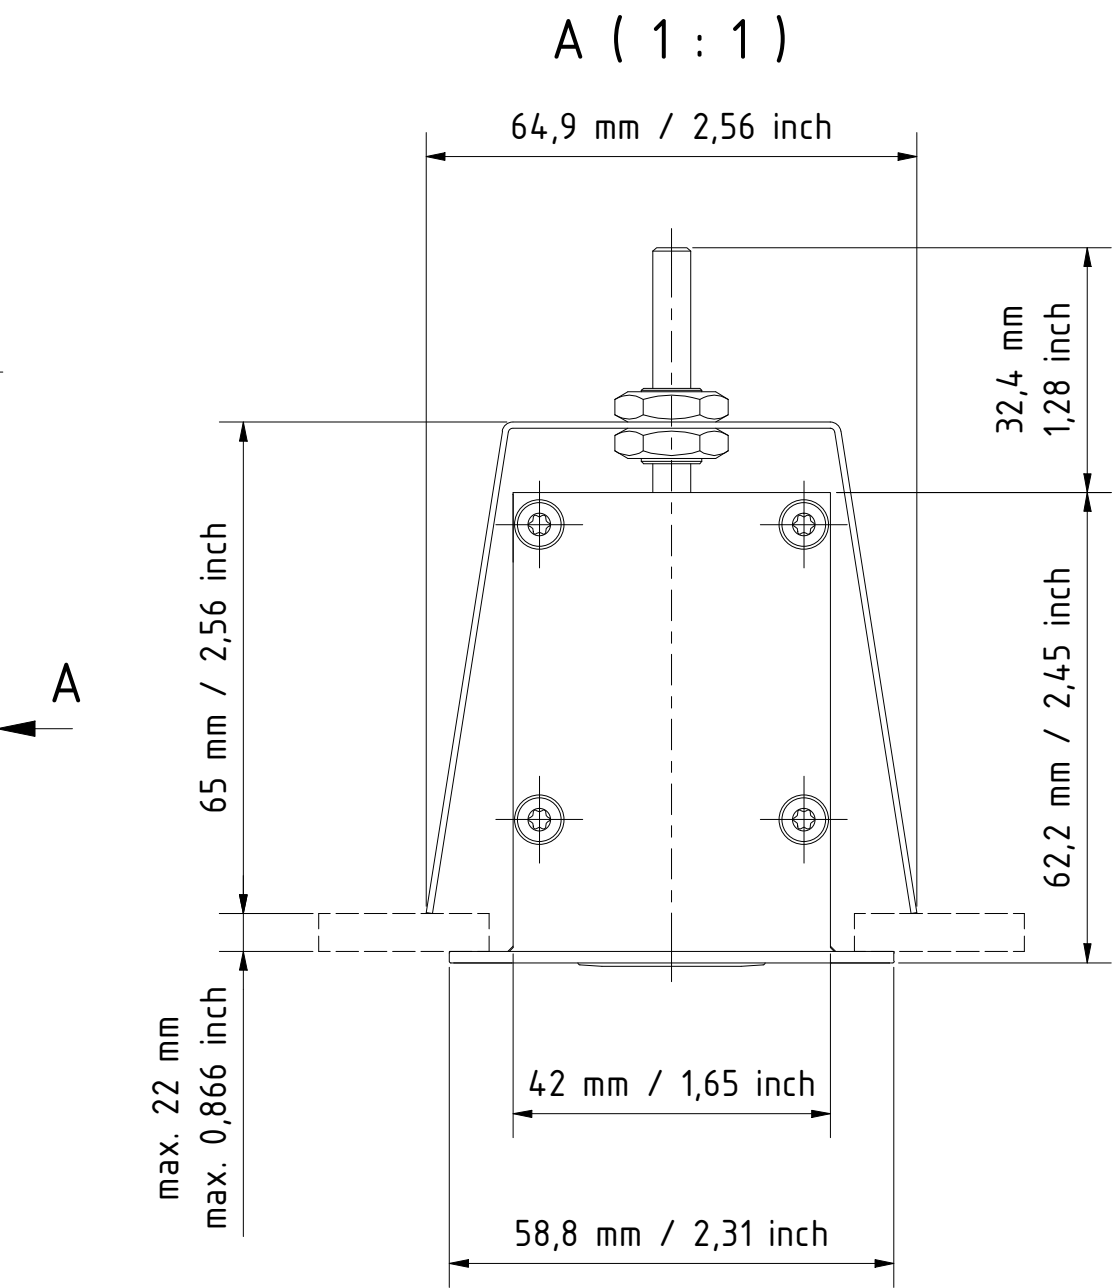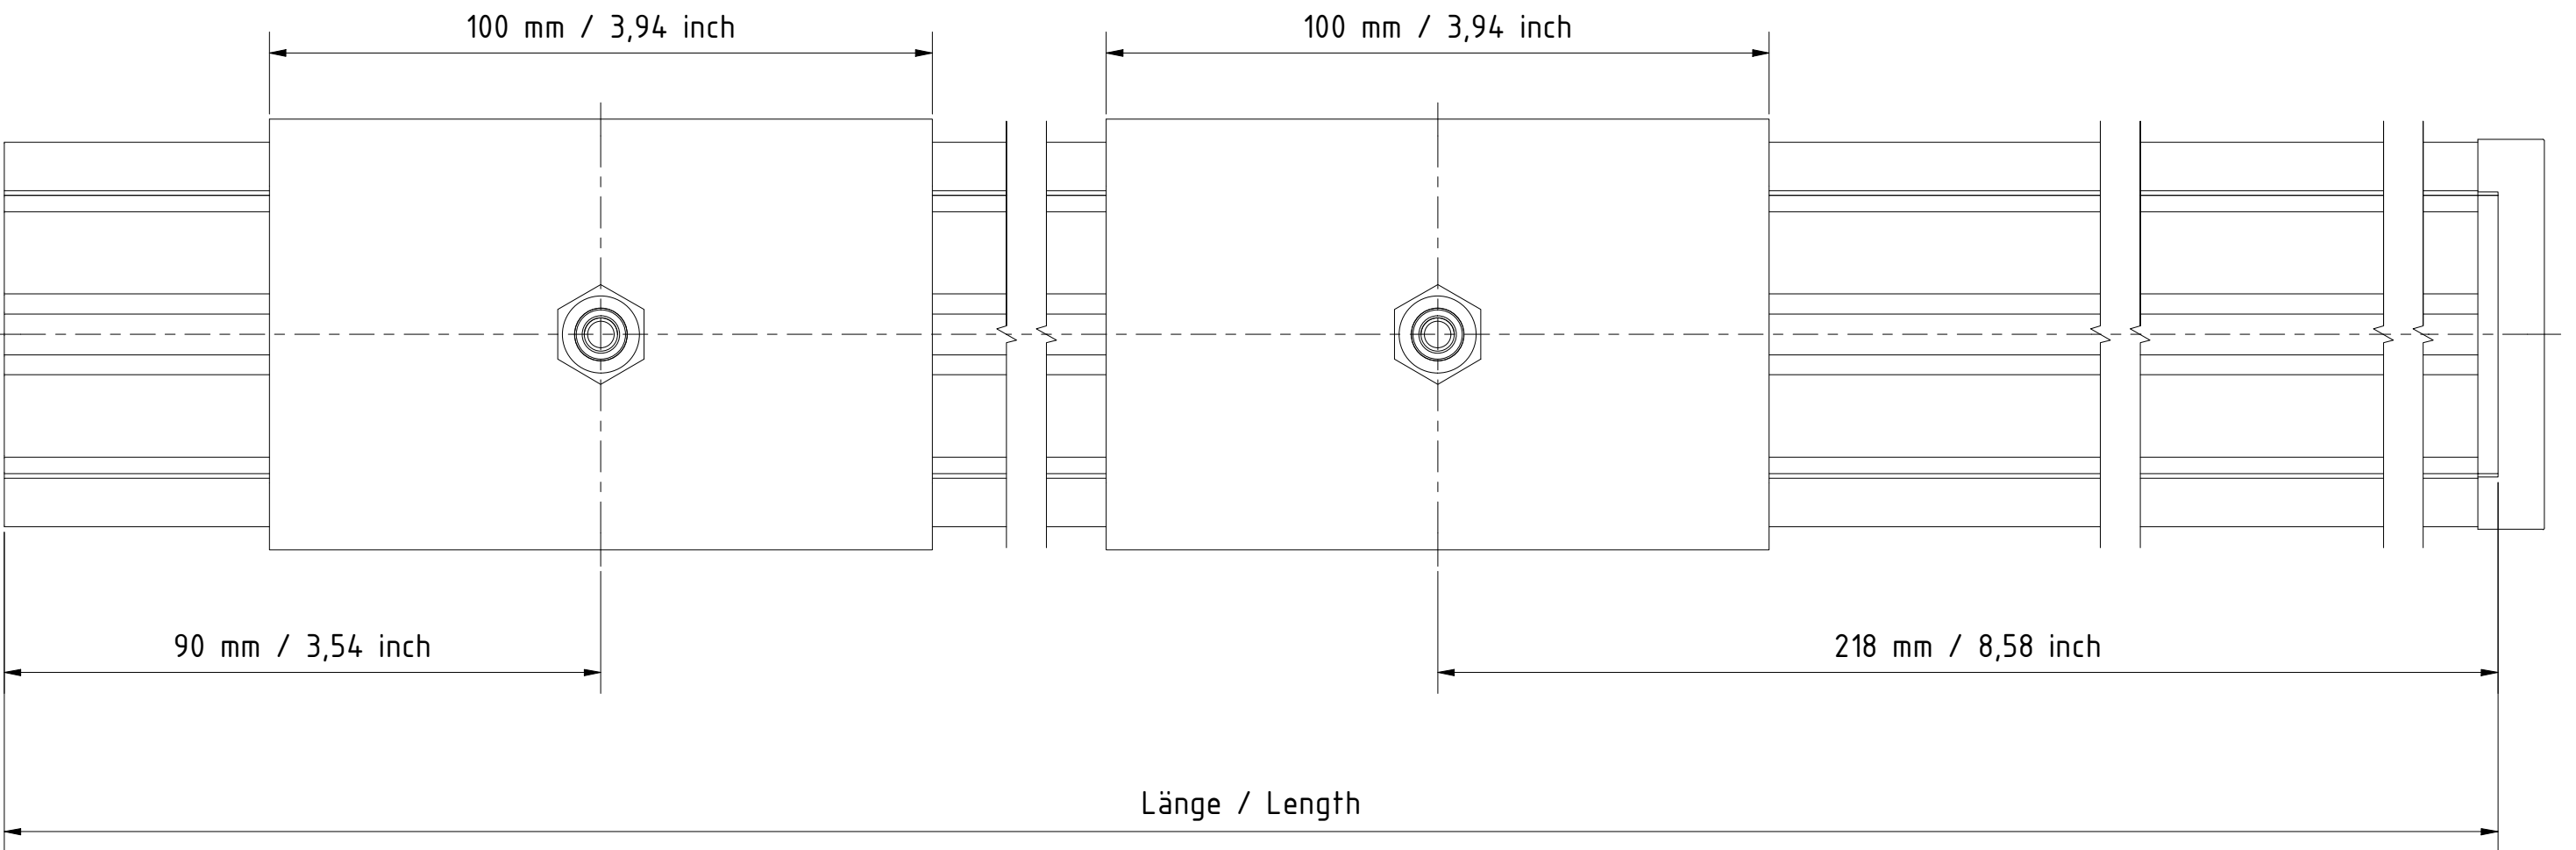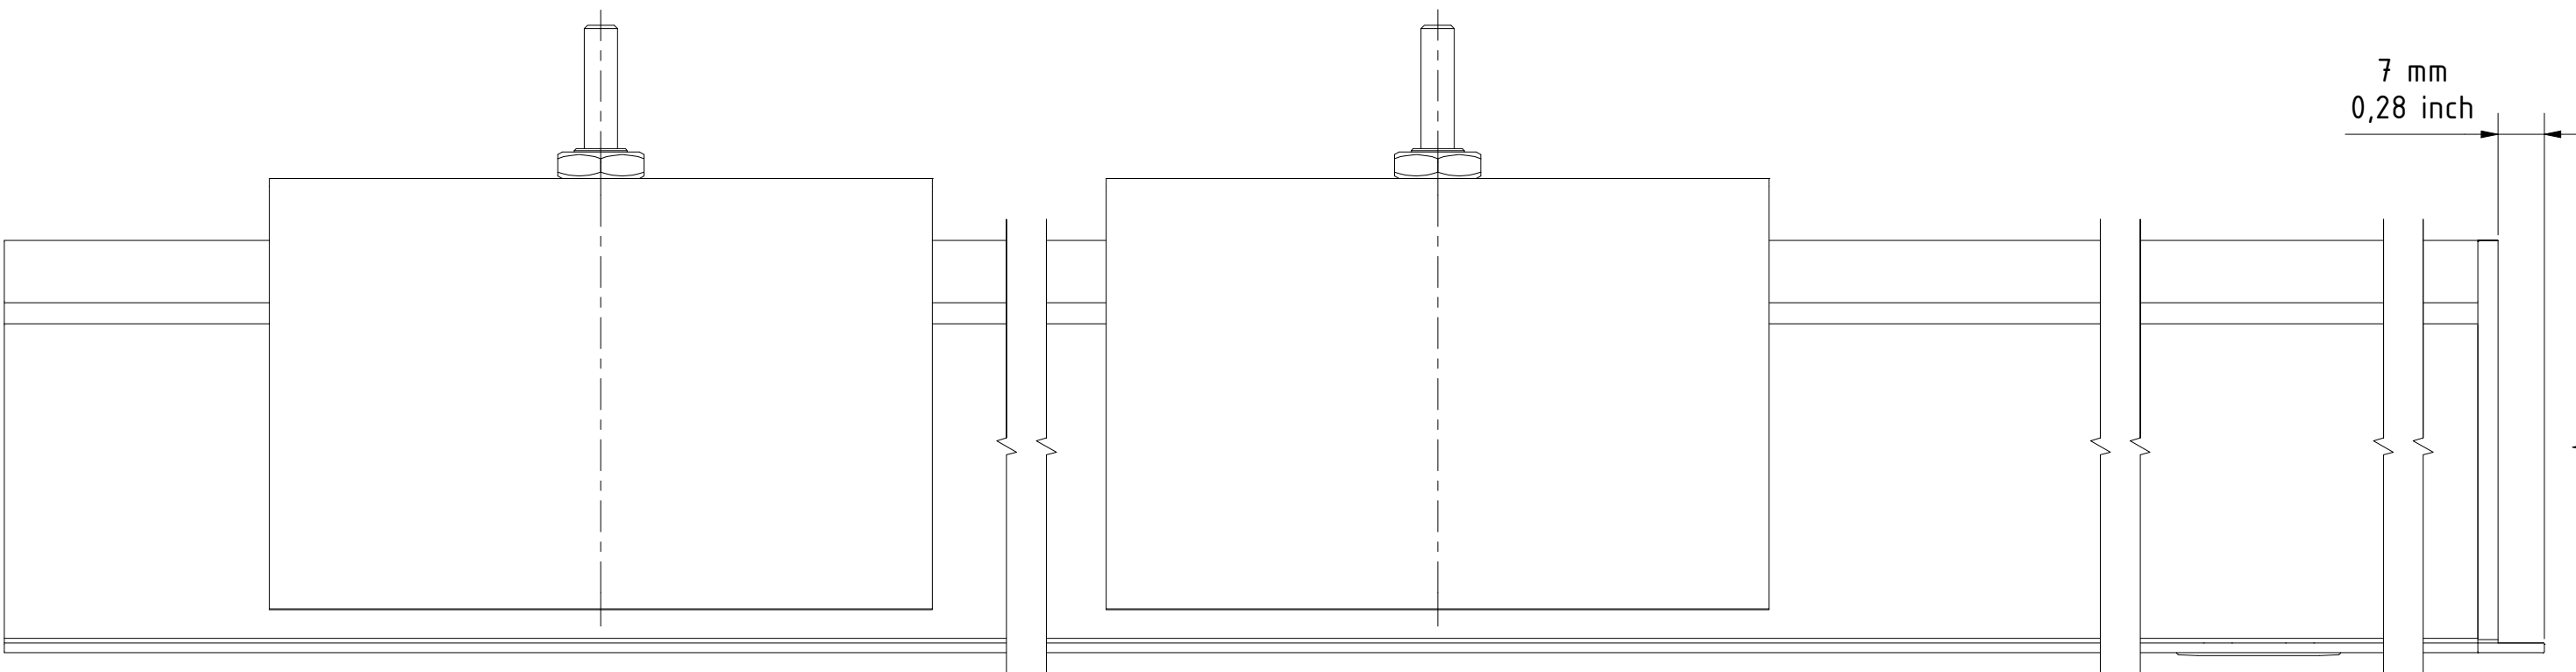

B (1 : 1,5)

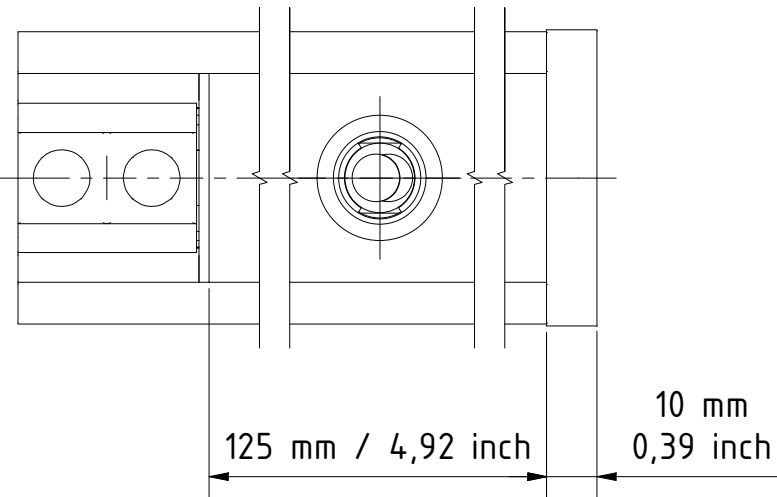

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1133 mm; Lmax: 2133 mm; in 125 mm increments
Lmin IQW: 1133 mm; Lmax: 2133 mm; in 250 mm increments

Lmin Mono: 44,61 inch; Lmax: 83,98 inch; in 4,92 inch increments
Lmin IQW: 44,61 inch; Lmax: 83,98 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	Date 19.04.2024	Name Zeyen		Art.-No.:				
				Controlled	19.04.2024	Weßels		Title:				
				Approved				MARS ARCHITECTURAL Nano CR Recessed Typ 62 Internal End with Sensor				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0076				
								Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet5/5 A2	
Index	Revision	Date	Name	Origin:					Replacement for:		Replaced by:	