


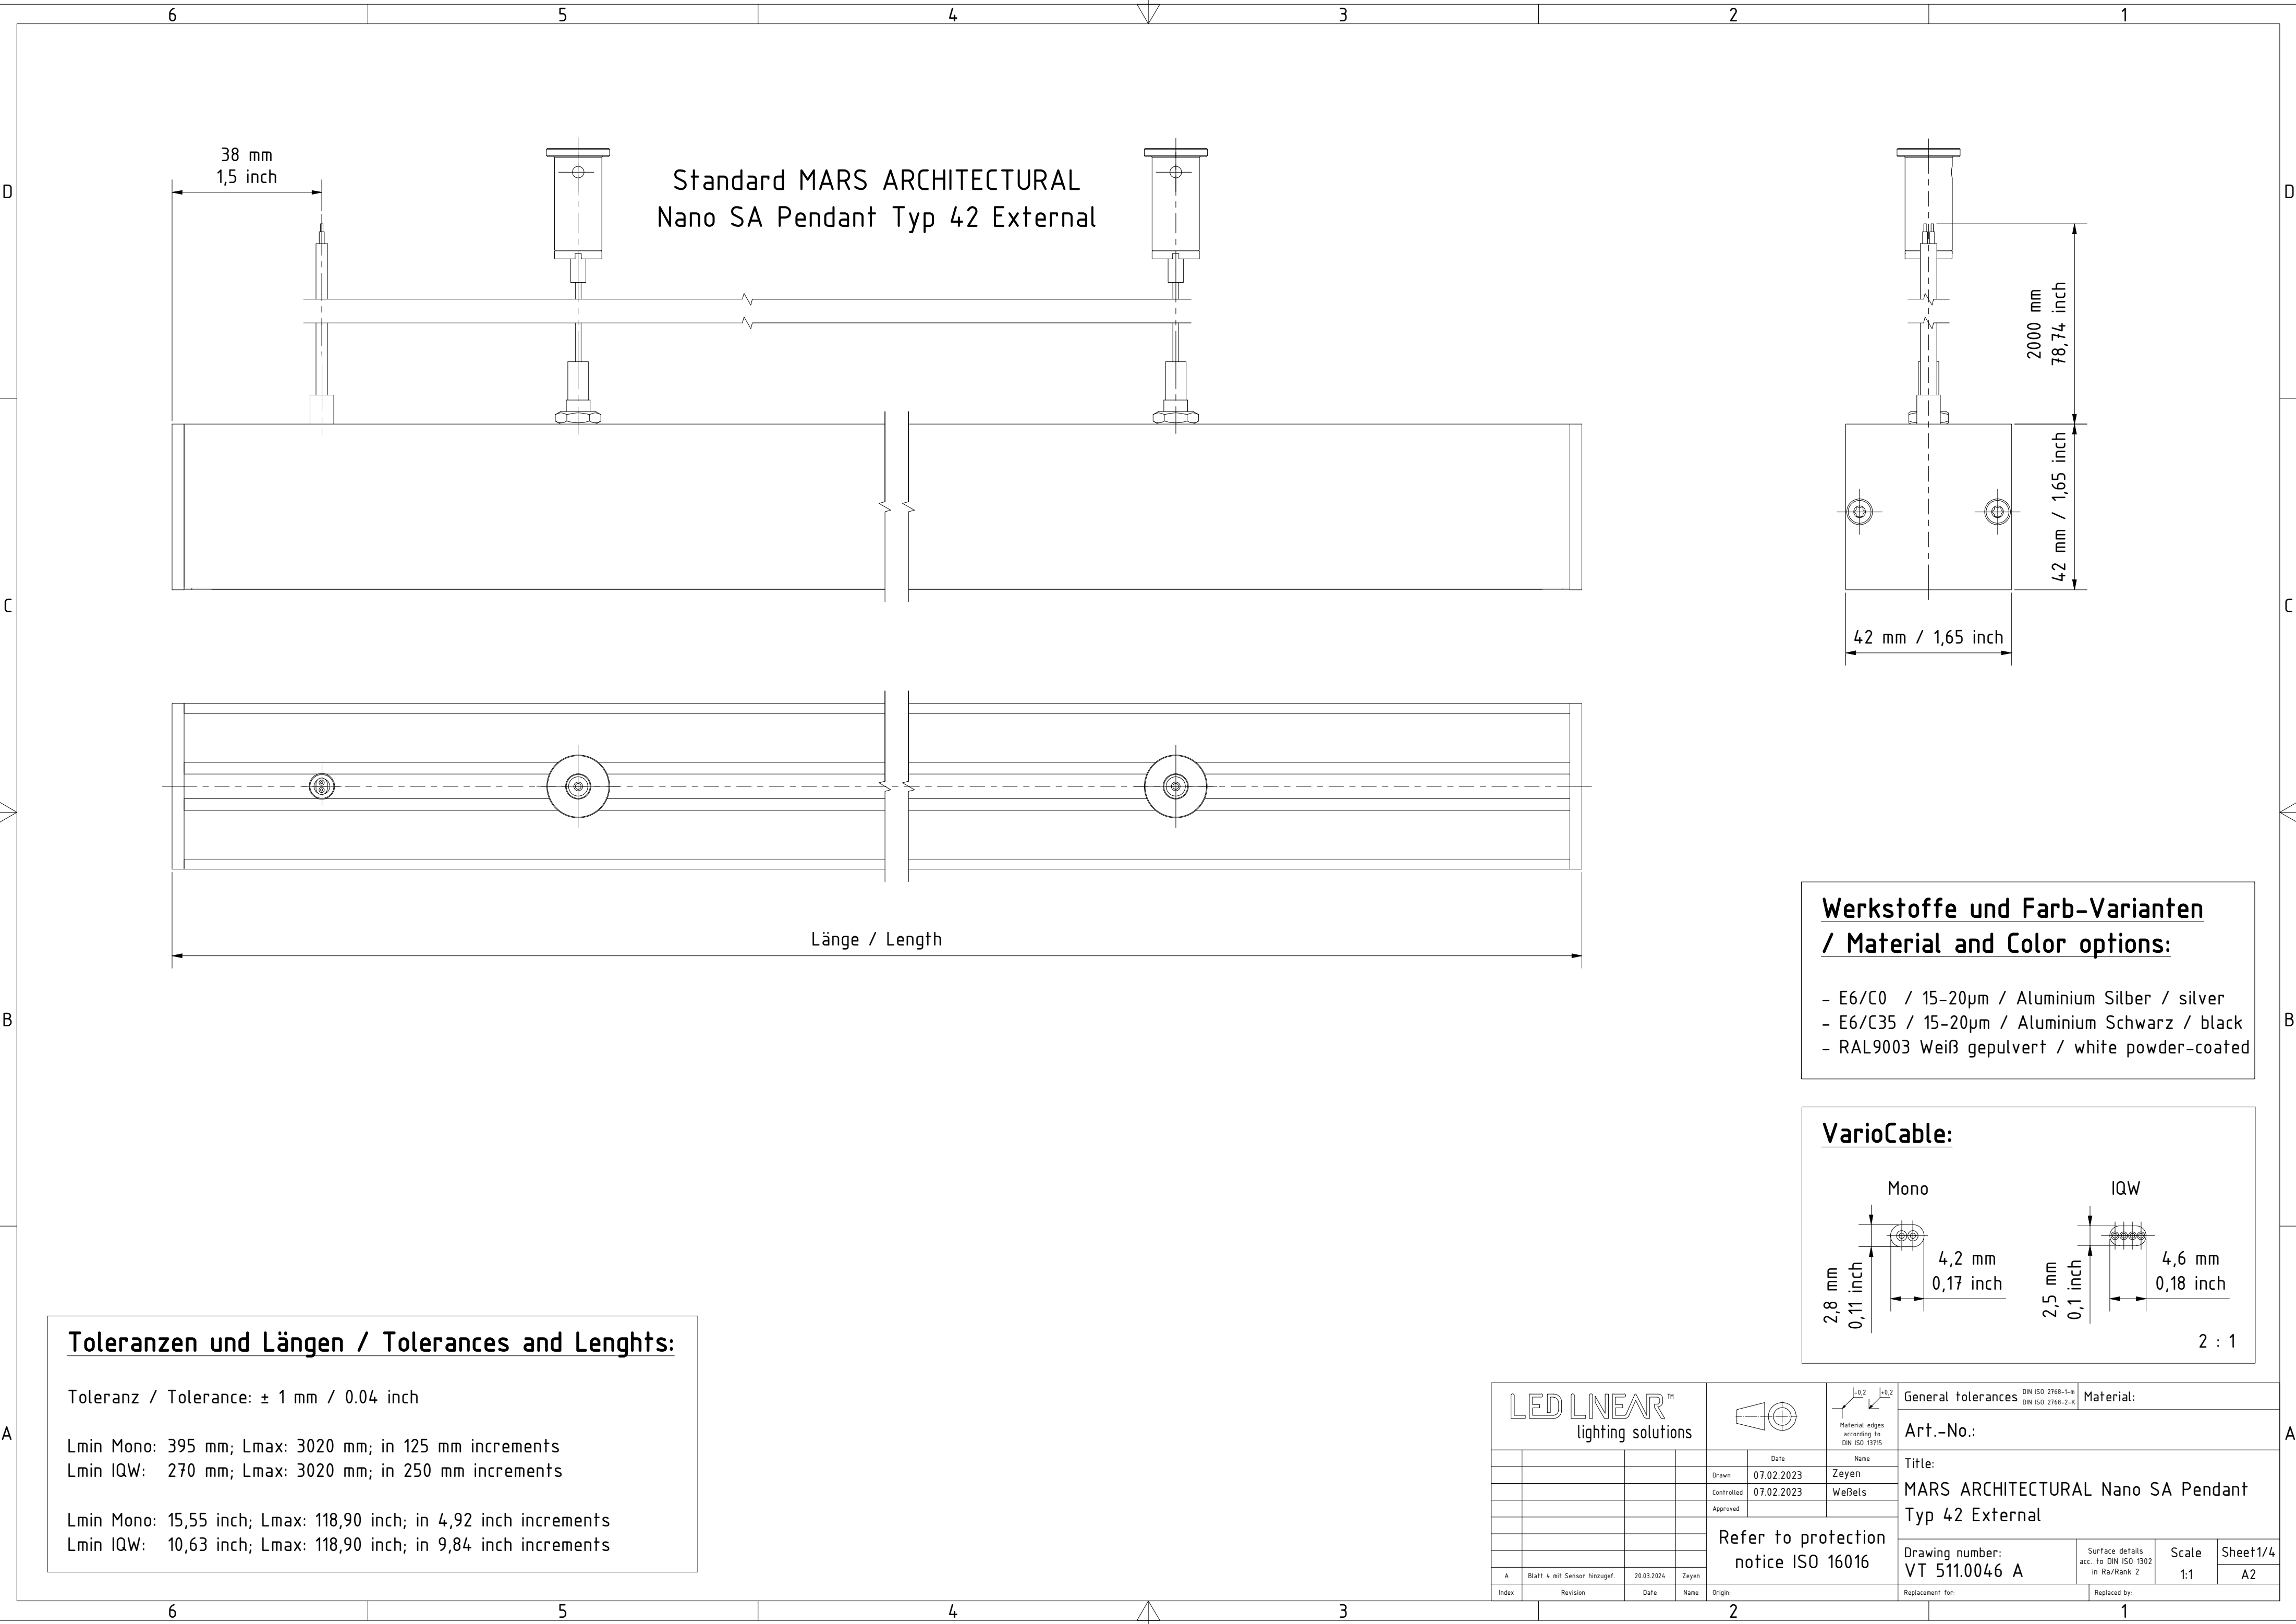

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 395 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 270 mm; Lmax: 3020 mm; in 250 mm increments



Lmin Mono: 15,55 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 10,63 inch; Lmax: 118,90 inch; in 9,84 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

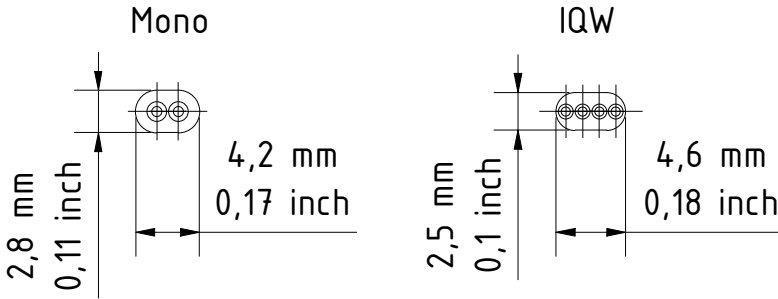

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:			
					Date	Name		Art.-No.:					
				Drawn	07.02.2023	Zeyen		Title:					
				Controlled	07.02.2023	Weßels		MARS ARCHITECTURAL Nano SA Pendant Typ 42 External					
				Approved				Drawing number: VT 511.0046 A					
				Refer to protection notice ISO 16016				Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet1/4 A2		
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen	Replacement for:							Replaced by:	
Index	Revision		Date	Name	Origin:								

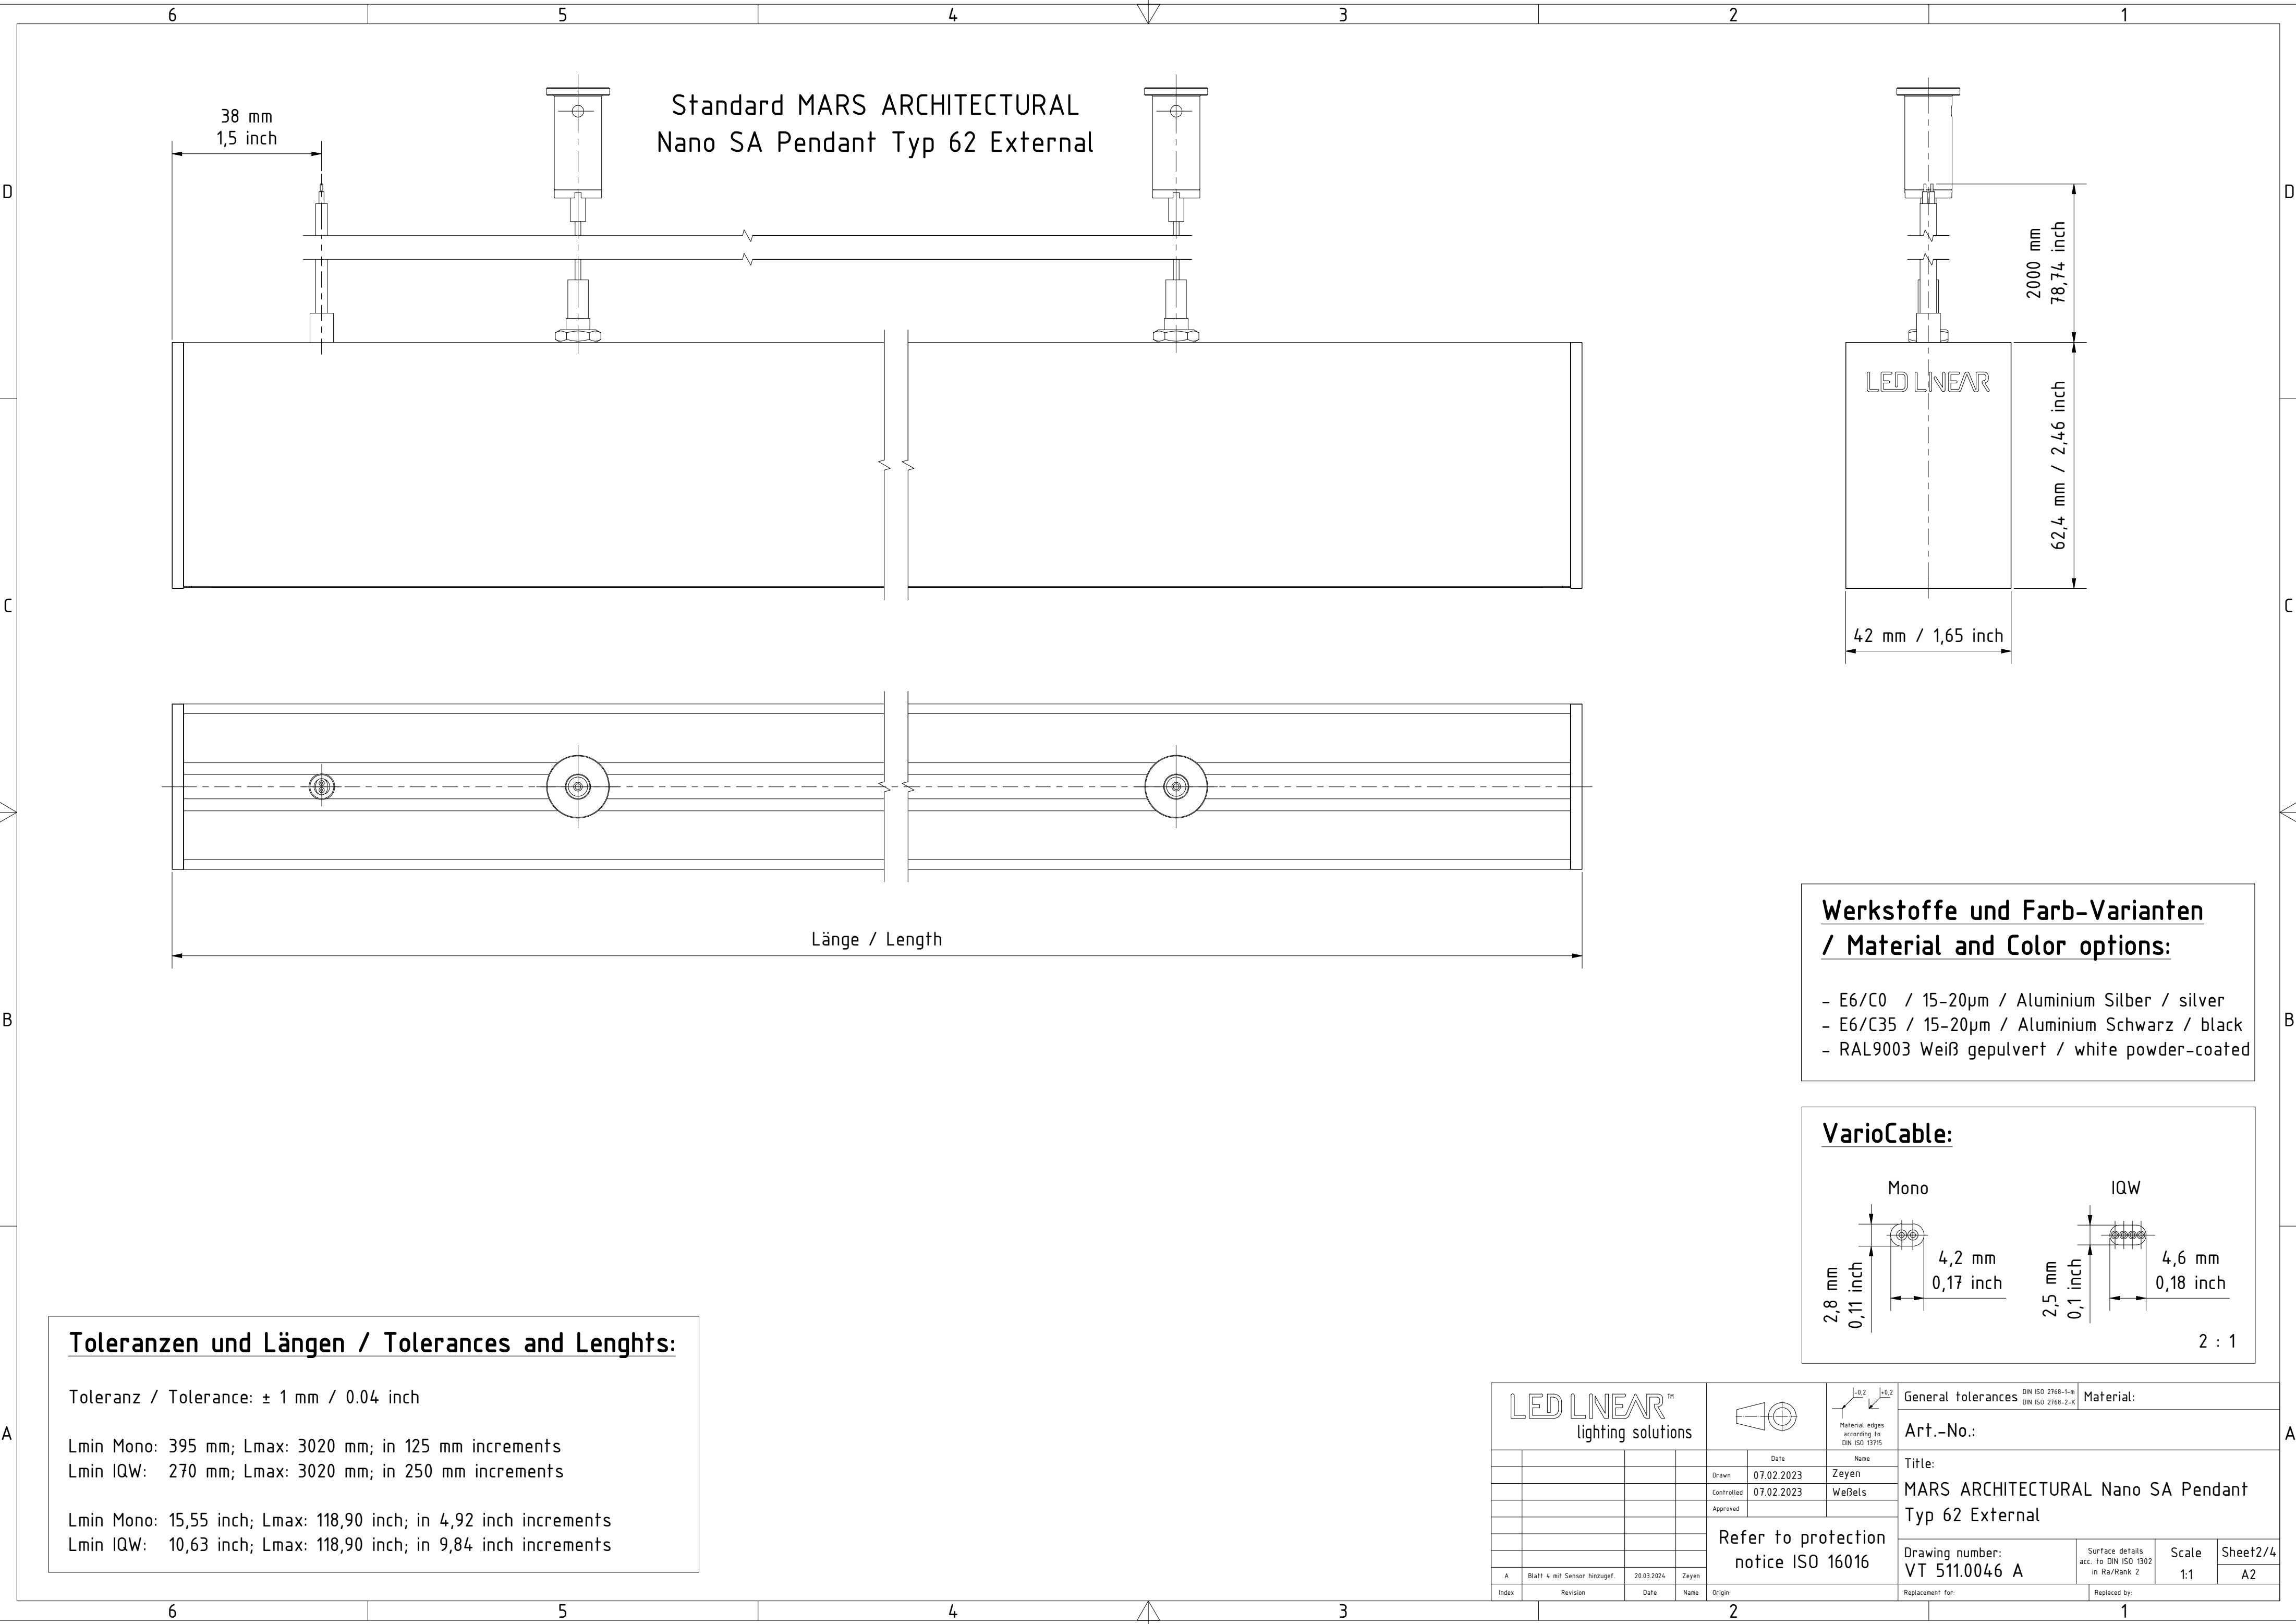

Standard MARS ARCHITECTURAL
Nano SA Pendant Typ 62 External


LED LINEAR

Länge / Length

Werkstoffe und Farb-Varianten
/ Material and Color options:

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:


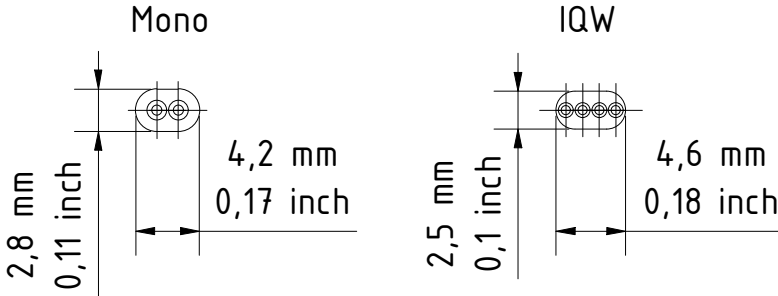



Toleranzen und Längen / Tolerances and Lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 395 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 270 mm; Lmax: 3020 mm; in 250 mm increments

Lmin Mono: 15,55 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 10,63 inch; Lmax: 118,90 inch; in 9,84 inch increments

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	07.02.2023	Zeyen		Art.-No.:				
				Controlled	07.02.2023	Weßels		Title:				
				Approved				MARS ARCHITECTURAL Nano SA Pendant Typ 62 External				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0046 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet2/4 A2
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen					Replacement for:		Replaced by:	
Index	Revision	Date	Name	Origin:								

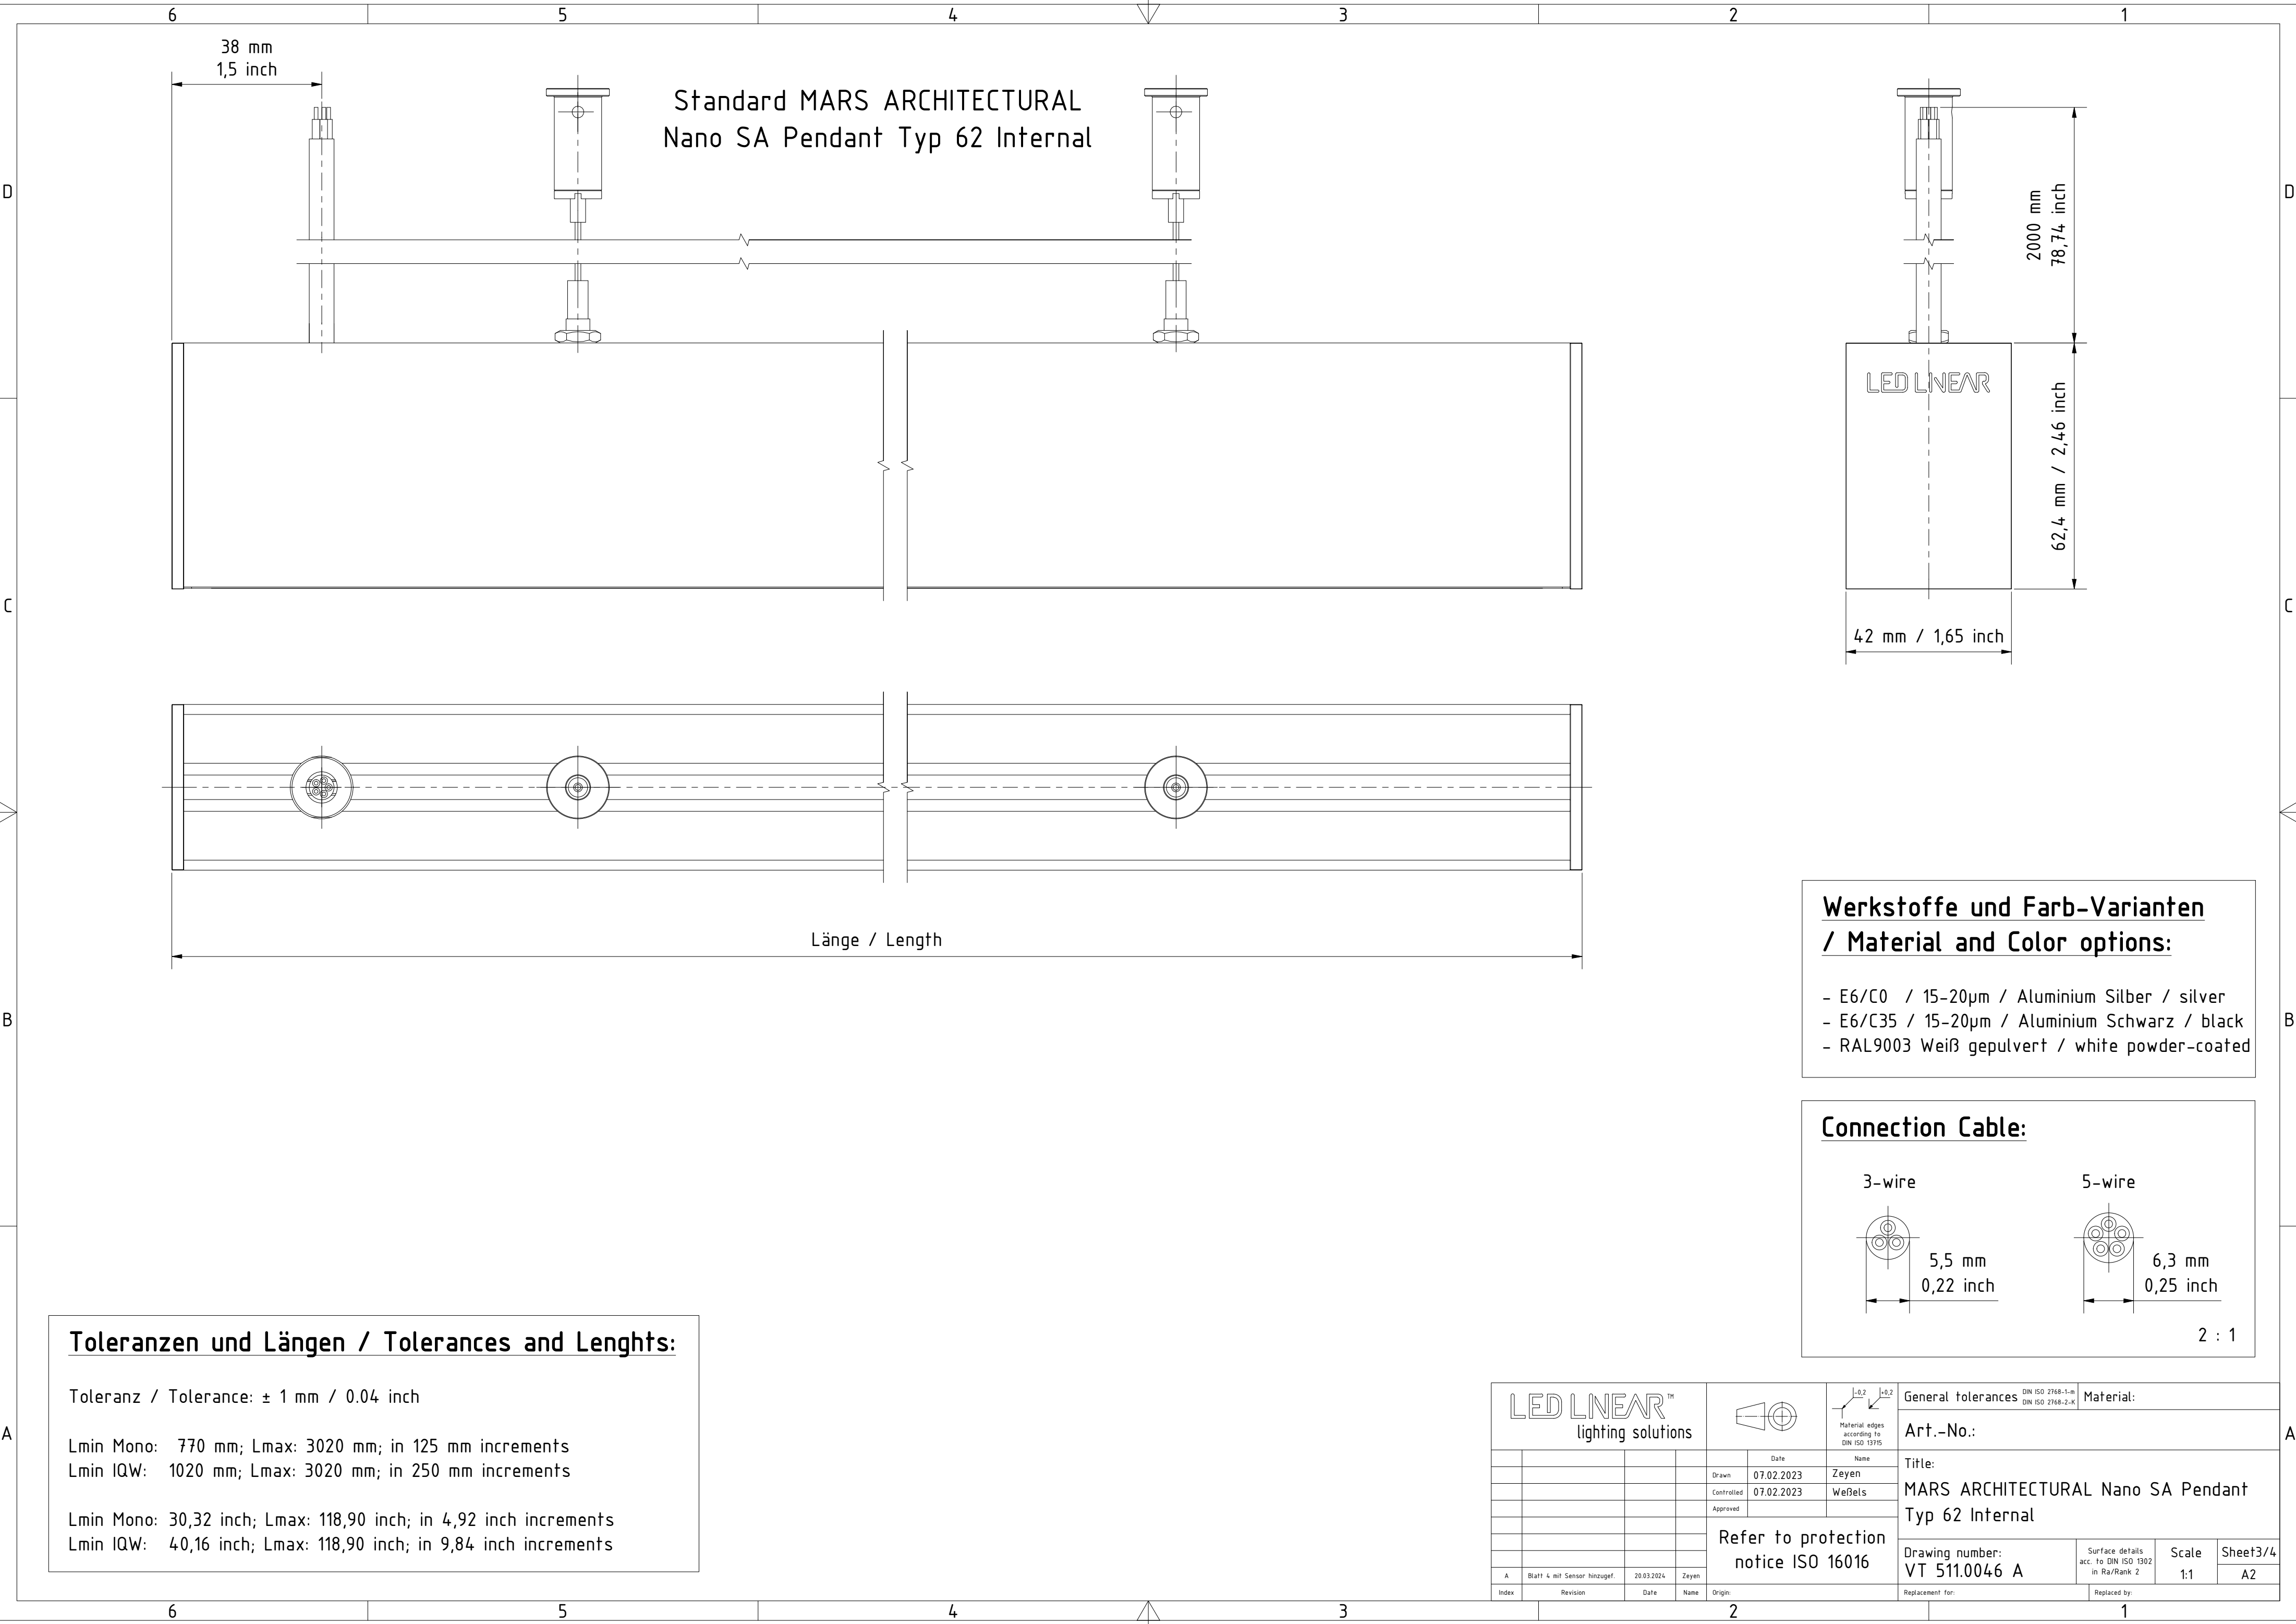

Toleranzen und Längen / Tolerances and Lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 770 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 1020 mm; Lmax: 3020 mm; in 250 mm increments

Lmin Mono: 30,32 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 40,16 inch; Lmax: 118,90 inch; in 9,84 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:

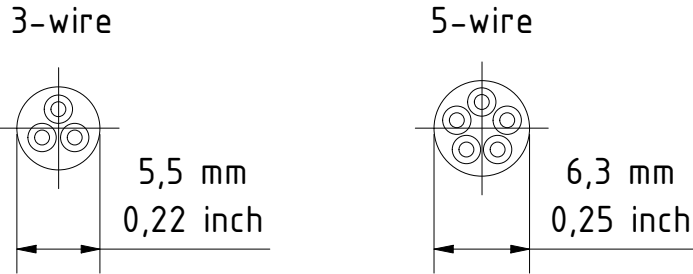

2 : 1

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
				Date		Name		Title:				
				Drawn	07.02.2023	Zeyen		MARS ARCHITECTURAL Nano SA Pendant				
				Controlled	07.02.2023	Weßels		Typ 62 Internal				
				Approved				Drawing number:				
				Refer to protection notice ISO 16016				VT 511.0046 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/4
A	Blatt 4 mit Sensor hinzugef.	20.03.2024	Zeyen									
Index	Revision	Date	Name	Origin:					Replacement for:		Replaced by:	

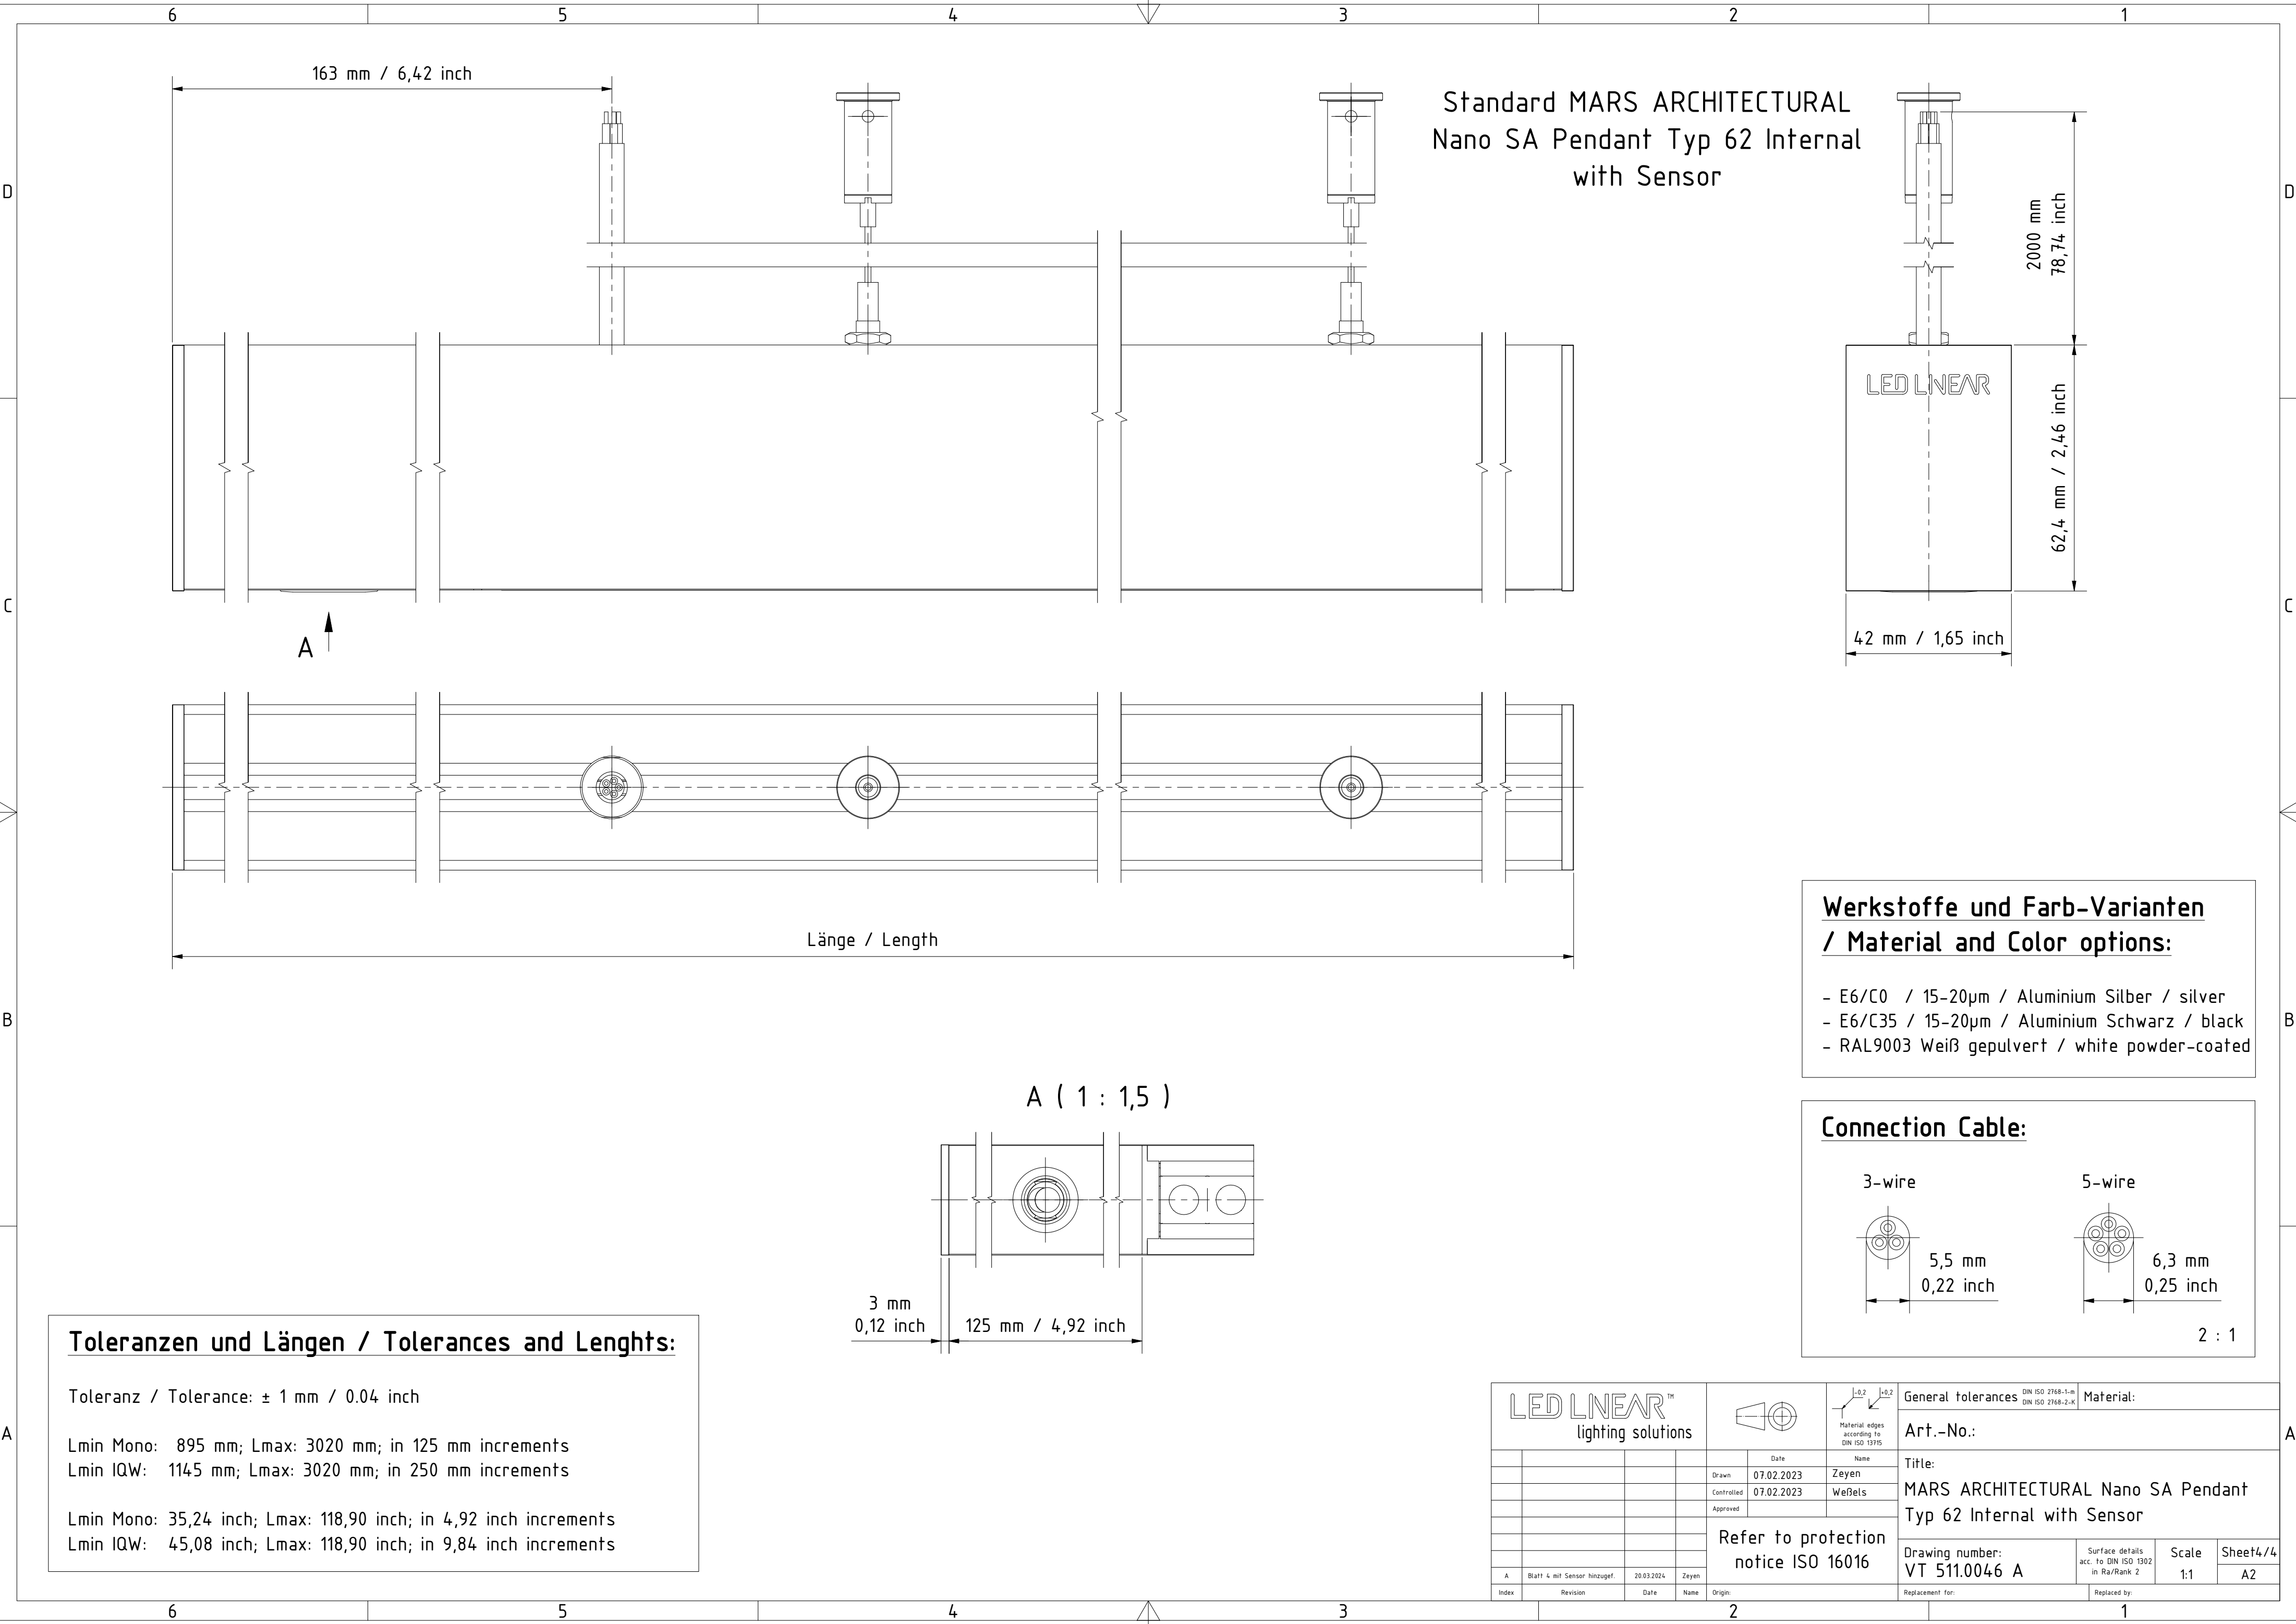


Standard MARS ARCHITECTURAL
Nano SA Pendant Typ 62 Internal
with Sensor

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:

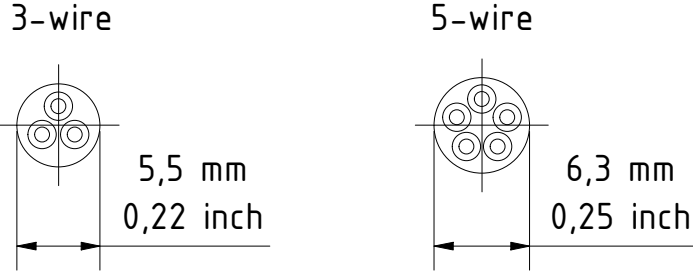


2 : 1

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 895 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 1145 mm; Lmax: 3020 mm; in 250 mm increments

Lmin Mono: 35,24 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 45,08 inch; Lmax: 118,90 inch; in 9,84 inch increments

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:						
						Material edges according to DIN ISO 13715		Art.-No.:								
				Date		Name		Title:								
				Drawn	07.02.2023	Zeyen		MARS ARCHITECTURAL Nano SA Pendant								
				Controlled	07.02.2023	Weßels		Typ 62 Internal with Sensor								
				Approved				Drawing number:								
				Refer to protection notice ISO 16016				VT 511.0046 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1		Sheet4/4		
A	Blatt 4 mit Sensor hinzugef.		20.03.2024			Zeyen									A2	
Index	Revision		Date			Name	Origin:	Replacement for:				Replaced by:				