


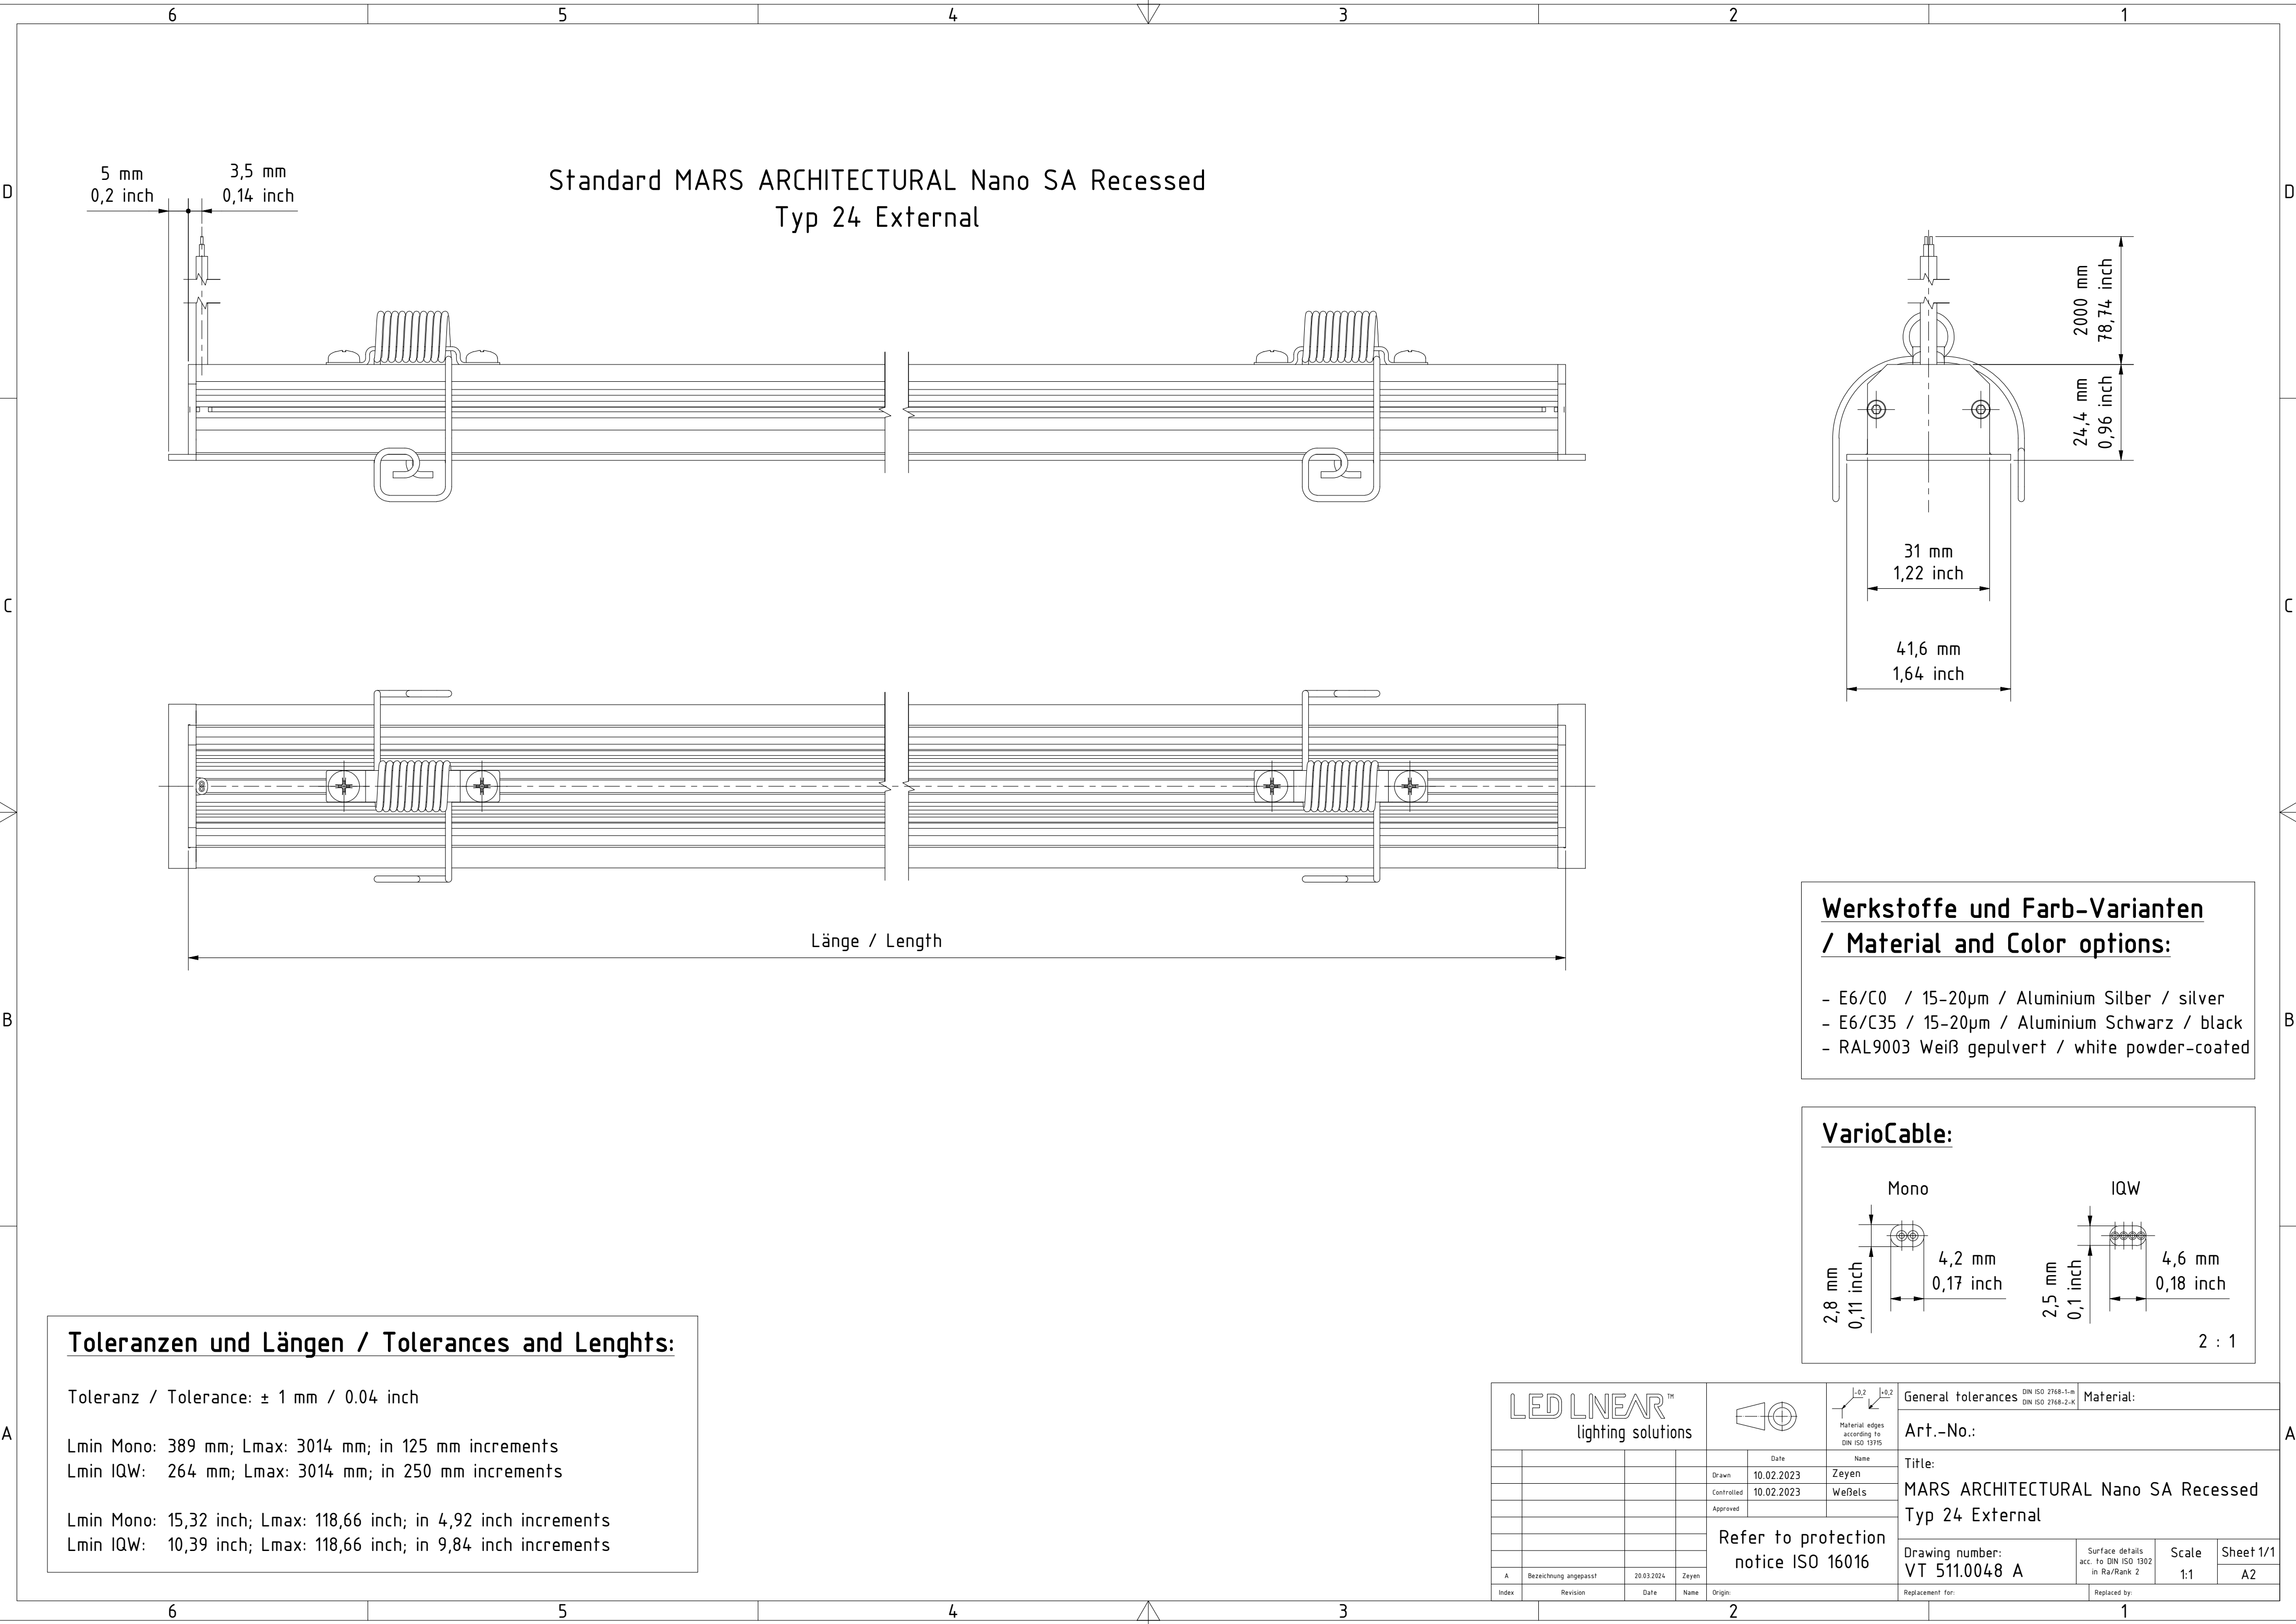

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 389 mm; Lmax: 3014 mm; in 125 mm increments
Lmin IQW: 264 mm; Lmax: 3014 mm; in 250 mm increments

Lmin Mono: 15,32 inch; Lmax: 118,66 inch; in 4,92 inch increments
Lmin IQW: 10,39 inch; Lmax: 118,66 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

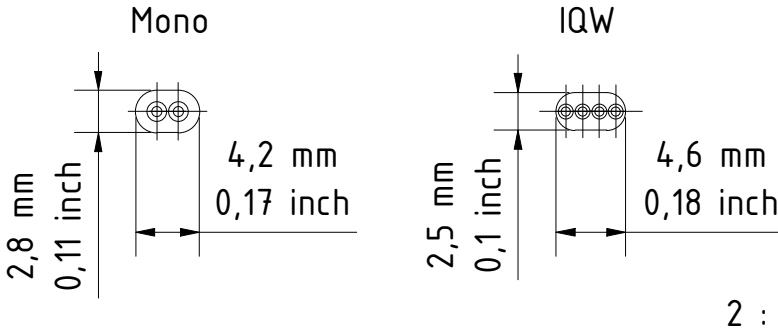

LED LINEAR™ lighting solutions						General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K	Material:		
				Drawn	10.02.2023	Zeyen	Art.-No.:		
				Controlled	10.02.2023	Weßels			
				Approved					
				Refer to protection notice ISO 16016			Title: MARS ARCHITECTURAL Nano SA Recessed Typ 24 External		
A	Bezeichnung angepasst	20.03.2024	Zeyen	Drawing number: VT 511.0048 A			Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet 1/1 A2
Index	Revision	Date	Name	Origin:	Replacement for:			Replaced by:	