


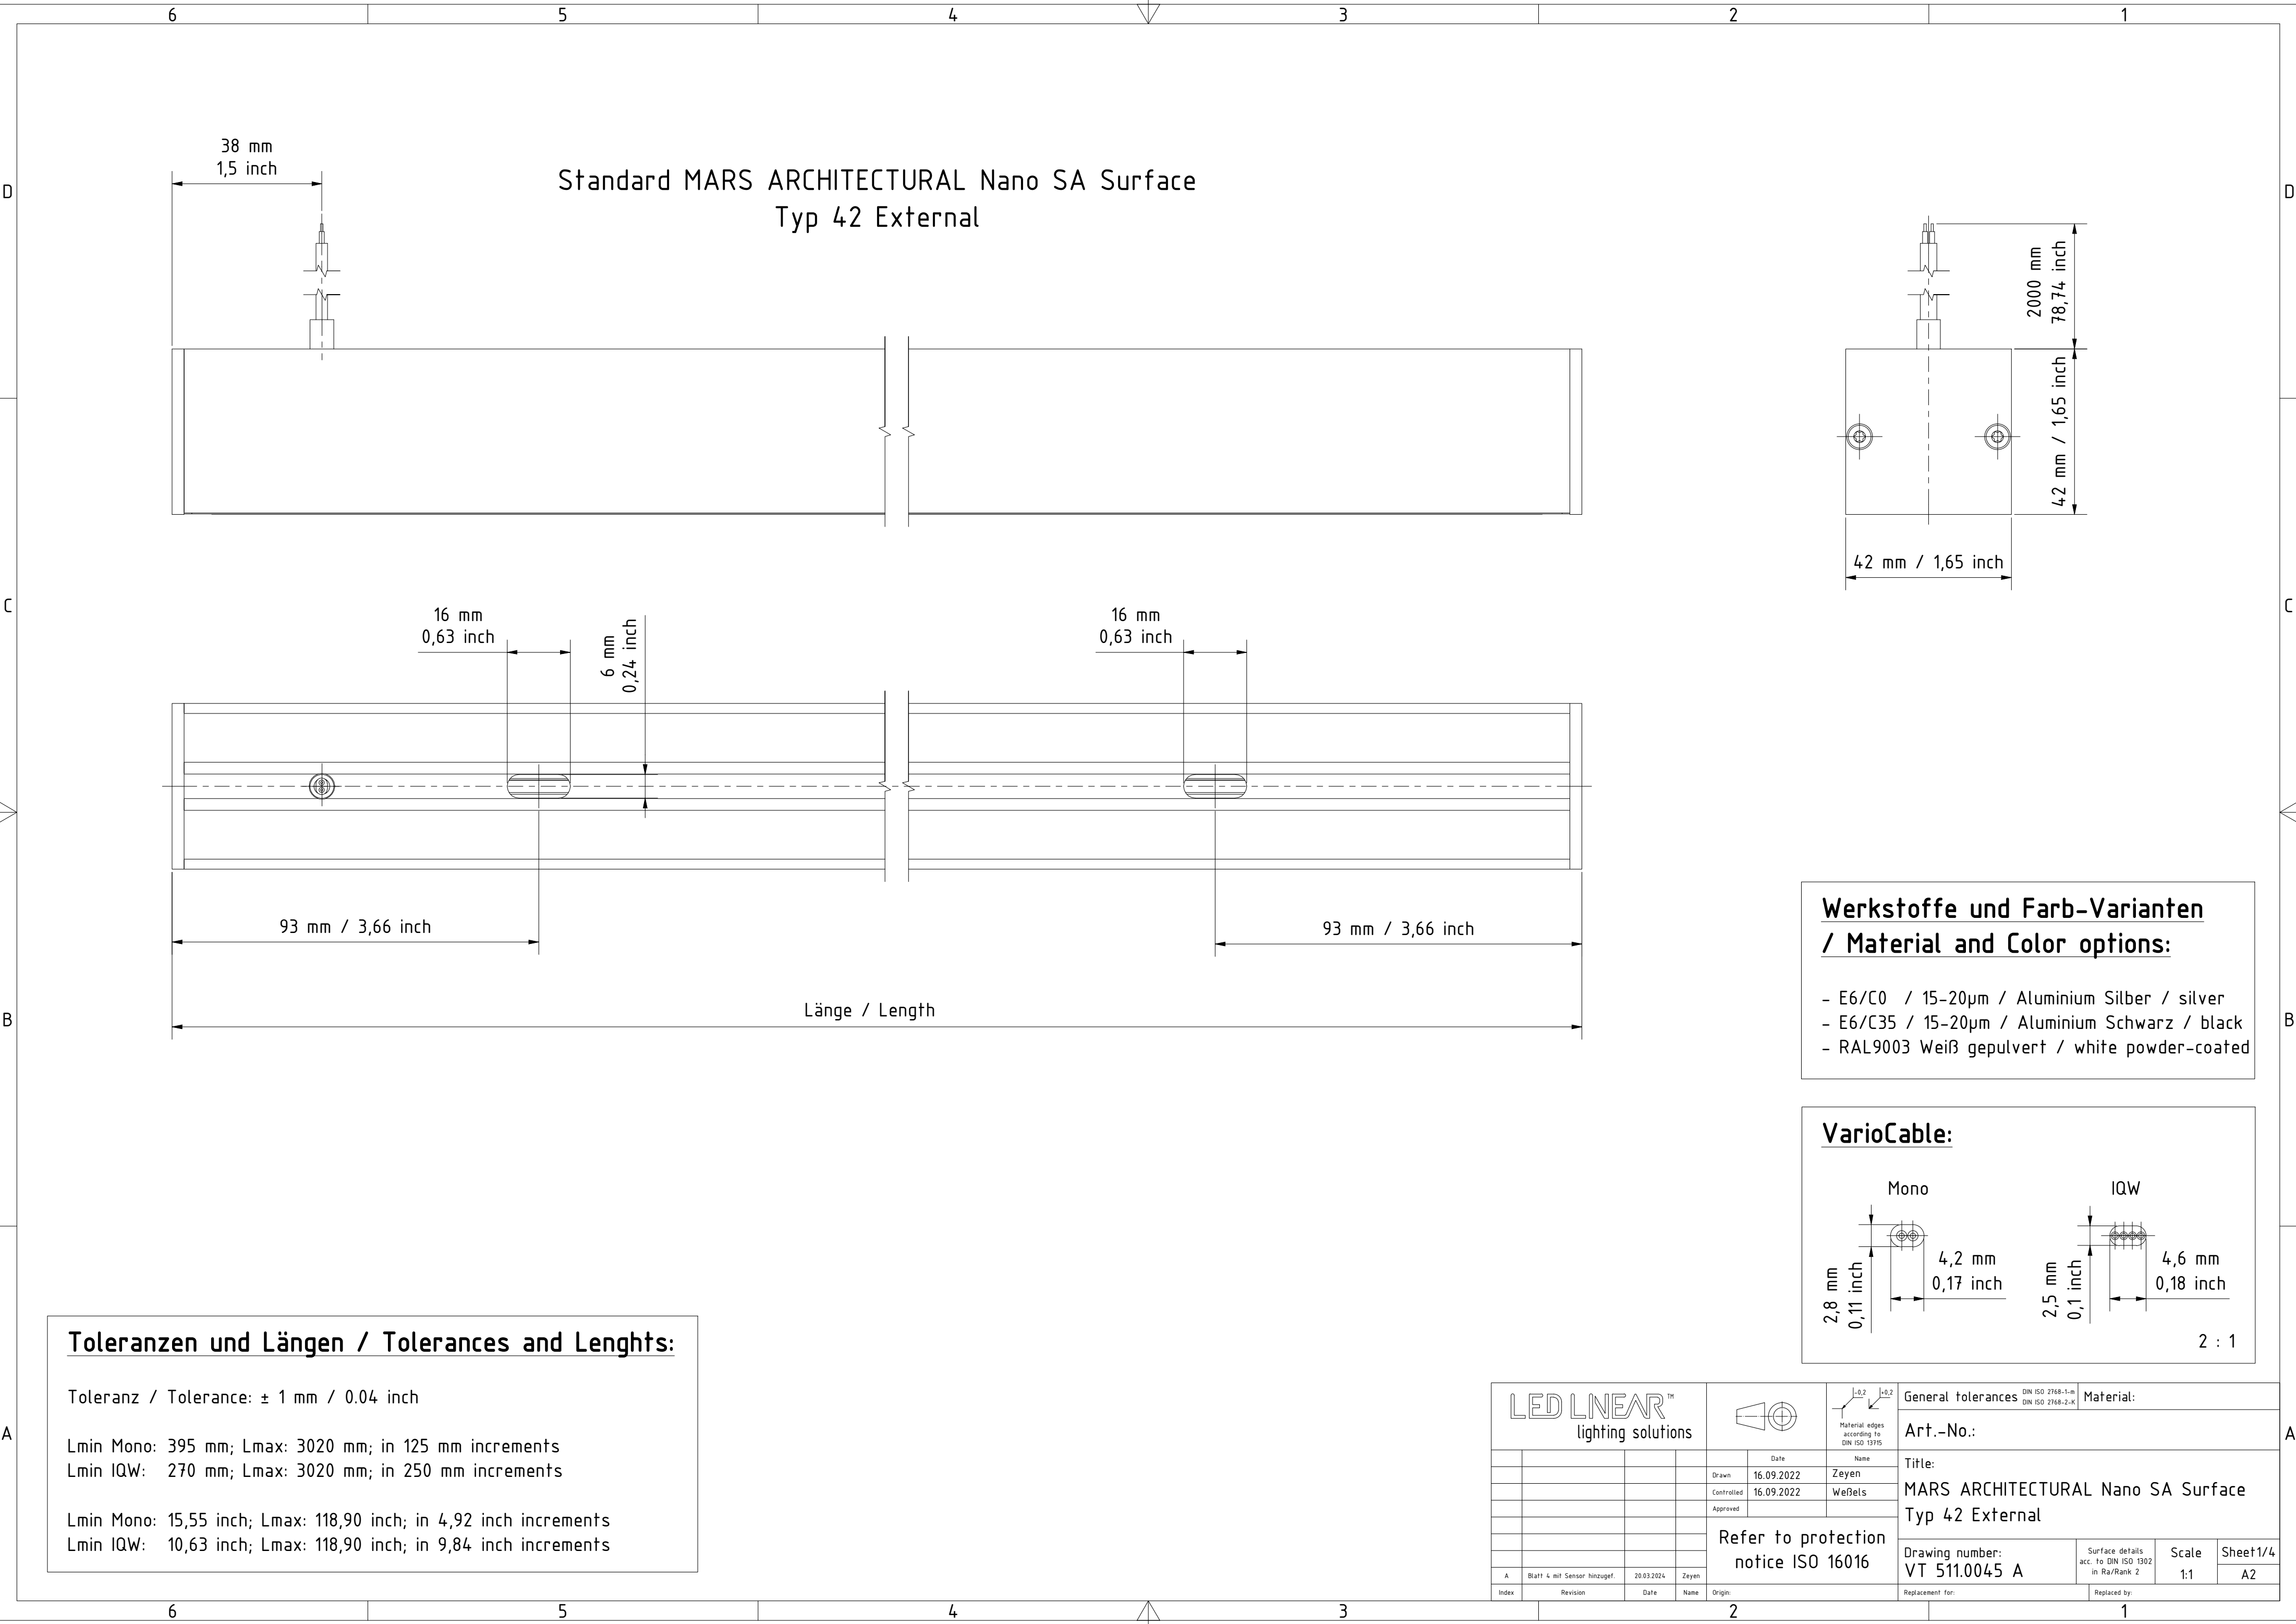

Toleranzen und Längen / Tolerances and Lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 395 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 270 mm; Lmax: 3020 mm; in 250 mm increments


Lmin Mono: 15,55 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 10,63 inch; Lmax: 118,90 inch; in 9,84 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

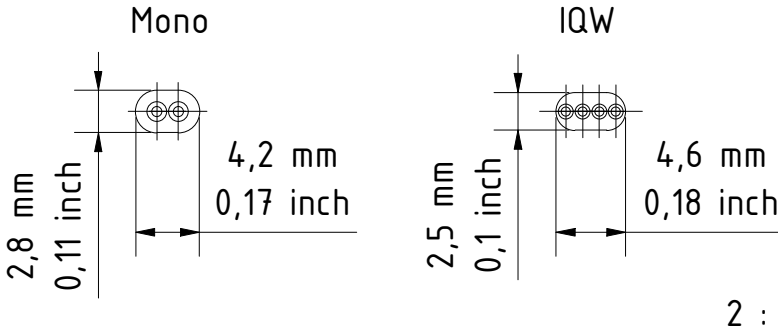

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	16.09.2022	Zeyen		Art.-No.:				
				Controlled	16.09.2022	Weßels		Title:				
				Approved				MARS ARCHITECTURAL Nano SA Surface Typ 42 External				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0045 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet1/4 A2
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen					Replacement for:		Replaced by:	
Index	Revision		Date	Name	Origin:							

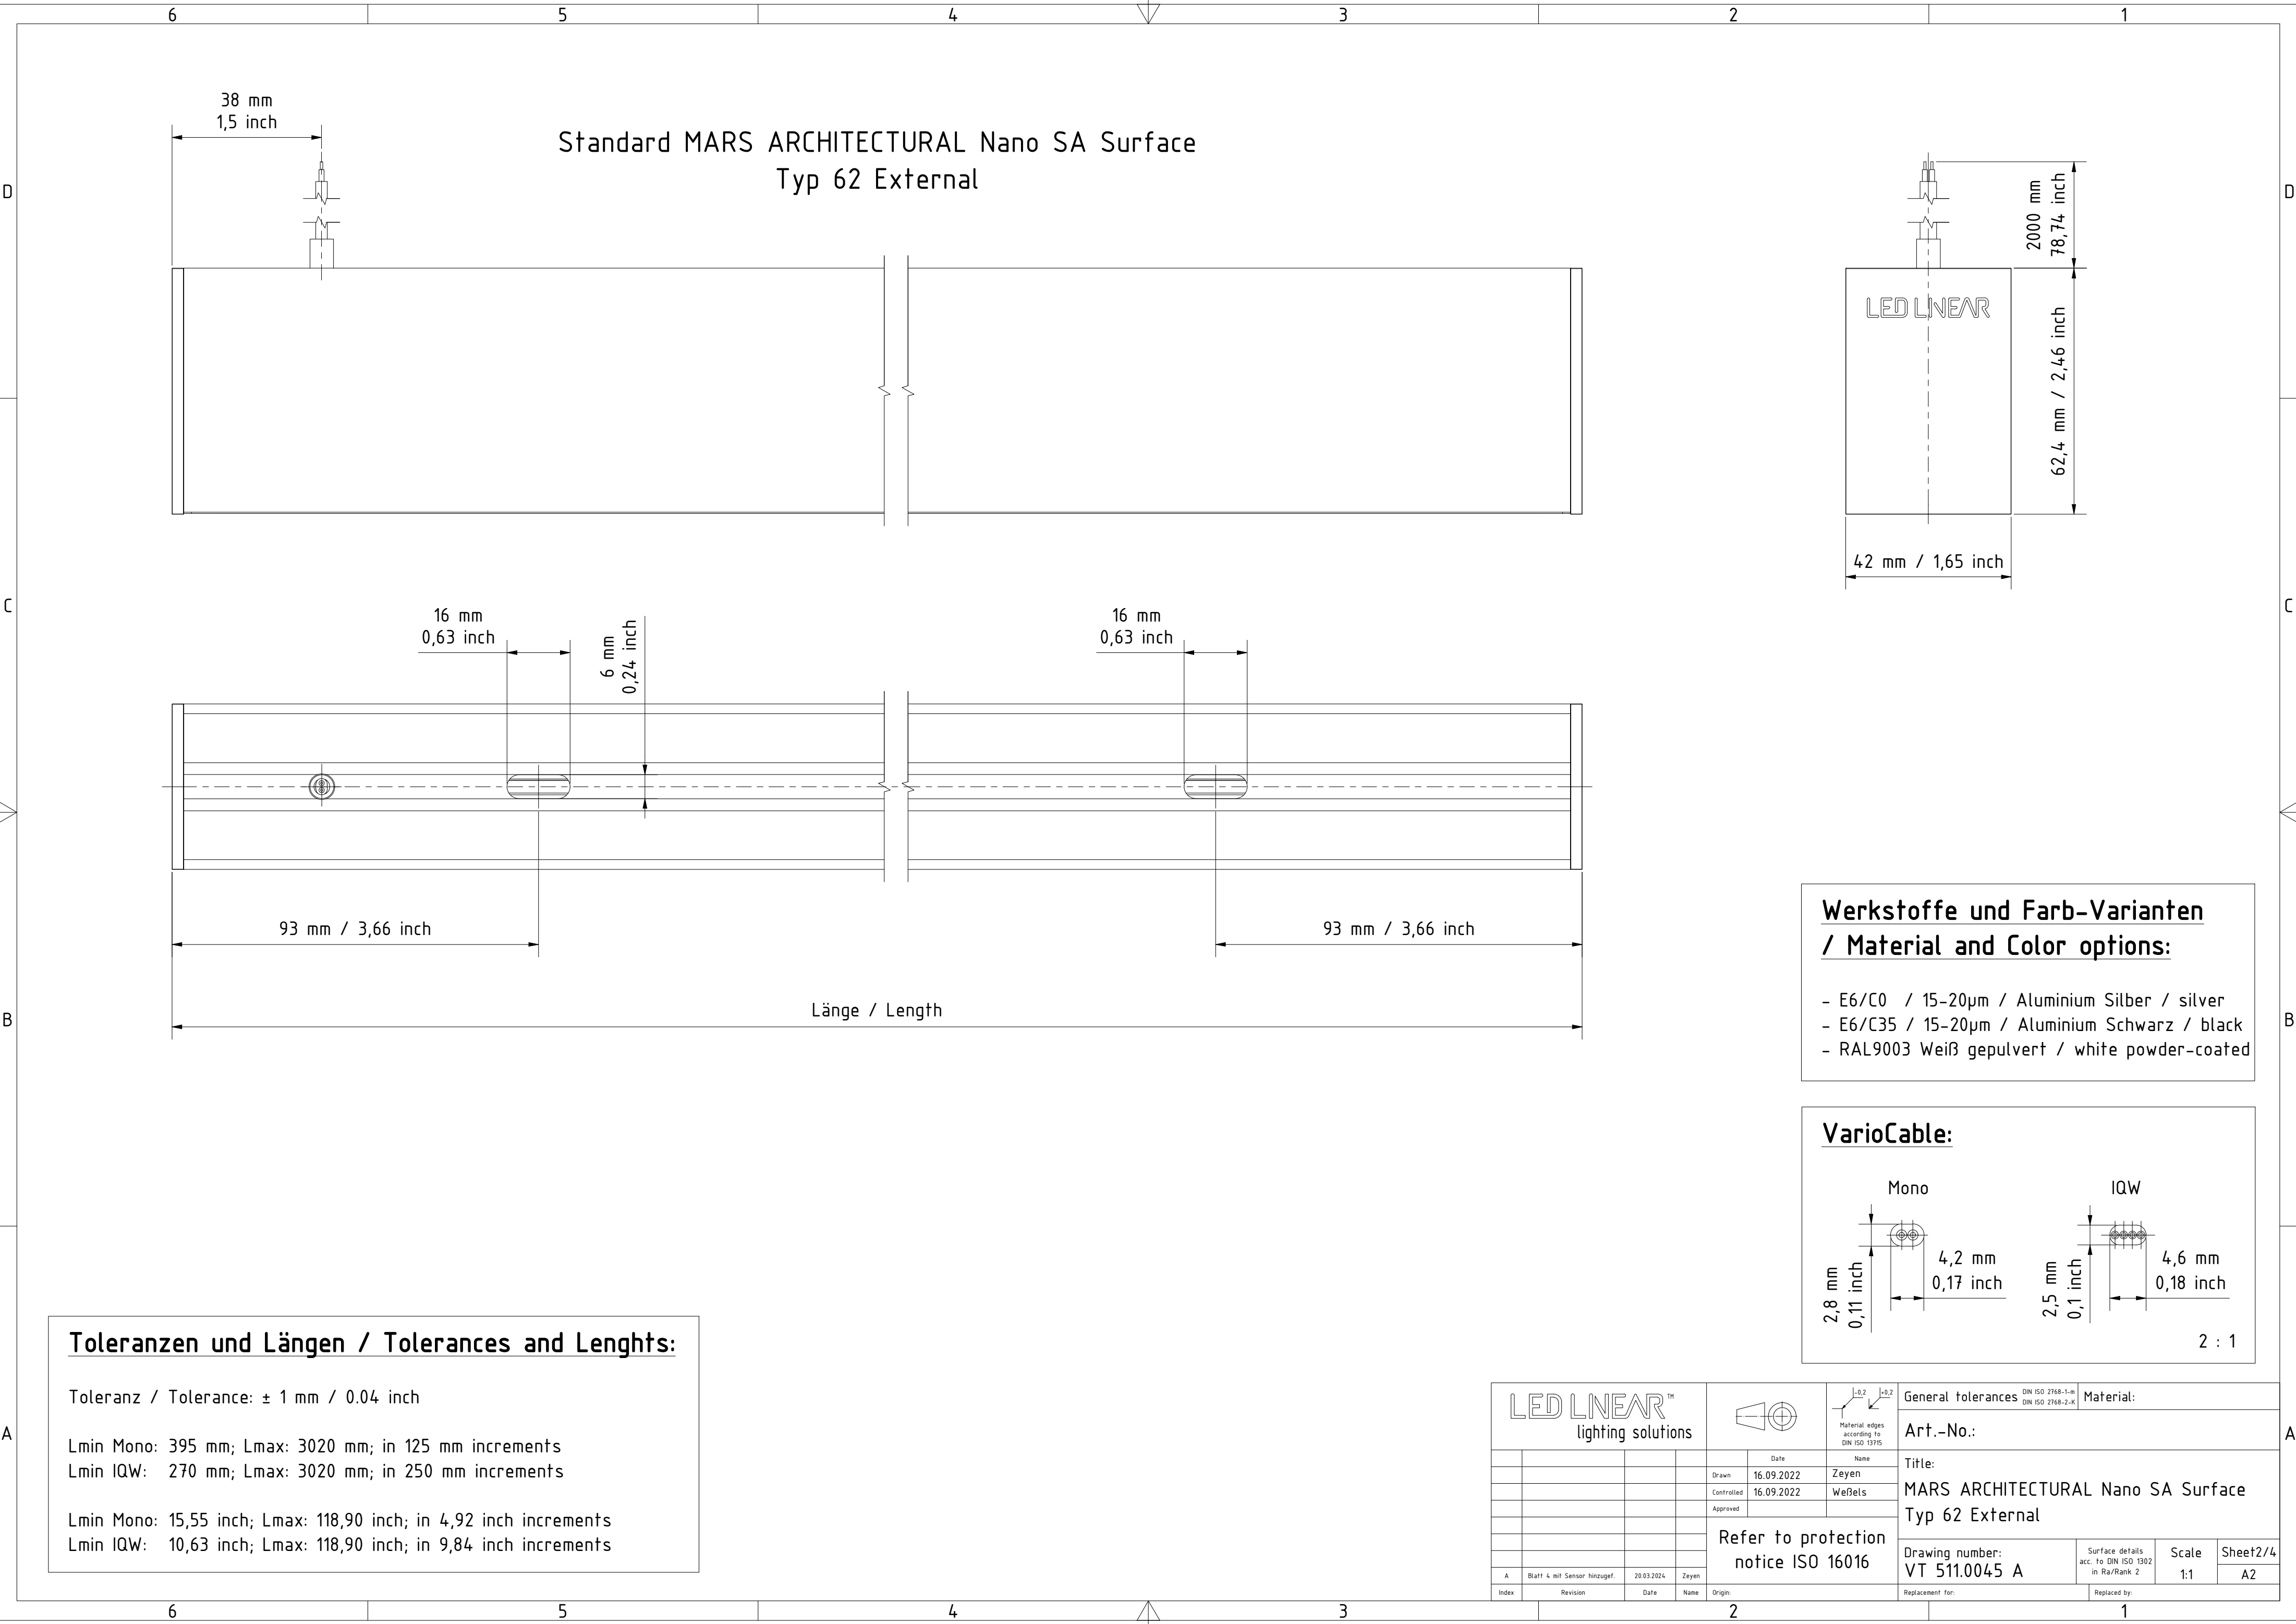

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 395 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 270 mm; Lmax: 3020 mm; in 250 mm increments

Lmin Mono: 15,55 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 10,63 inch; Lmax: 118,90 inch; in 9,84 inch increments

Werkstoffe und Farb-Varianten / Material and Color options:



- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:



Mono IQW

2,8 mm 0,11 inch 4,2 mm 0,17 inch 2,5 mm 0,1 inch 4,6 mm 0,18 inch

2 : 1

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
					Date		Name	Art.-No.:				
				Drawn	16.09.2022		Zeyen	Title:				
				Controlled	16.09.2022		Weßels	MARS ARCHITECTURAL Nano SA Surface				
				Approved				Typ 62 External				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0045 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet2/4 A2
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen				Replacement for:		Replaced by:		
Index	Revision		Date	Name	Origin:							

Standard MARS ARCHITECTURAL Nano SA Surface
Typ 62 Internal

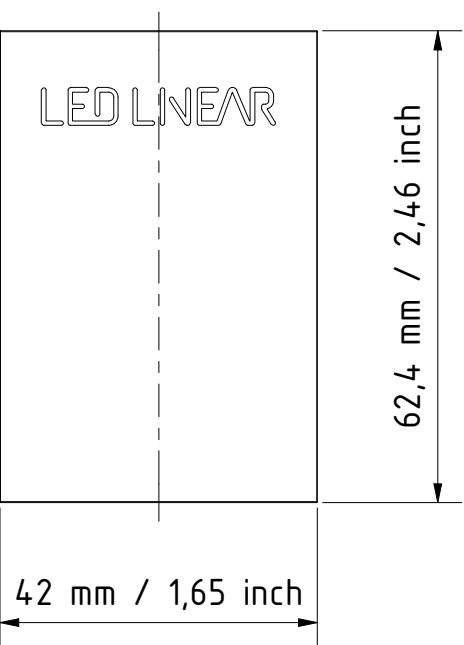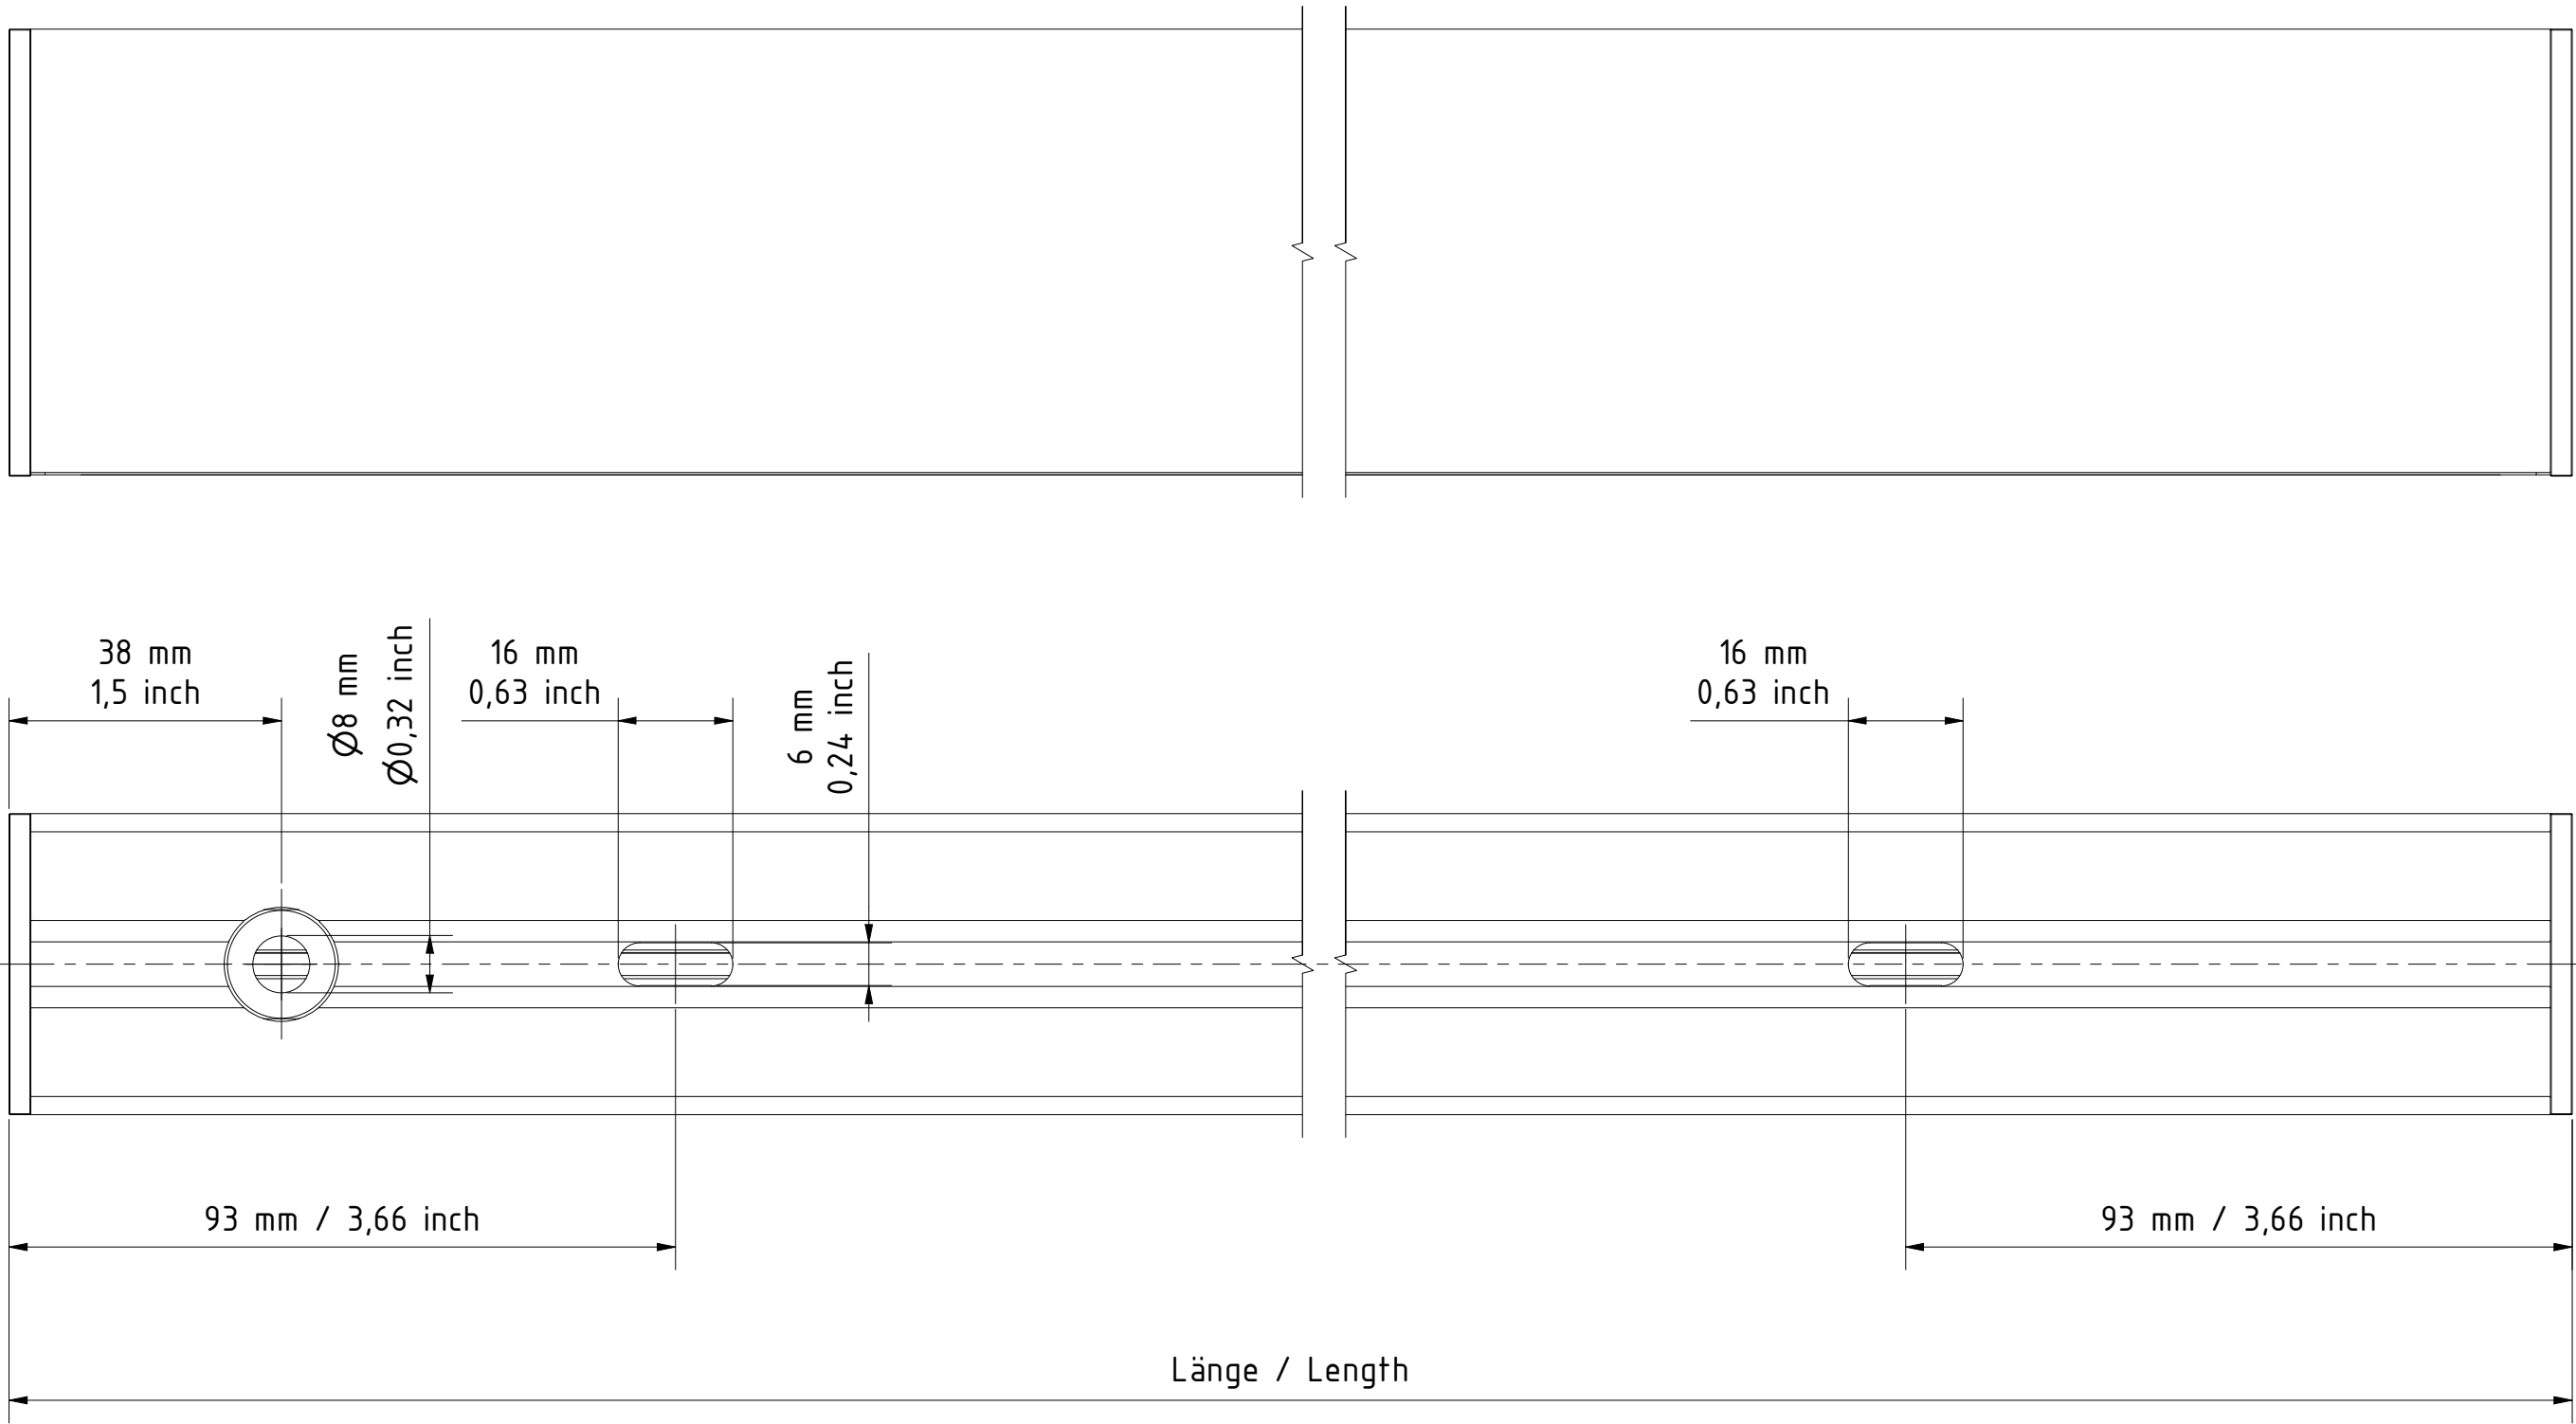

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 770 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 1020 mm; Lmax: 3020 mm; in 250 mm increments




Lmin Mono: 30,32 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 40,16 inch; Lmax: 118,90 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
				Date		Name		Title:				
				Drawn	16.09.2022	Zeyen		MARS ARCHITECTURAL Nano SA Surface				
				Controlled	16.09.2022	Weßels		Typ 62 Internal				
				Approved				Drawing number:				
				Refer to protection notice ISO 16016				VT 511.0045 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/4 A2
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen					Replacement for:		Replaced by:	
Index	Revision		Date	Name	Origin:							

Standard MARS ARCHITECTURAL Nano SA Surface
Typ 62 Internal with Sensor

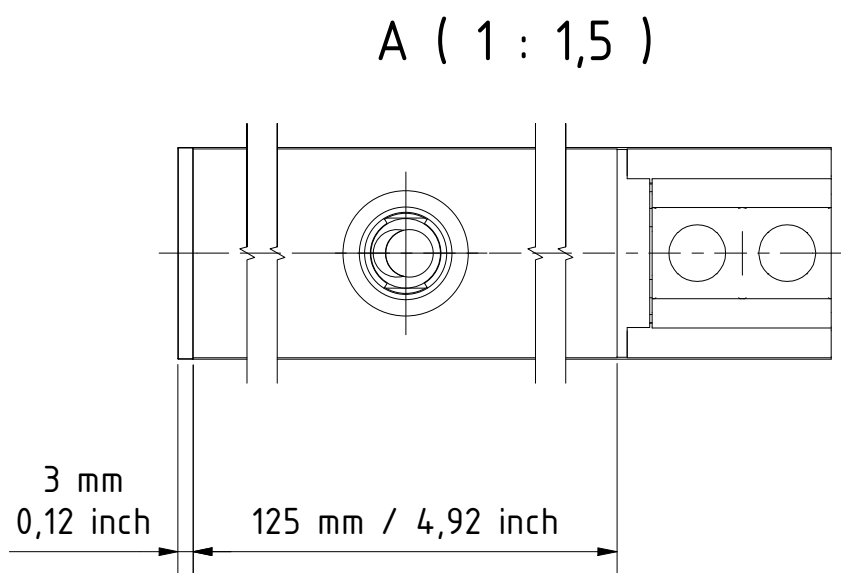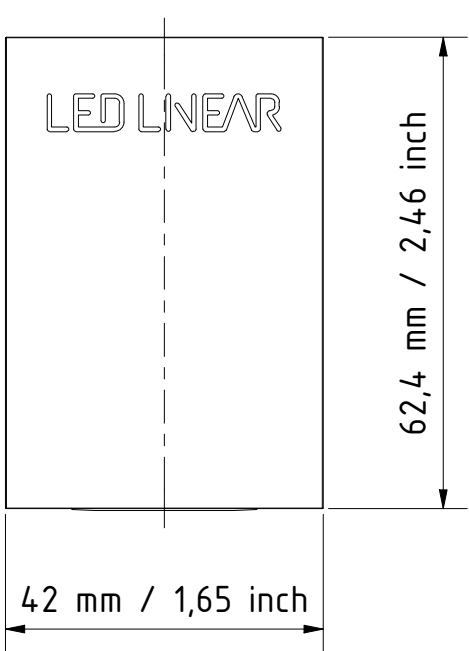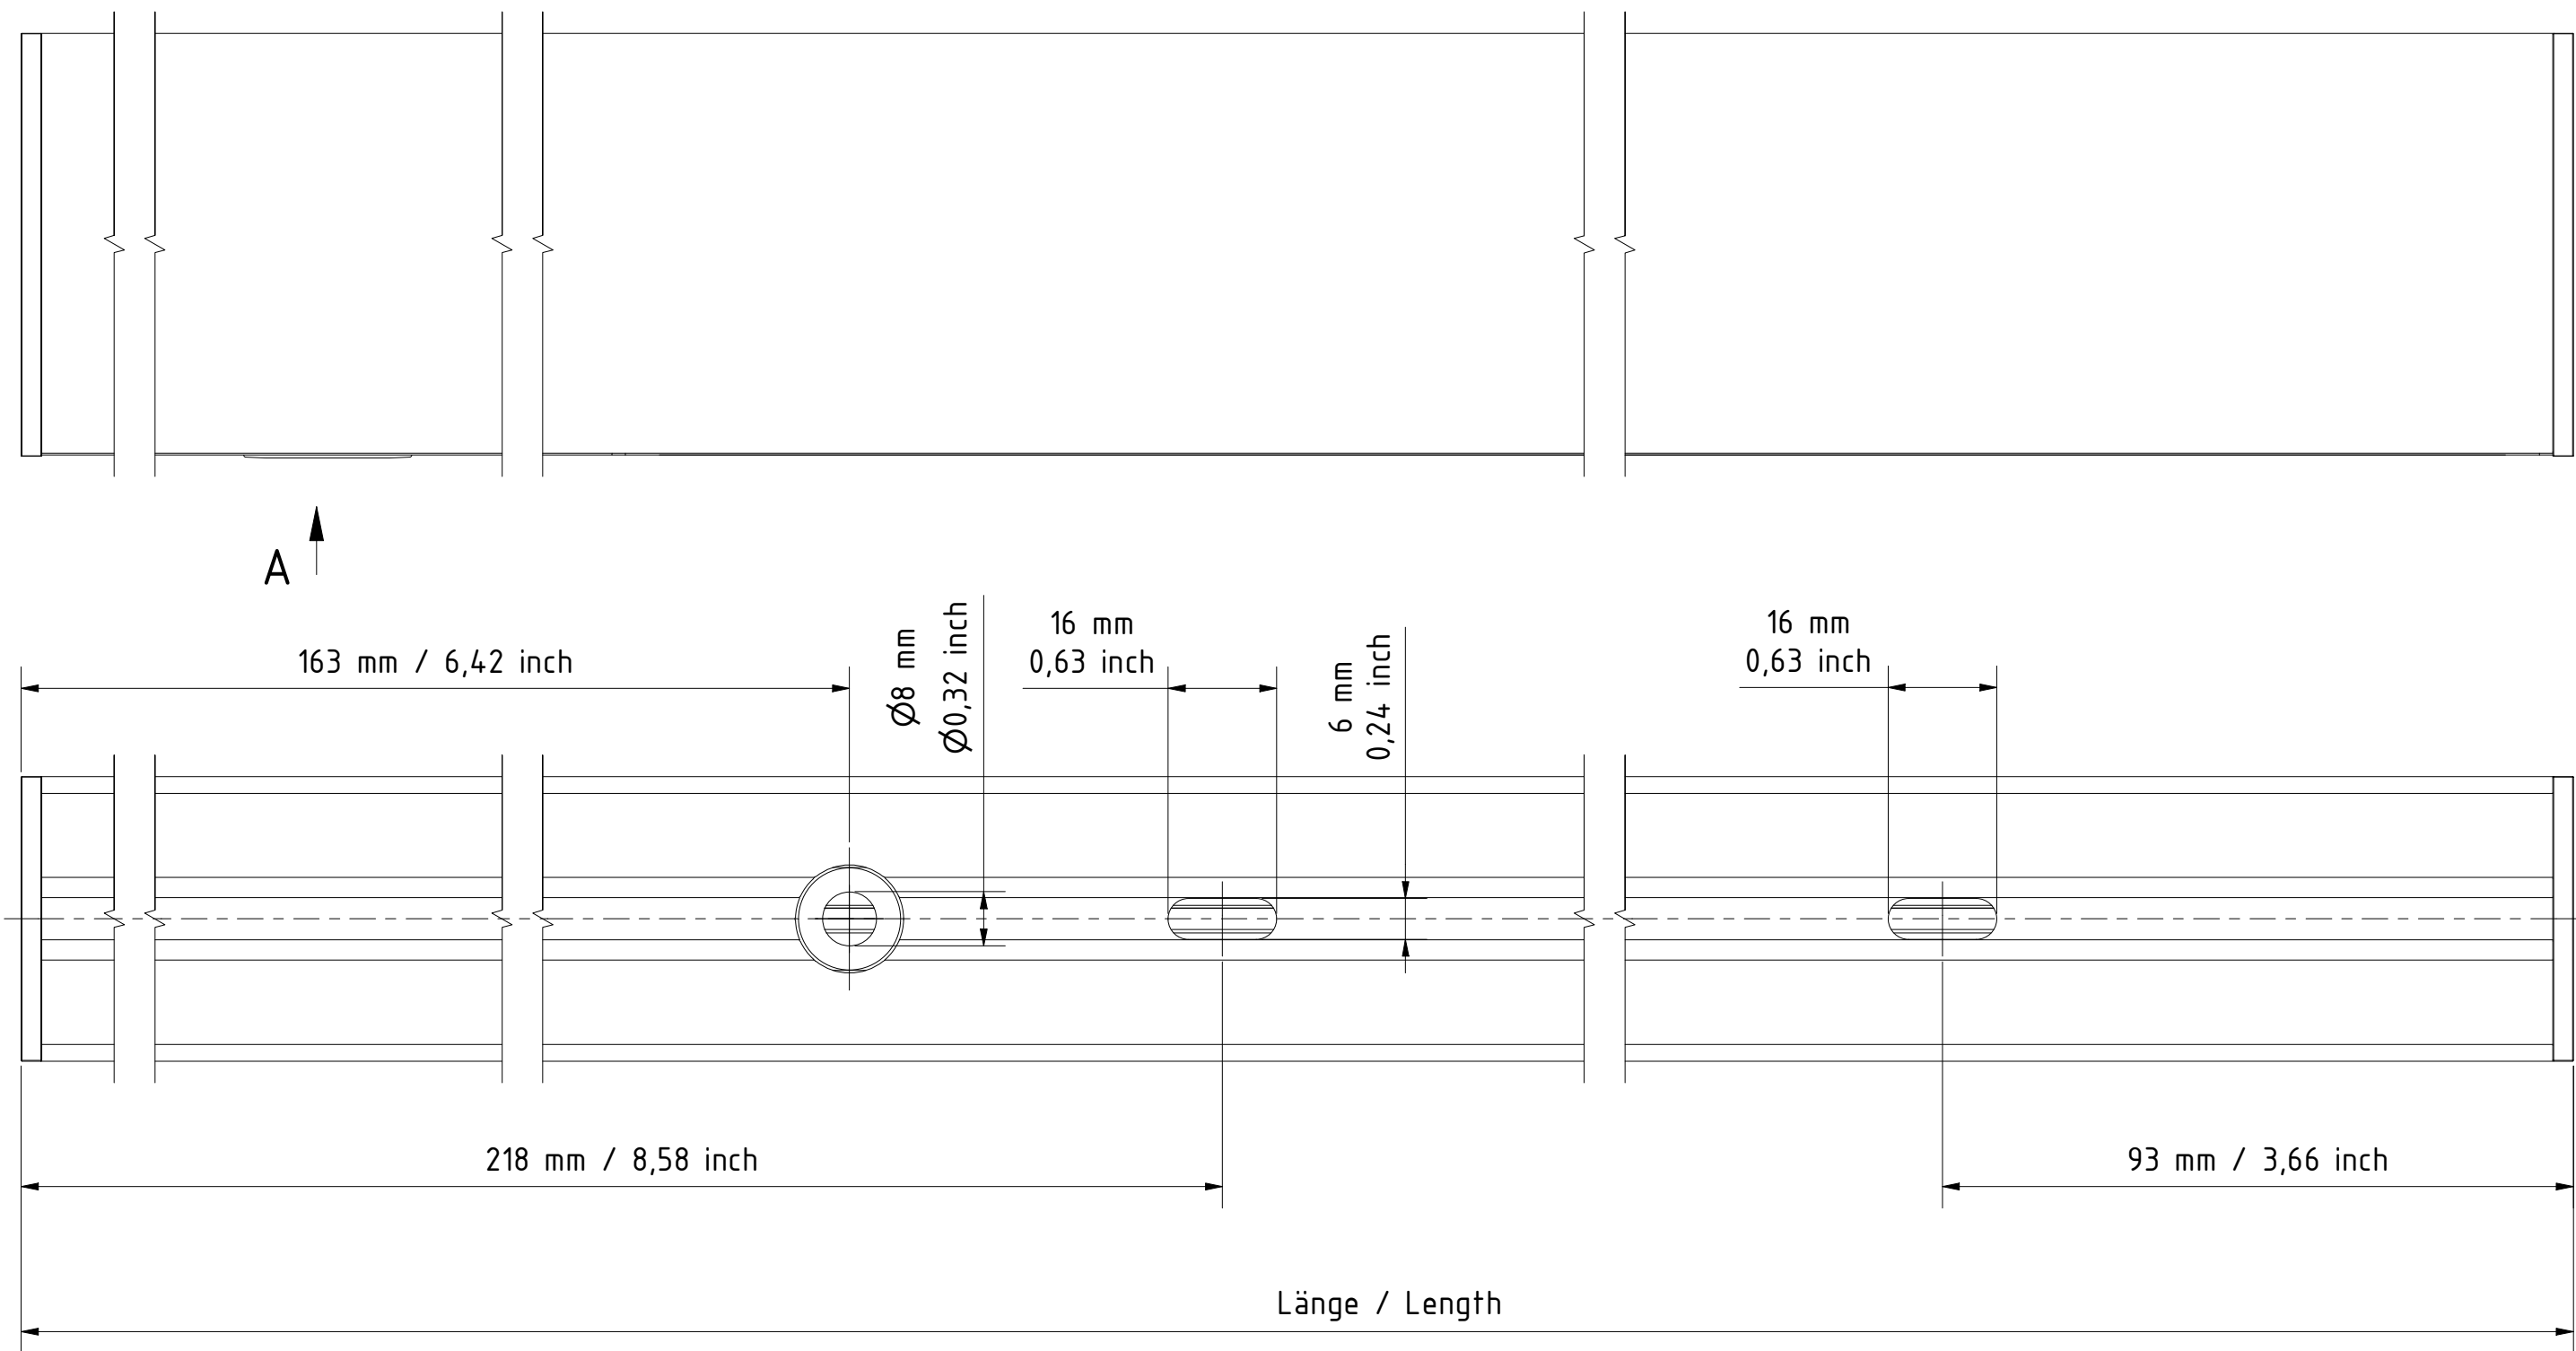

Toleranzen und Längen / Tolerances and Lenghts:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 895 mm; Lmax: 3020 mm; in 125 mm increments
Lmin IQW: 1145 mm; Lmax: 3020 mm; in 250 mm increments

Lmin Mono: 35,24 inch; Lmax: 118,90 inch; in 4,92 inch increments
Lmin IQW: 45,08 inch; Lmax: 118,90 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
				Date		Name		Title:				
				Drawn	16.09.2022	Zeyen		MARS ARCHITECTURAL Nano SA Surface				
				Controlled	16.09.2022	Weßels		Typ 62 Internal with Sensor				
				Approved				Drawing number:				
				Refer to protection notice ISO 16016				VT 511.0045 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet4/4
A	Blatt 4 mit Sensor hinzugef.		20.03.2024					Zeyen				
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:			