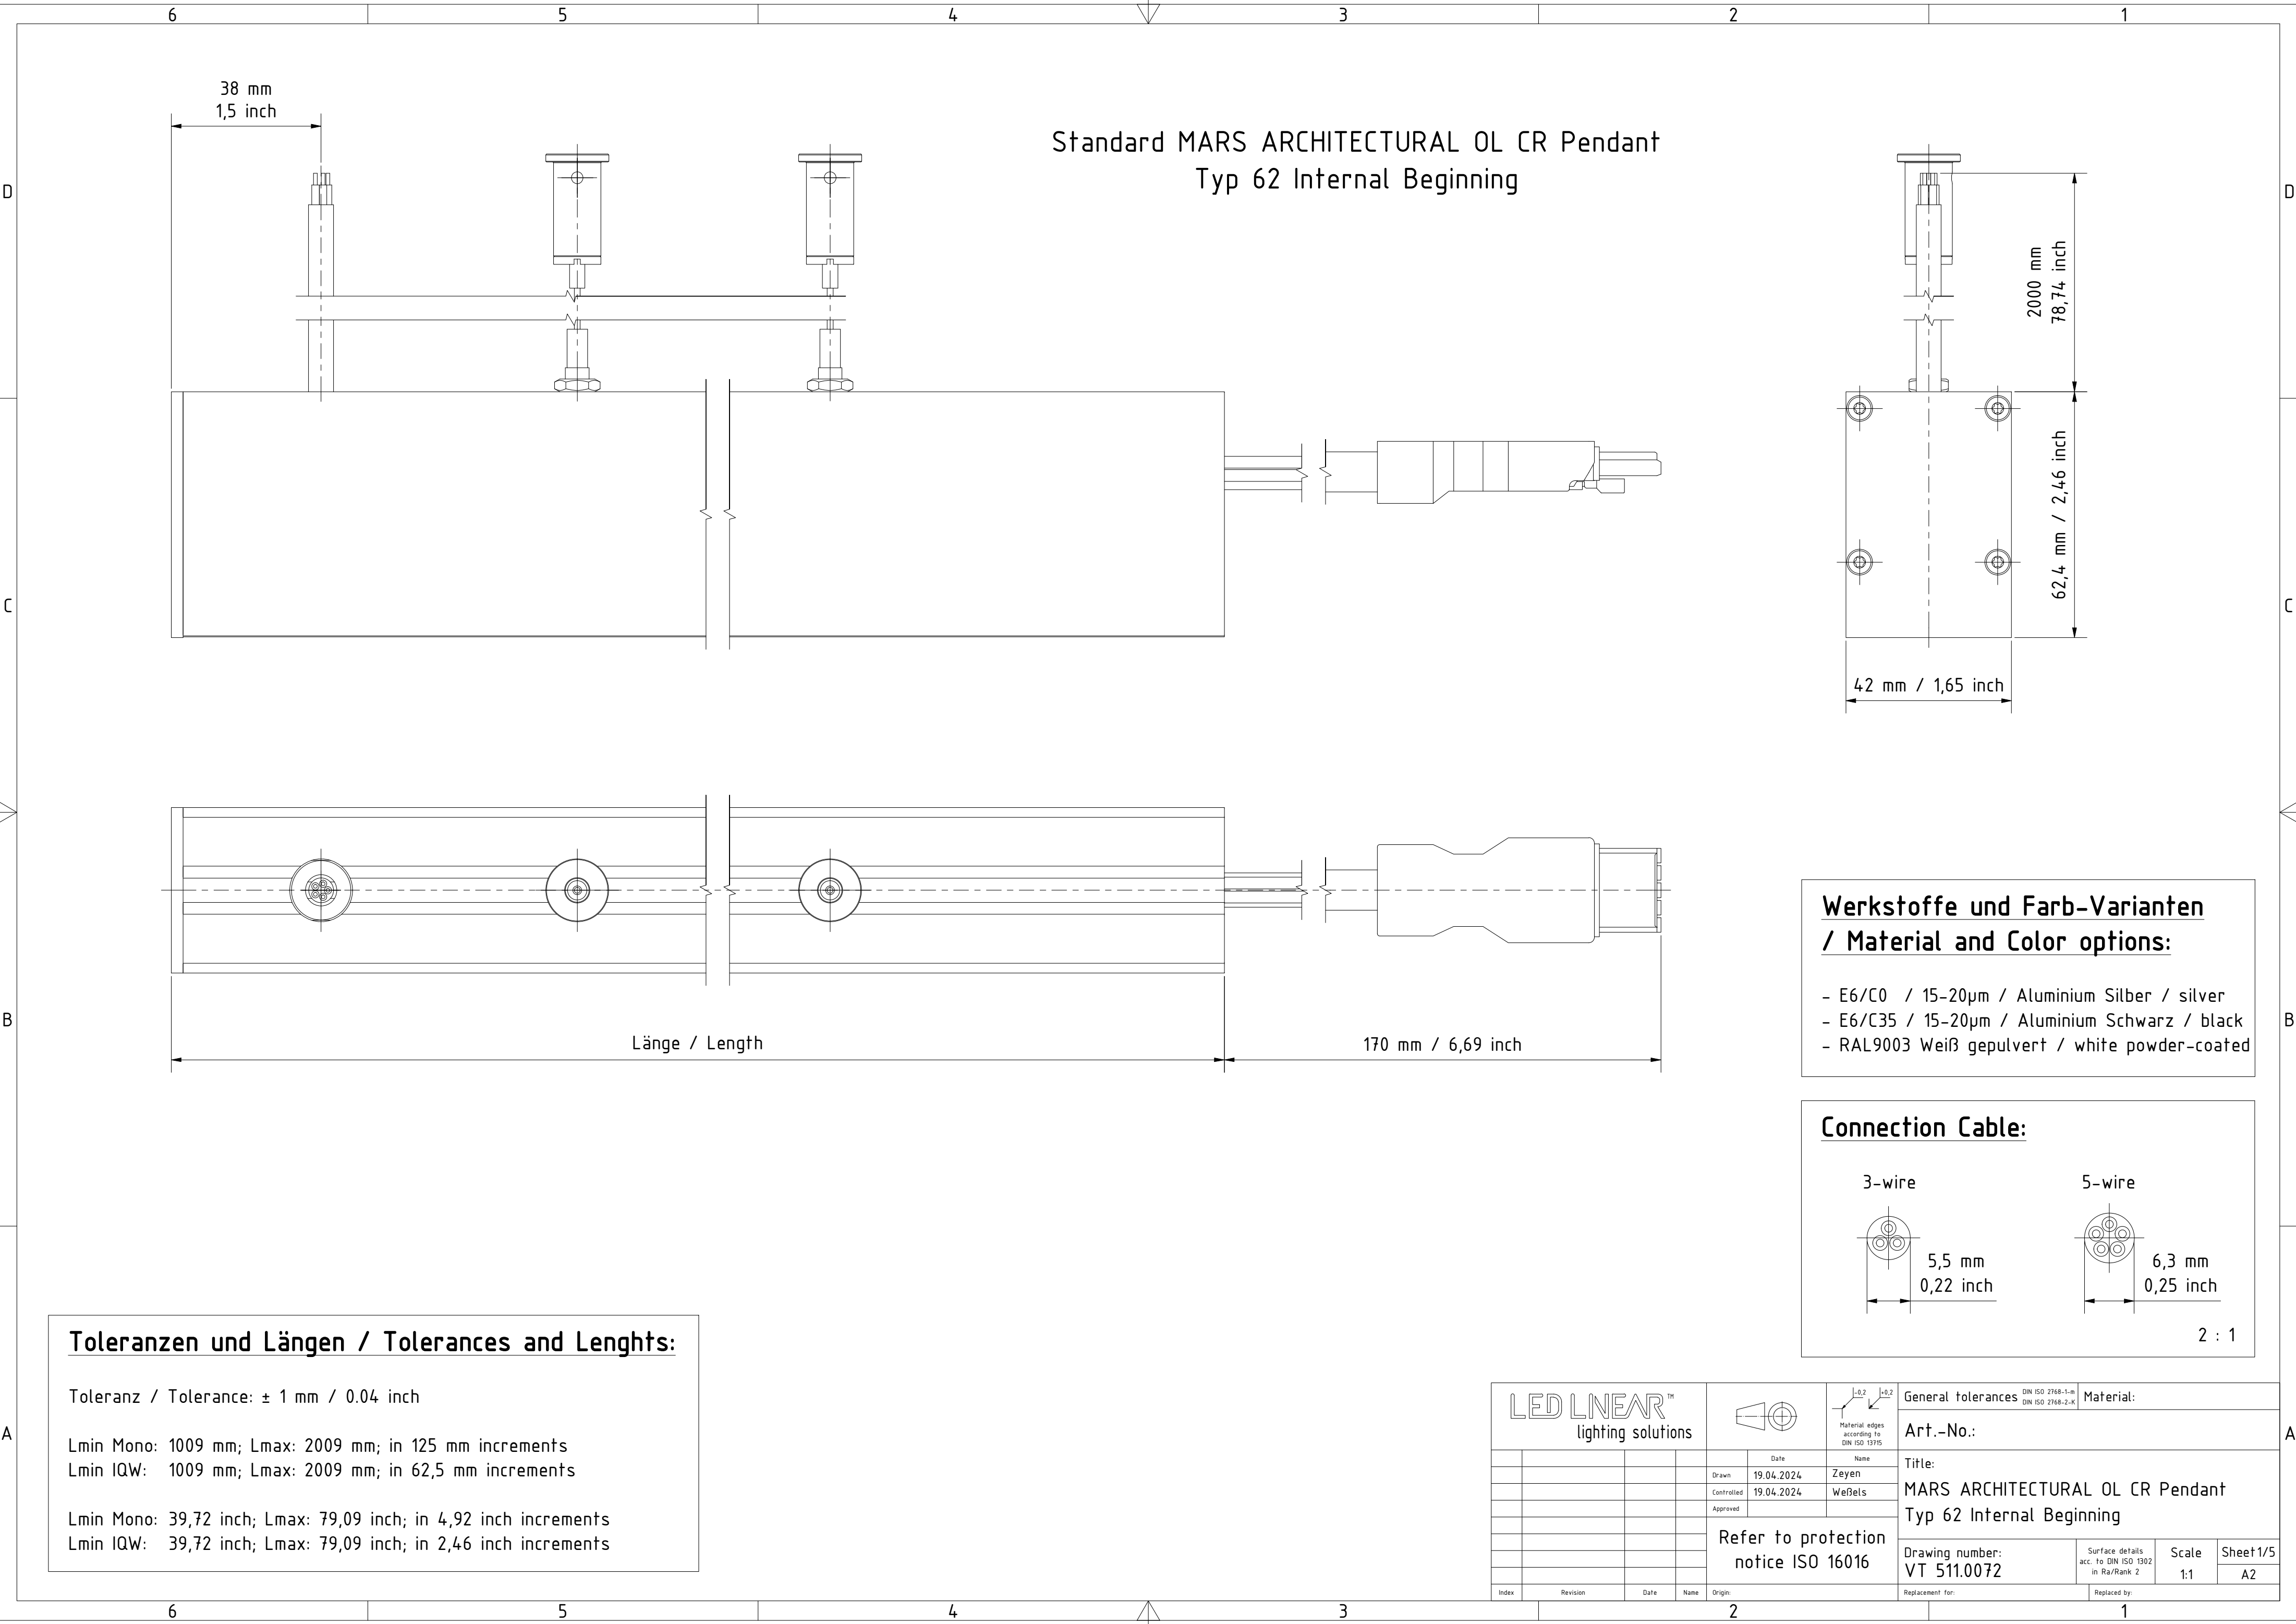


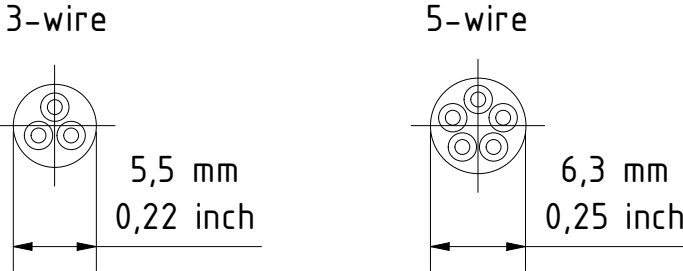


Standard MARS ARCHITECTURAL OL CR Pendant
Typ 62 Internal Beginning

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:





2 : 1

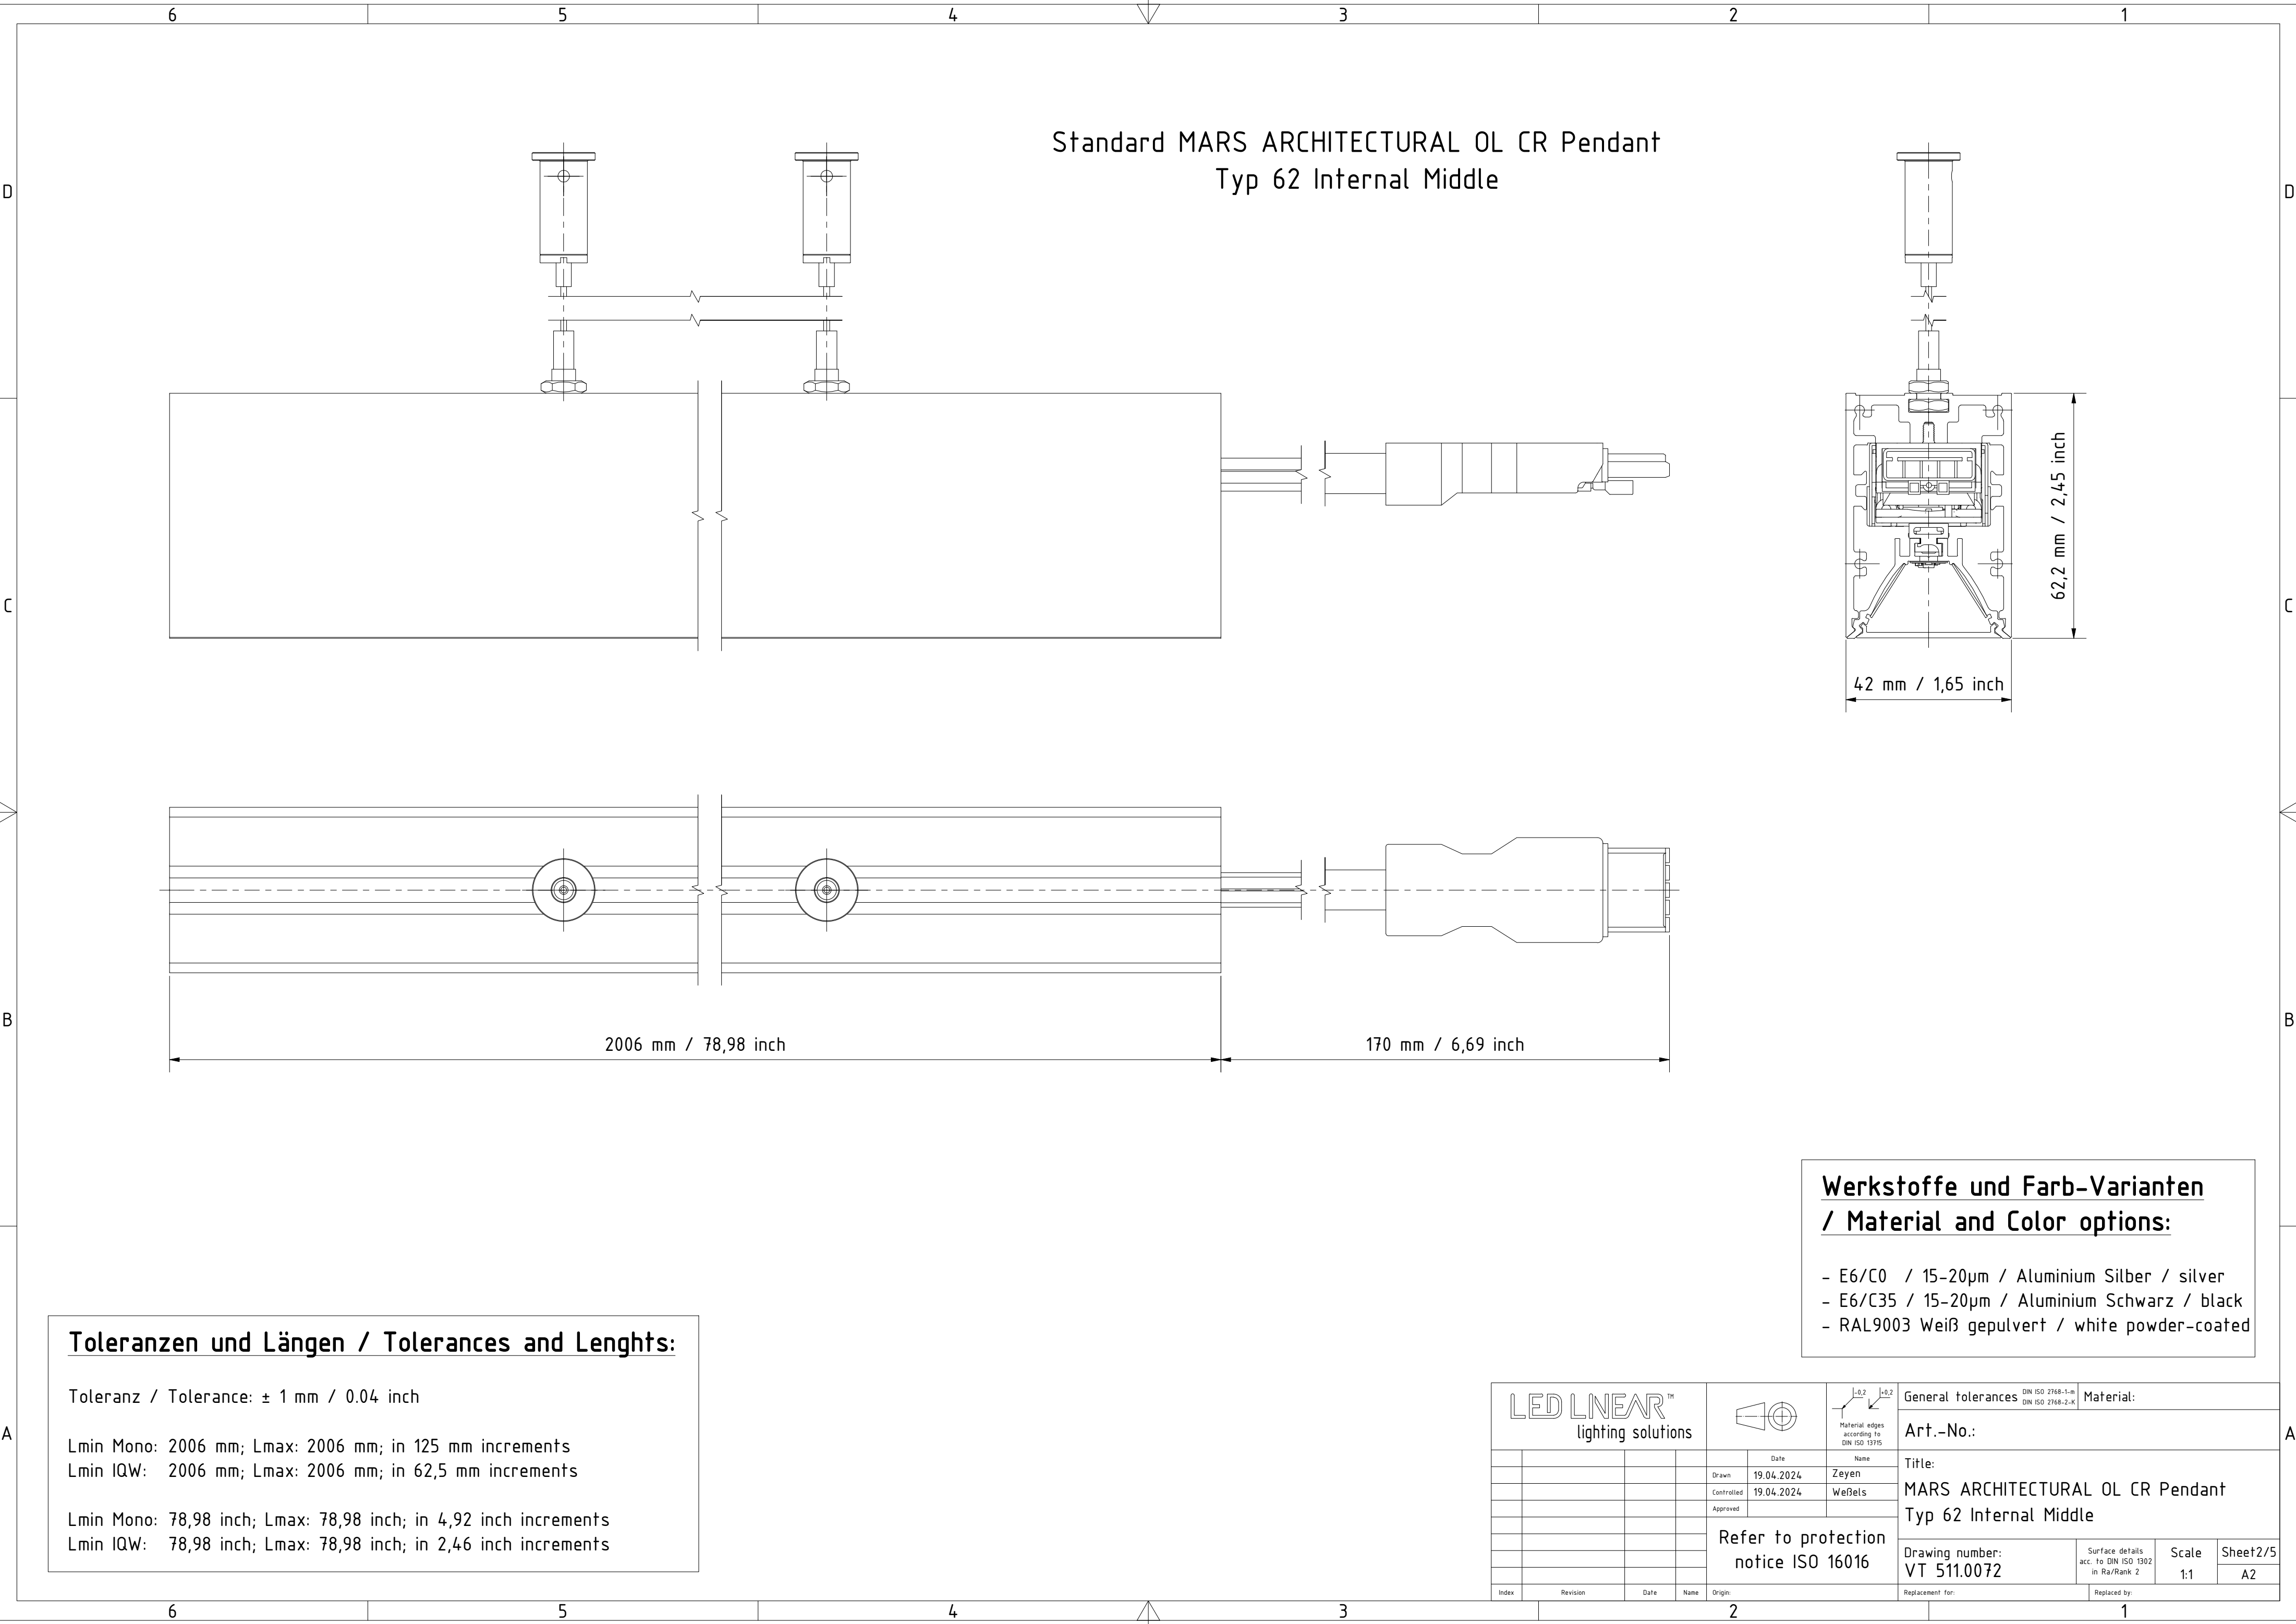
Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch

Lmin Mono: 1009 mm; Lmax: 2009 mm; in 125 mm increments
Lmin IQW: 1009 mm; Lmax: 2009 mm; in 62,5 mm increments

Lmin Mono: 39,72 inch; Lmax: 79,09 inch; in 4,92 inch increments
Lmin IQW: 39,72 inch; Lmax: 79,09 inch; in 2,46 inch increments

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
					Date		Name	Art.-No.:				
				Drawn	19.04.2024		Zeyen	Title:				
				Controlled	19.04.2024		Weßels	MARS ARCHITECTURAL OL CR Pendant				
				Approved				Typ 62 Internal Beginning				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0072		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet 1/5
Index	Revision	Date	Name	Origin:	Replacement for:					Replaced by:		



Toleranzen und Längen / Tolerances and Lenghts:


Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch

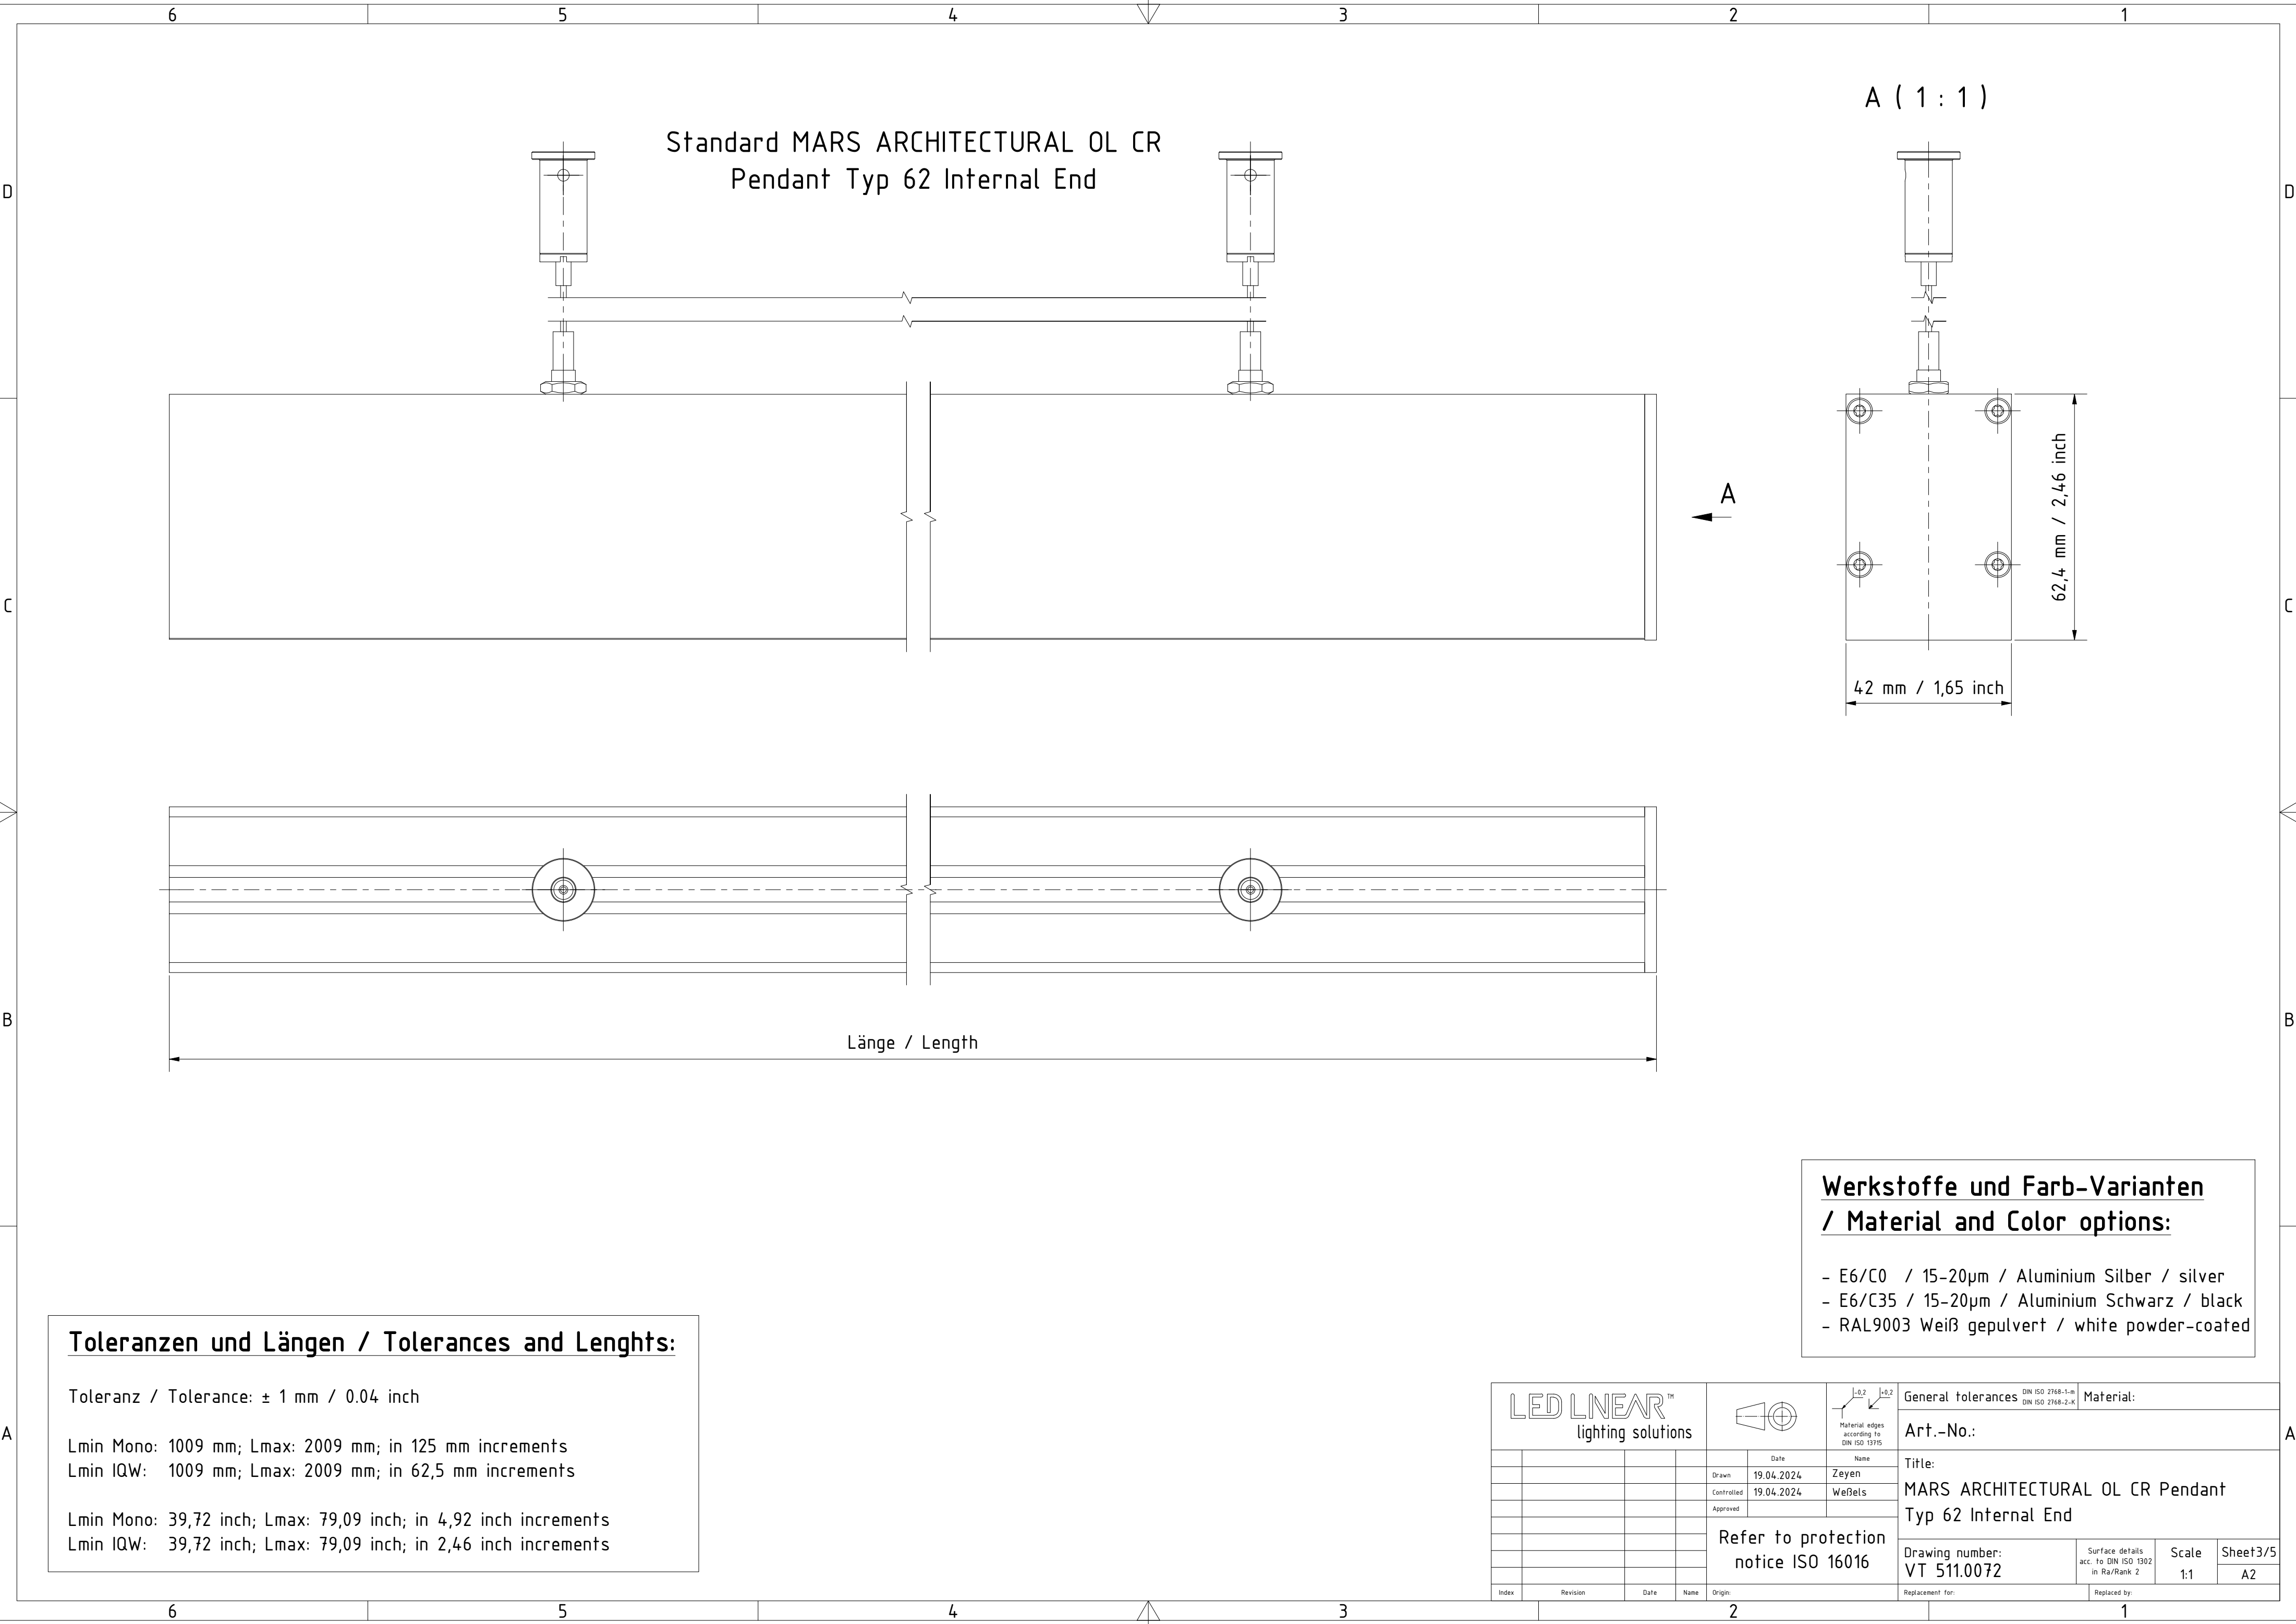
Lmin Mono: 2006 mm; Lmax: 2006 mm; in 125 mm increments
Lmin IQW: 2006 mm; Lmax: 2006 mm; in 62,5 mm increments

Lmin Mono: 78,98 inch; Lmax: 78,98 inch; in 4,92 inch increments
Lmin IQW: 78,98 inch; Lmax: 78,98 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
				Date		Name		Title:				
				Drawn	19.04.2024	Zeyen		MARS ARCHITECTURAL OL CR Pendant				
				Controlled	19.04.2024	Weßels		Typ 62 Internal Middle				
				Approved								
				Refer to protection notice ISO 16016								
										Drawing number: VT 511.0072		
										Surface details acc. to DIN ISO 1302 in Ra/Rank 2		
										Scale 1:1		
										Sheet2/5 A2		
Index	Revision	Date	Name	Origin:	Replacement for:						Replaced by:	



Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: ± 1 mm / 0.04 inch

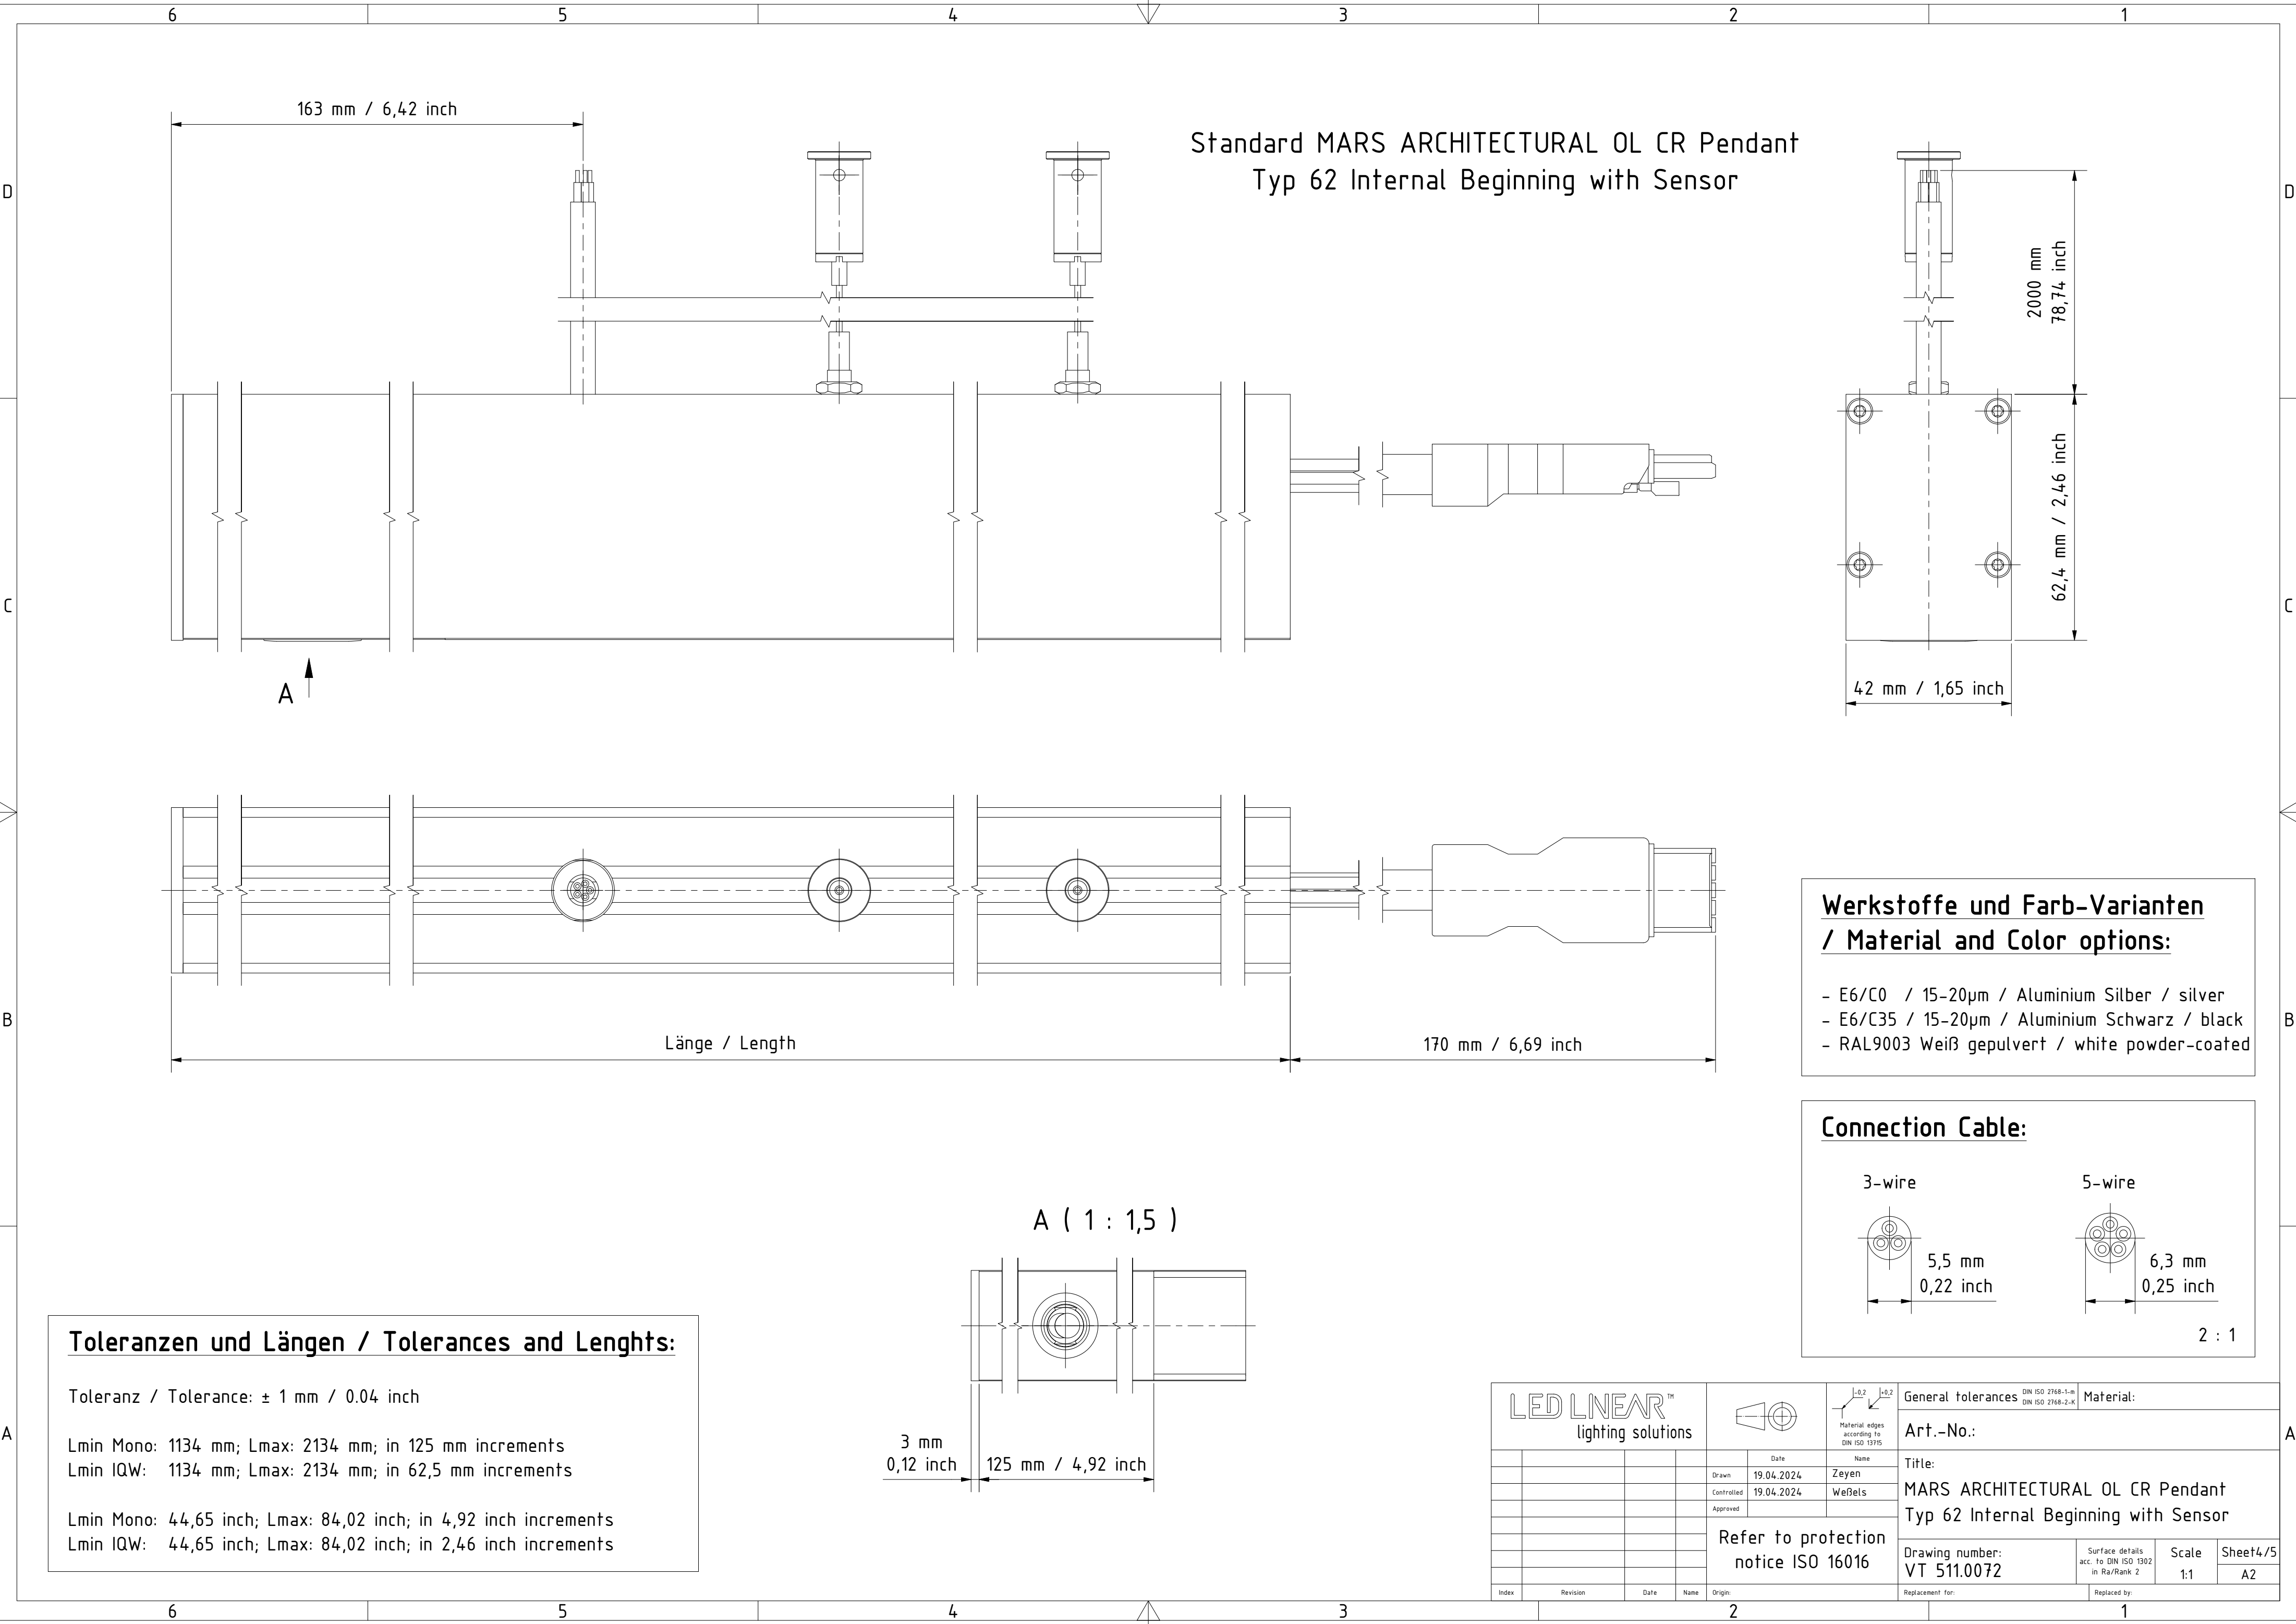
Lmin Mono: 1009 mm; Lmax: 2009 mm; in 125 mm increments
Lmin IQW: 1009 mm; Lmax: 2009 mm; in 62,5 mm increments

Lmin Mono: 39,72 inch; Lmax: 79,09 inch; in 4,92 inch increments
Lmin IQW: 39,72 inch; Lmax: 79,09 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Drawn	19.04.2024	Zeyen	Art.-No.:				
				Controlled	19.04.2024	Weßels	Title:				
				Approved			MARS ARCHITECTURAL OL CR Pendant Typ 62 Internal End				
				Refer to protection notice ISO 16016			Drawing number: VT 511.0072		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/5 A2
Index	Revision	Date	Name	Origin:	Replacement for:			Replaced by:			

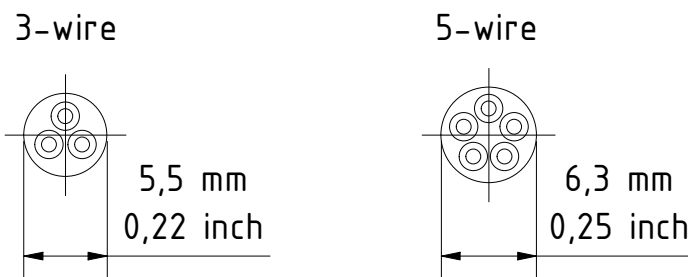


Standard MARS ARCHITECTURAL OL CR Pendant
Typ 62 Internal Beginning with Sensor

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:





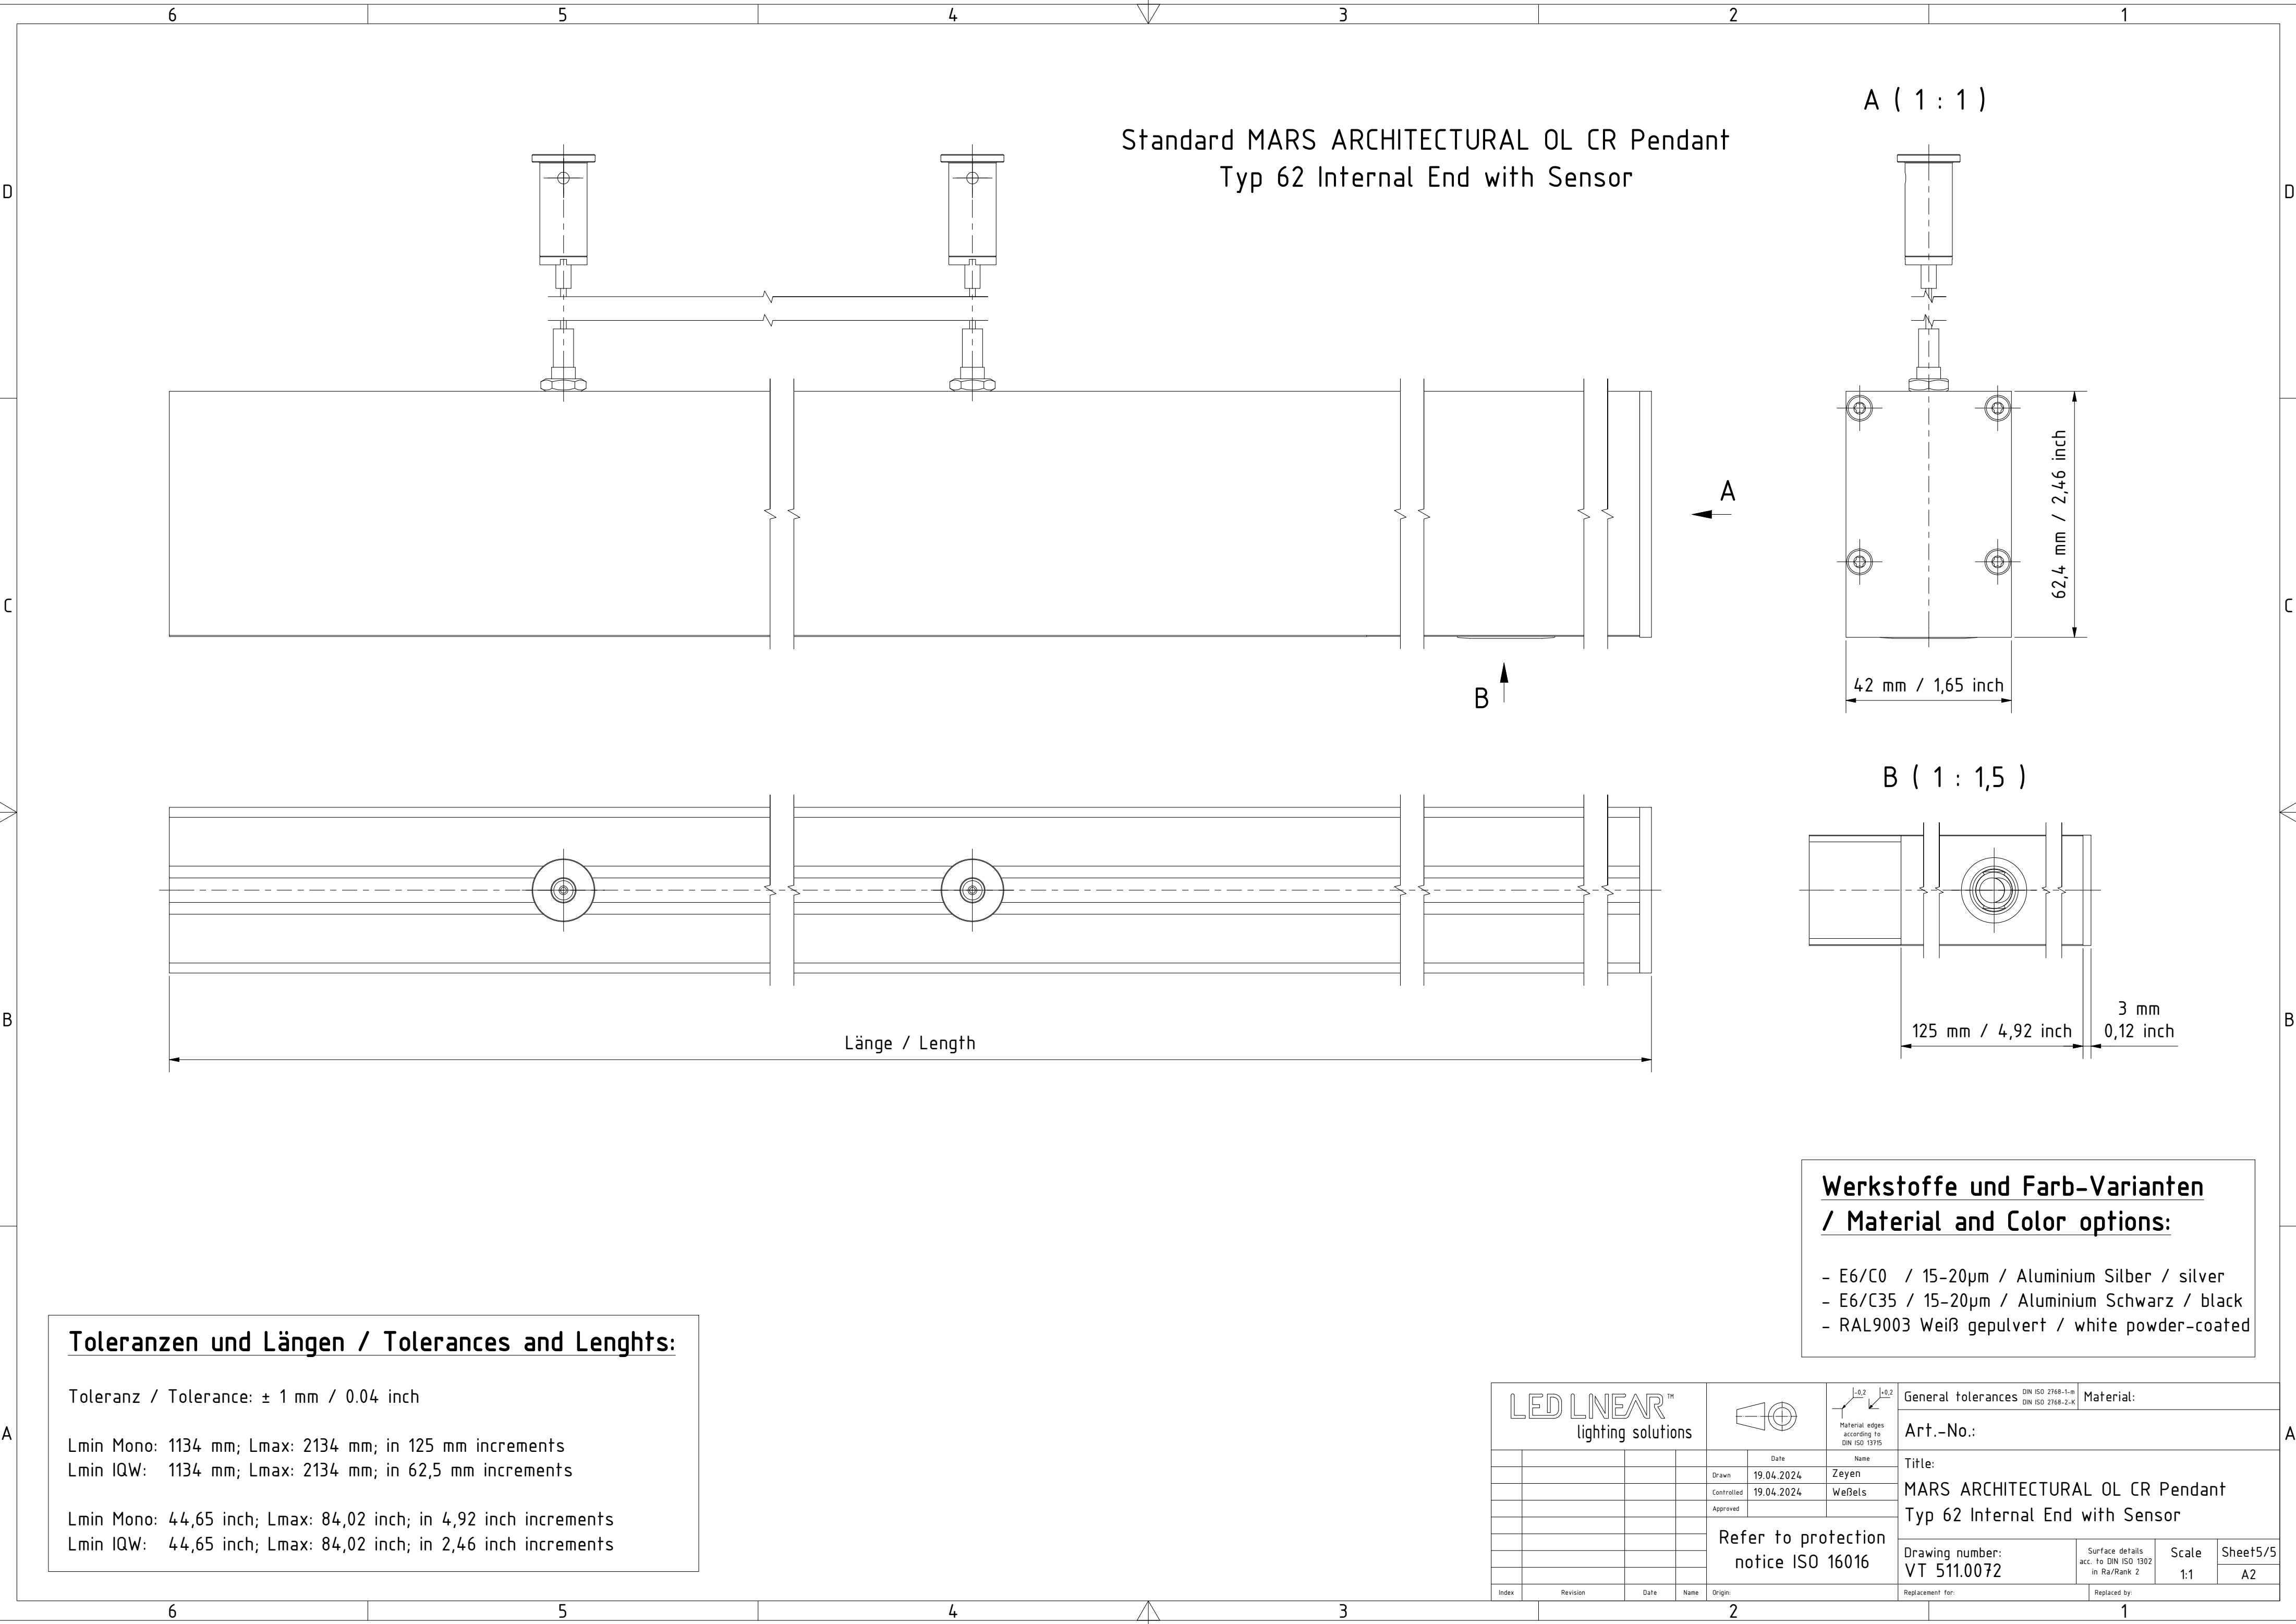
Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1134 mm; Lmax: 2134 mm; in 125 mm increments
Lmin IQW: 1134 mm; Lmax: 2134 mm; in 62,5 mm increments

Lmin Mono: 44,65 inch; Lmax: 84,02 inch; in 4,92 inch increments
Lmin IQW: 44,65 inch; Lmax: 84,02 inch; in 2,46 inch increments

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
					Date	Name	Art.-No.:					
					Drawn	19.04.2024	Zeyen	Title:				
					Controlled	19.04.2024	Weßels	MARS ARCHITECTURAL OL CR Pendant				
					Approved			Typ 62 Internal Beginning with Sensor				
					Refer to protection notice ISO 16016			Drawing number: VT 511.0072		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet4/5 A2
Index	Revision	Date	Name	Origin:				Replacement for:		Replaced by:		



Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 1134 mm; Lmax: 2134 mm; in 125 mm increments
Lmin IQW: 1134 mm; Lmax: 2134 mm; in 62,5 mm increments

Lmin Mono: 44,65 inch; Lmax: 84,02 inch; in 4,92 inch increments
Lmin IQW: 44,65 inch; Lmax: 84,02 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Drawn	19.04.2024	Zeyen		Art.-No.:			
				Controlled	19.04.2024	Weßels		Title:			
				Approved				MARS ARCHITECTURAL OL CR Pendant Typ 62 Internal End with Sensor			
				Refer to protection notice ISO 16016				Drawing number: VT 511.0072			
								Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet5/5 A2
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:		