


Standard MARS ARCHITECTURAL OL CR Recessed
Typ 62 Internal Beginning

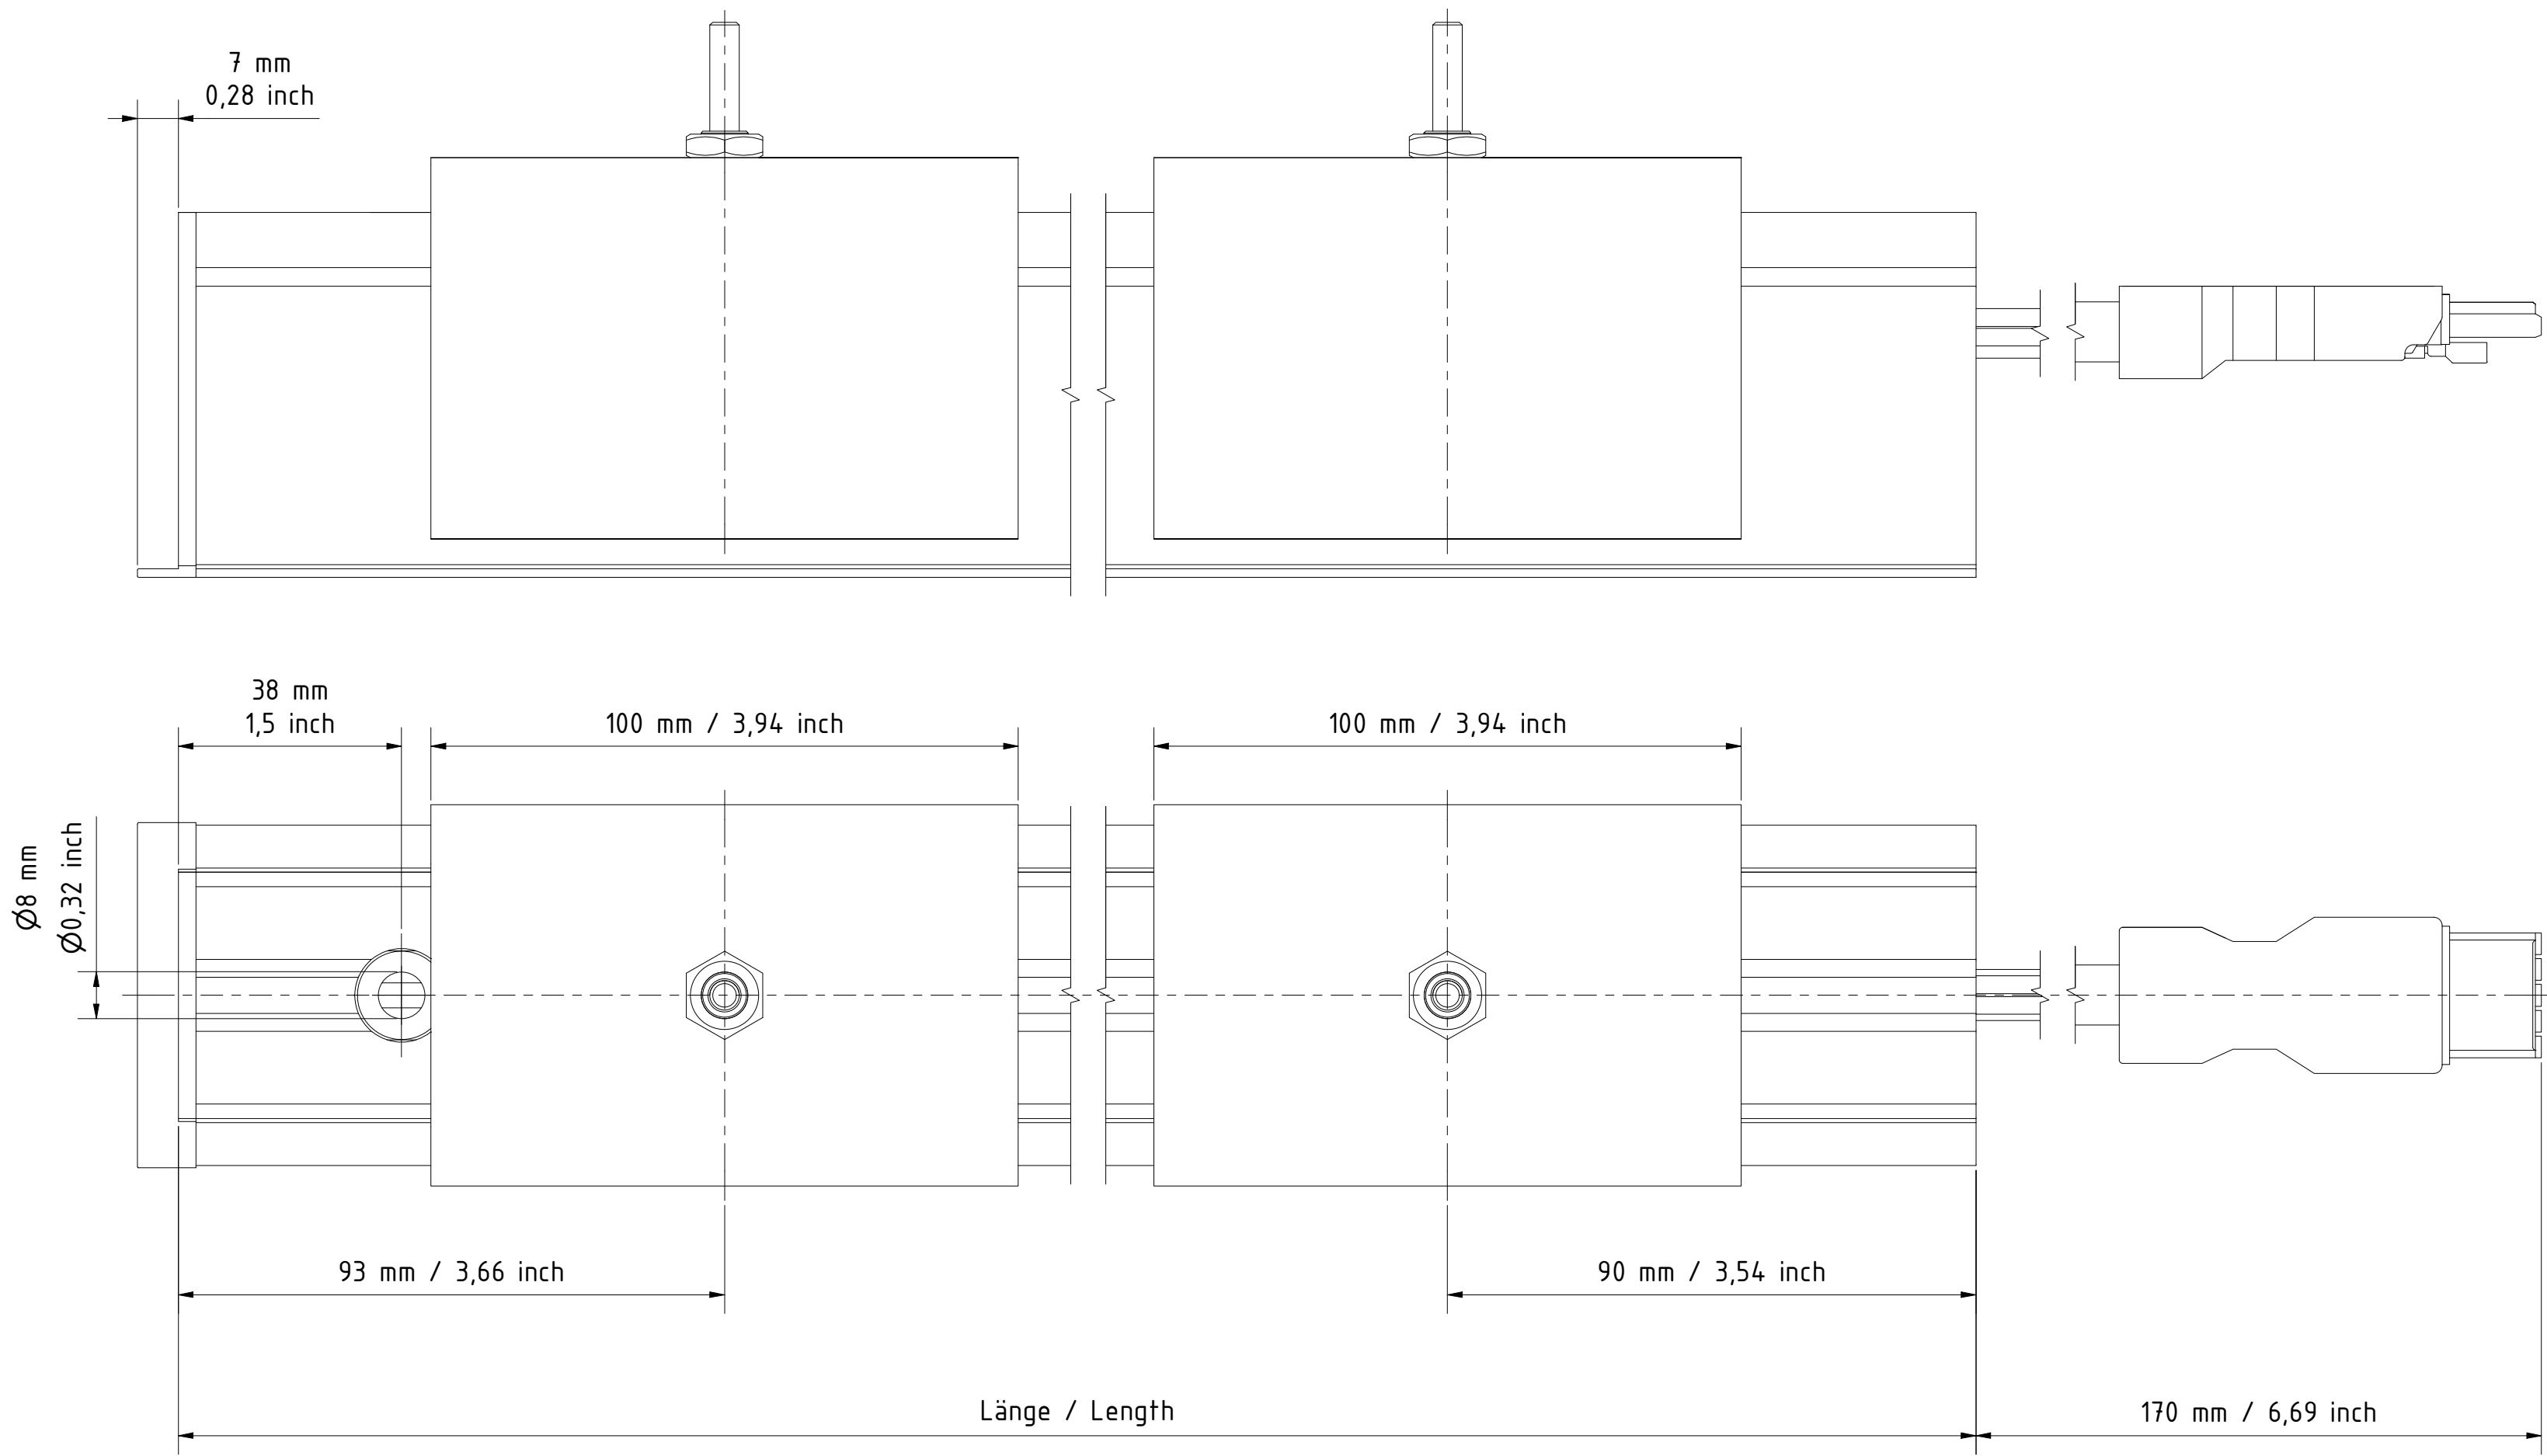

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$


Lmin Mono: 1009 mm; Lmax: 2009 mm; in 125 mm increments
Lmin IQW: 1009 mm; Lmax: 2009 mm; in 62,5 mm increments


Lmin Mono: 39,72 inch; Lmax: 79,09 inch; in 4,92 inch increments
Lmin IQW: 39,72 inch; Lmax: 79,09 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
						Material edges according to DIN ISO 13715		Art.-No.:				
				Date	Name	Title:						
				Drawn	19.04.2024	Zeyen		MARS ARCHITECTURAL OL CR Recessed				
				Controlled	19.04.2024	Weßels		Typ 62 Internal Beginning				
				Approved								
				Refer to protection notice ISO 16016								
										Drawing number: VT 511.0073		
										Surface details acc. to DIN ISO 1302 in Ra/Rank 2		
										Scale 1:1		
										Sheet 1/5 A2		
Index	Revision	Date	Name	Origin:	Replacement for:						Replaced by:	

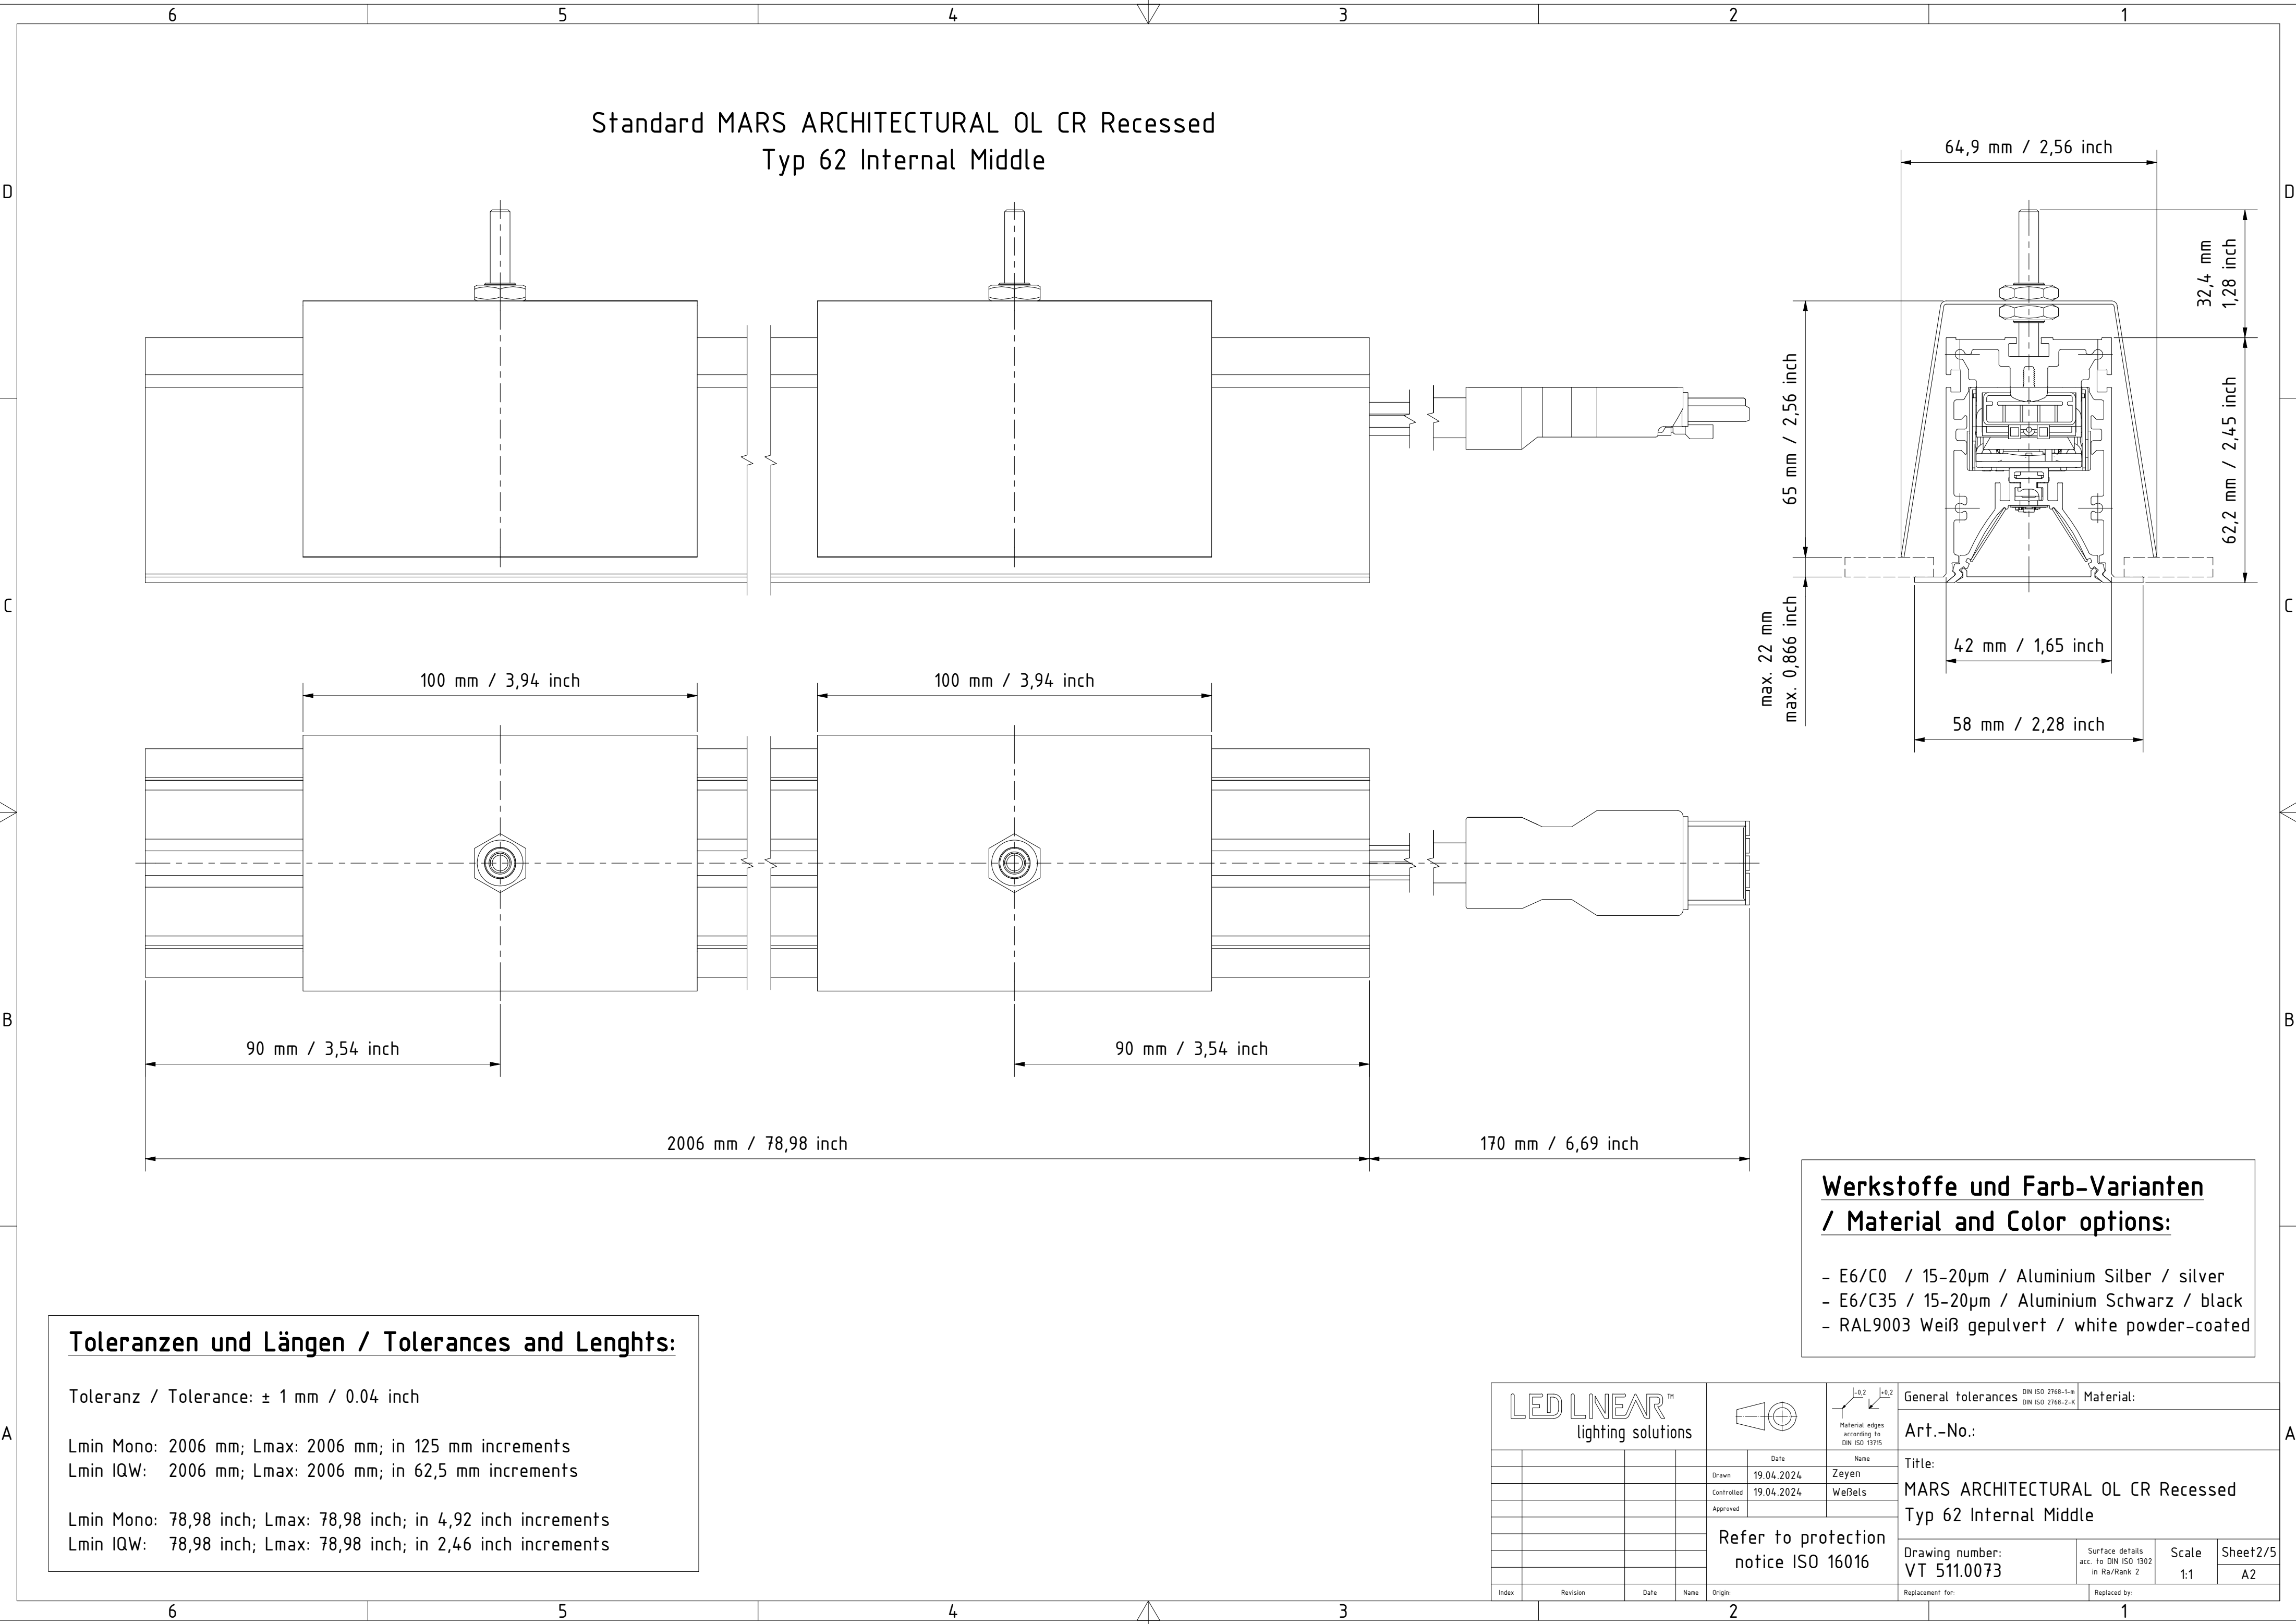

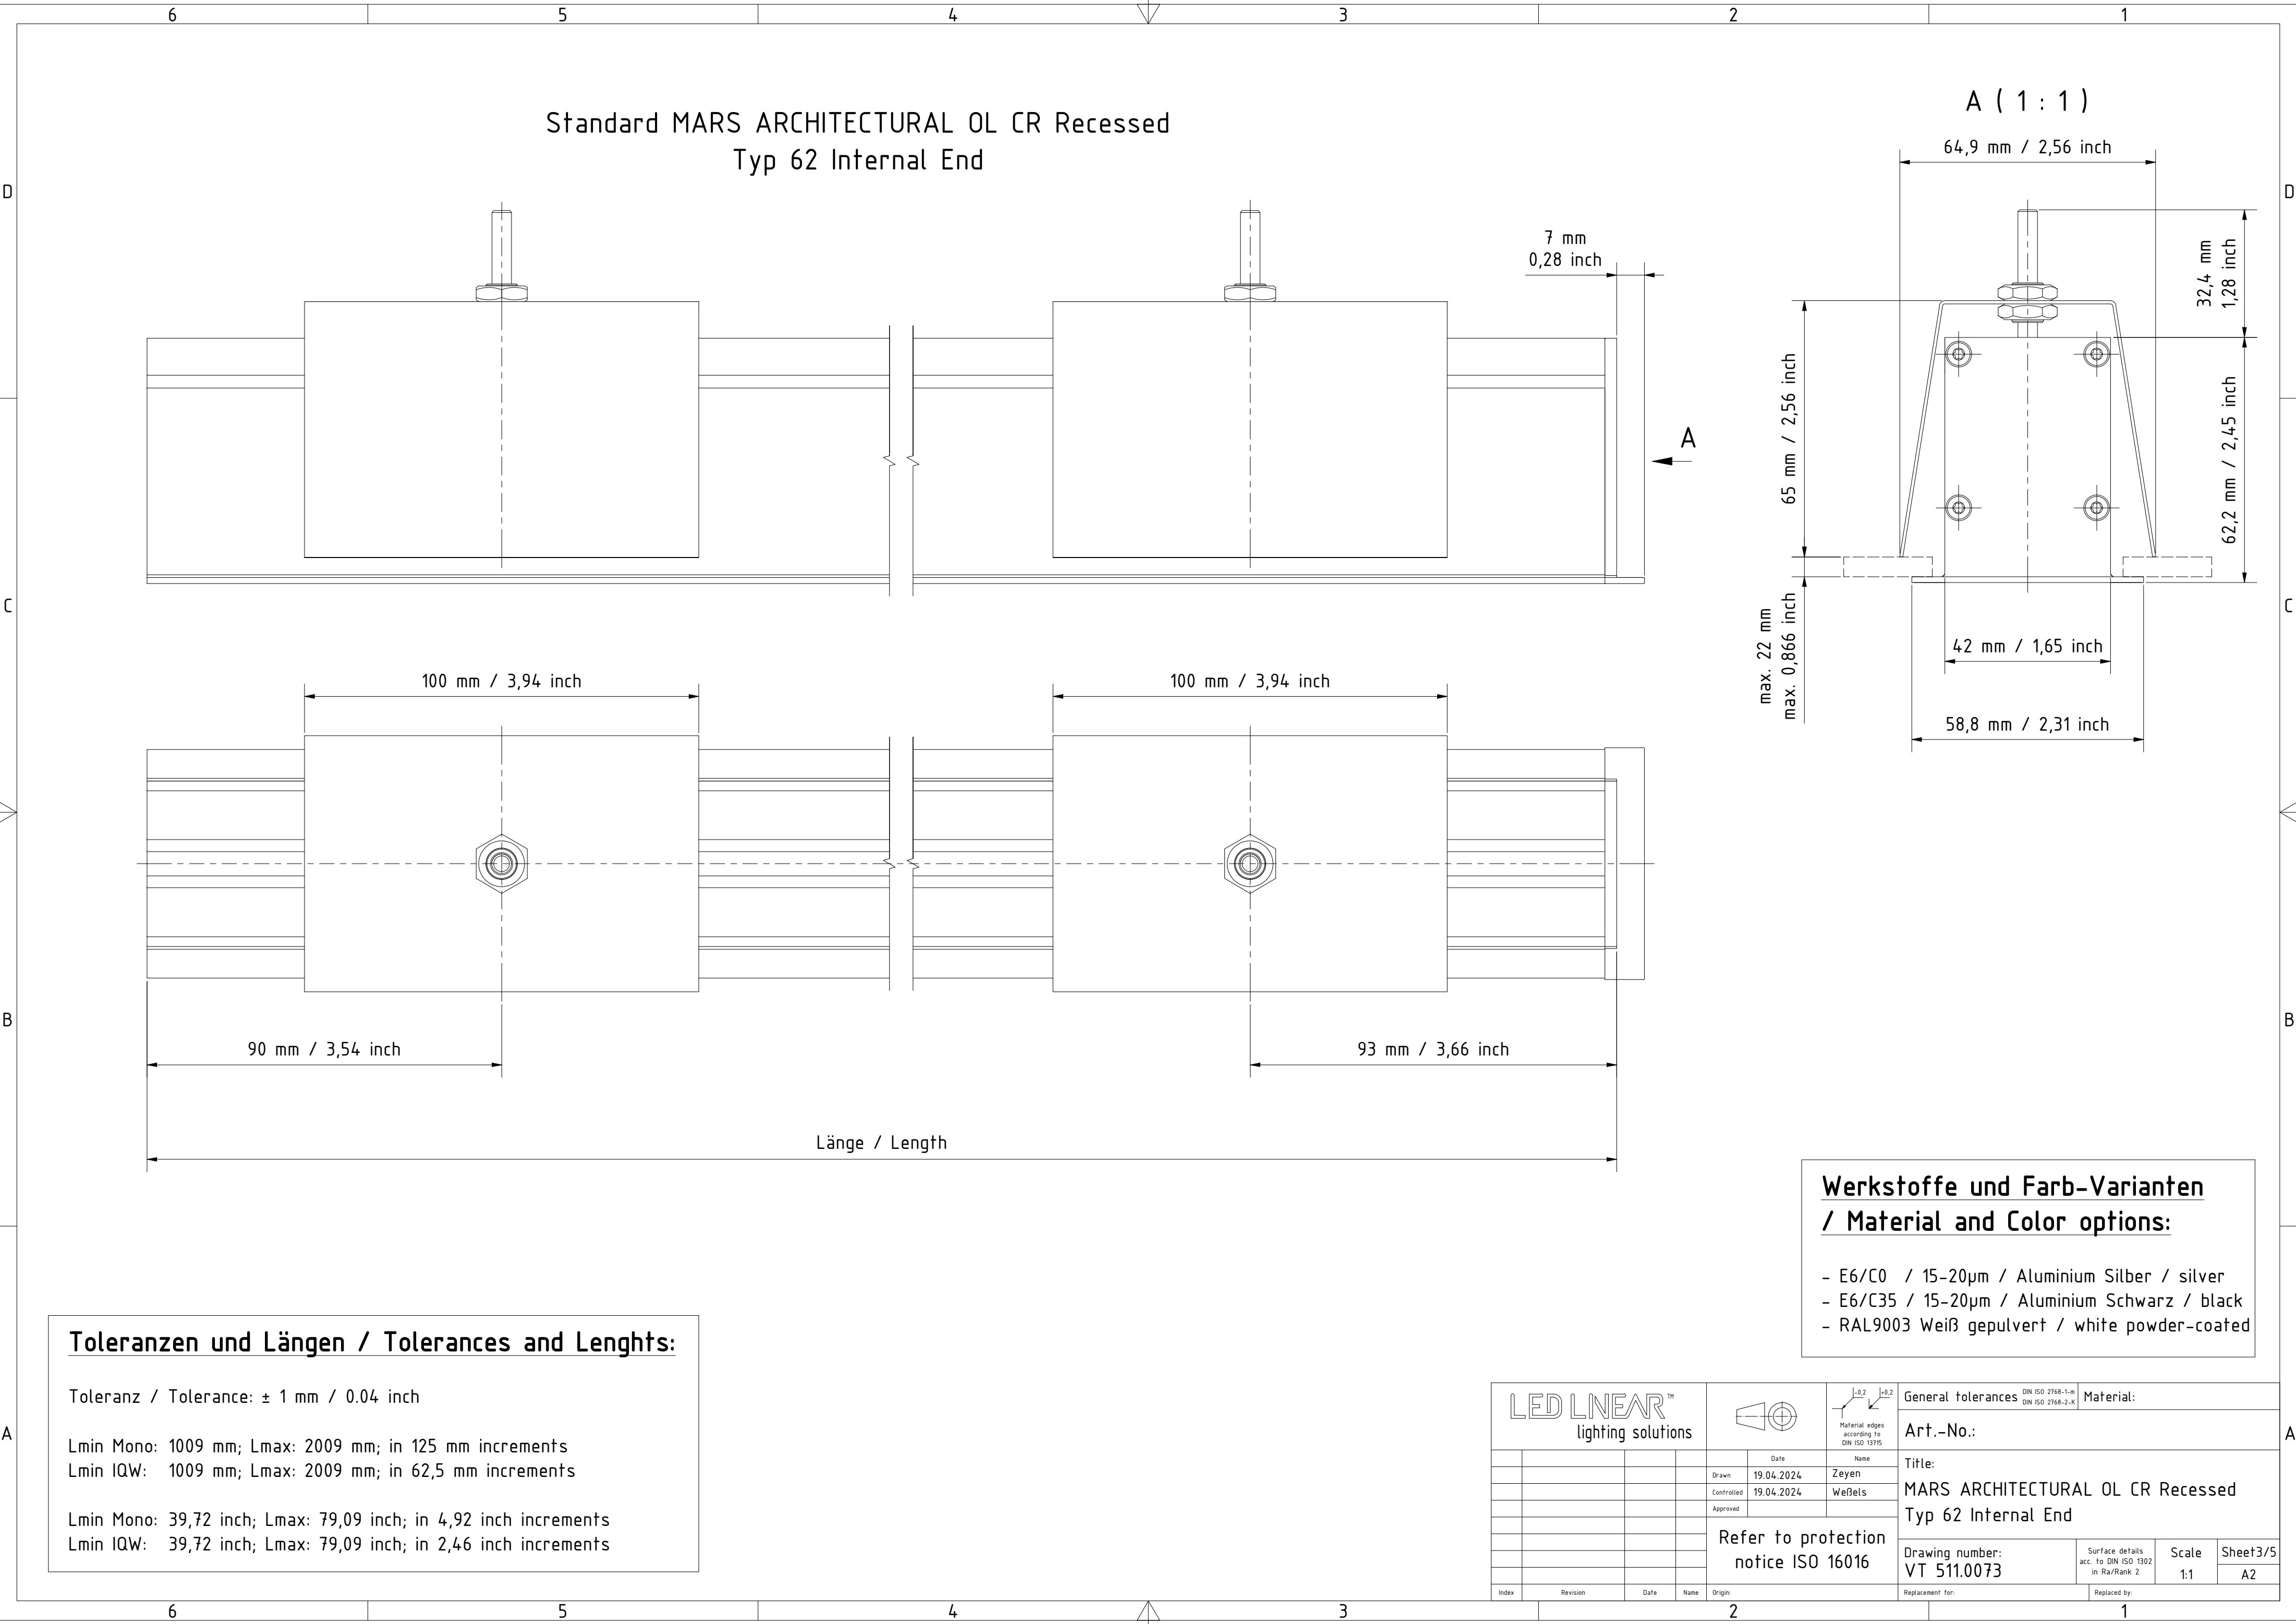

Standard MARS ARCHITECTURAL OL CR Recessed
Typ 62 Internal End

A (1 : 1)

64,9 mm / 2,56 inch

32,4 mm
1,28 inch

62,2 mm / 2,45 inch

65 mm / 2,56 inch

max. 22 mm
max. 0,866 inch

42 mm / 1,65 inch

58,8 mm / 2,31 inch

7 mm
0,28 inch

A

100 mm / 3,94 inch

100 mm / 3,94 inch

90 mm / 3,54 inch

93 mm / 3,66 inch

Länge / Length

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1009 mm; Lmax: 2009 mm; in 125 mm increments


Lmin IQW: 1009 mm; Lmax: 2009 mm; in 62,5 mm increments

Lmin Mono: 39,72 inch; Lmax: 79,09 inch; in 4,92 inch increments


Lmin IQW: 39,72 inch; Lmax: 79,09 inch; in 2,46 inch increments

Werkstoffe und Farb-Varianten
/ Material and Color options:

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
								Art.-No.:			
					Date	Name	Title:				
				Drawn	19.04.2024	Zeyen	MARS ARCHITECTURAL OL CR Recessed				
				Controlled	19.04.2024	Weßels	Typ 62 Internal End				
				Approved			Drawing number:				
				Refer to protection notice ISO 16016			VT 511.0073		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/5 A2
Index	Revision	Date	Name	Origin:				Replacement for:		Replaced by:	

Standard MARS ARCHITECTURAL OL CR Recessed
Typ 62 Internal Beginning with Sensor

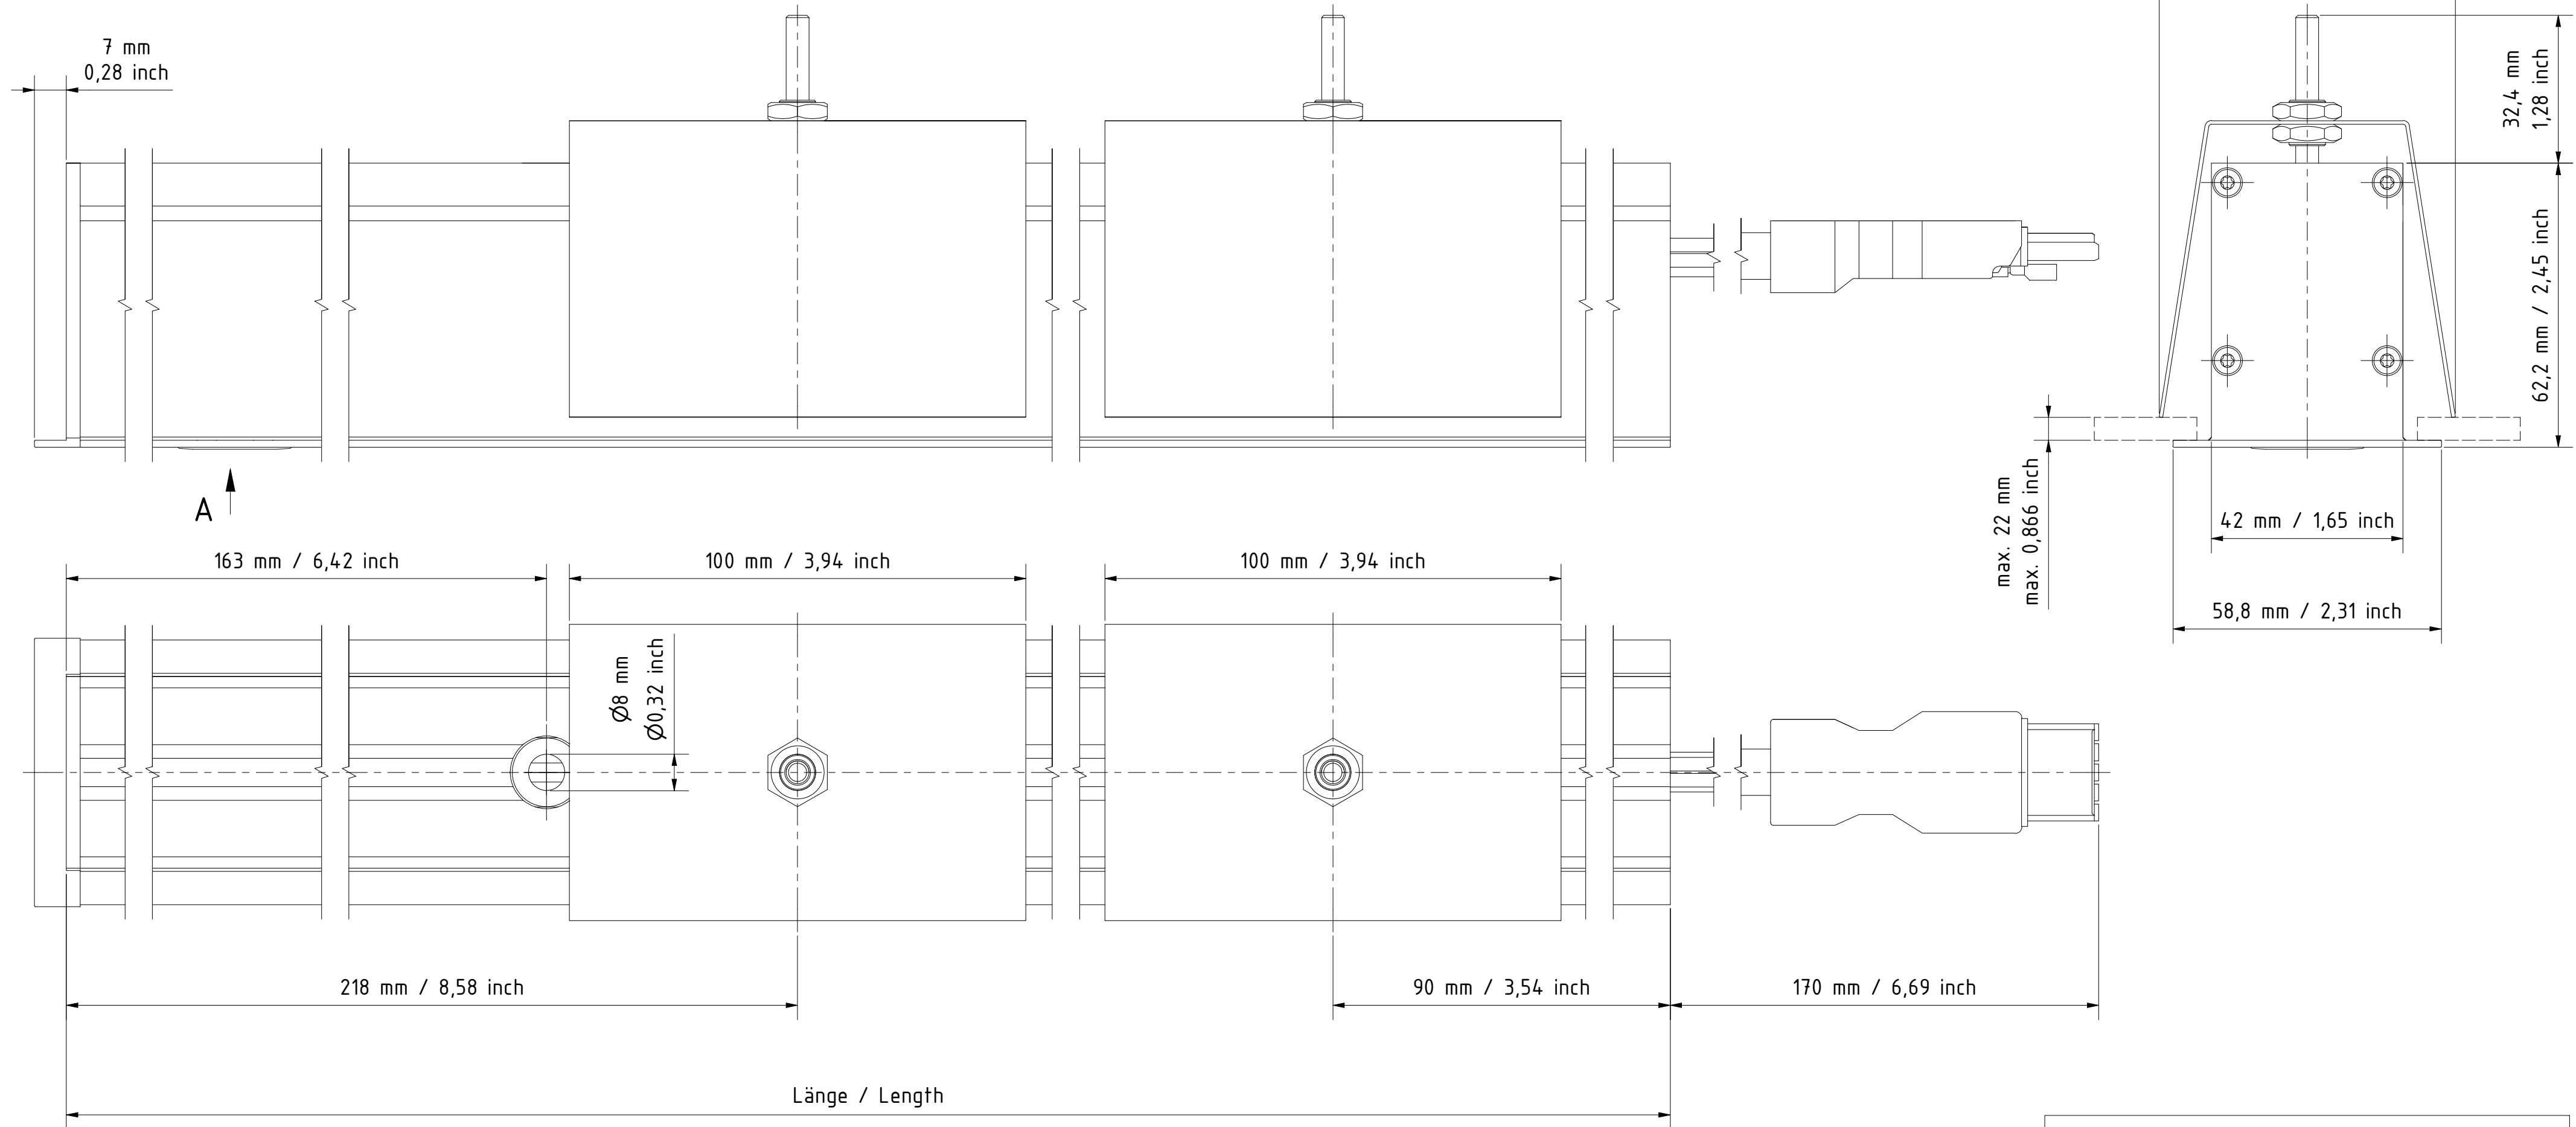


Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1134 mm; Lmax: 2134 mm; in 125 mm increments
Lmin IQW: 1134 mm; Lmax: 2134 mm; in 62,5 mm increments


Lmin Mono: 44,65 inch; Lmax: 84,02 inch; in 4,92 inch increments
Lmin IQW: 44,65 inch; Lmax: 84,02 inch; in 2,46 inch increments

A (1 : 1,5)



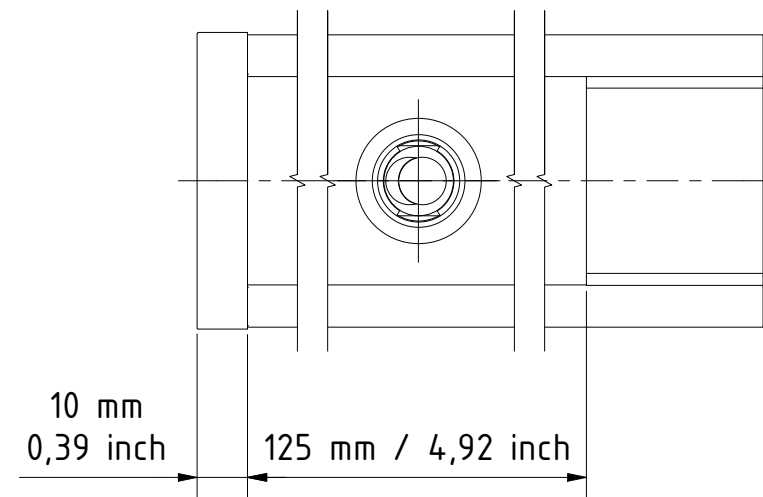


**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13175		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K				Material:							
				Date		Name		Art.-No.:											
				Drawn		19.04.2024		Zeyen		Title: MARS ARCHITECTURAL OL CR Recessed Typ 62 Internal Beginning with Sensor									
				Controlled		19.04.2024		Weßels											
				Approved															
										Refer to protection notice ISO 16016									
Index		Revision		Date		Name		Origin:		Drawing number: VT 511.0073				Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1		Sheet4/5 A2	
Replacement for:										Replaced by:									

Standard MARS ARCHITECTURAL OL CR Recessed
Typ 62 Internal End with Sensor

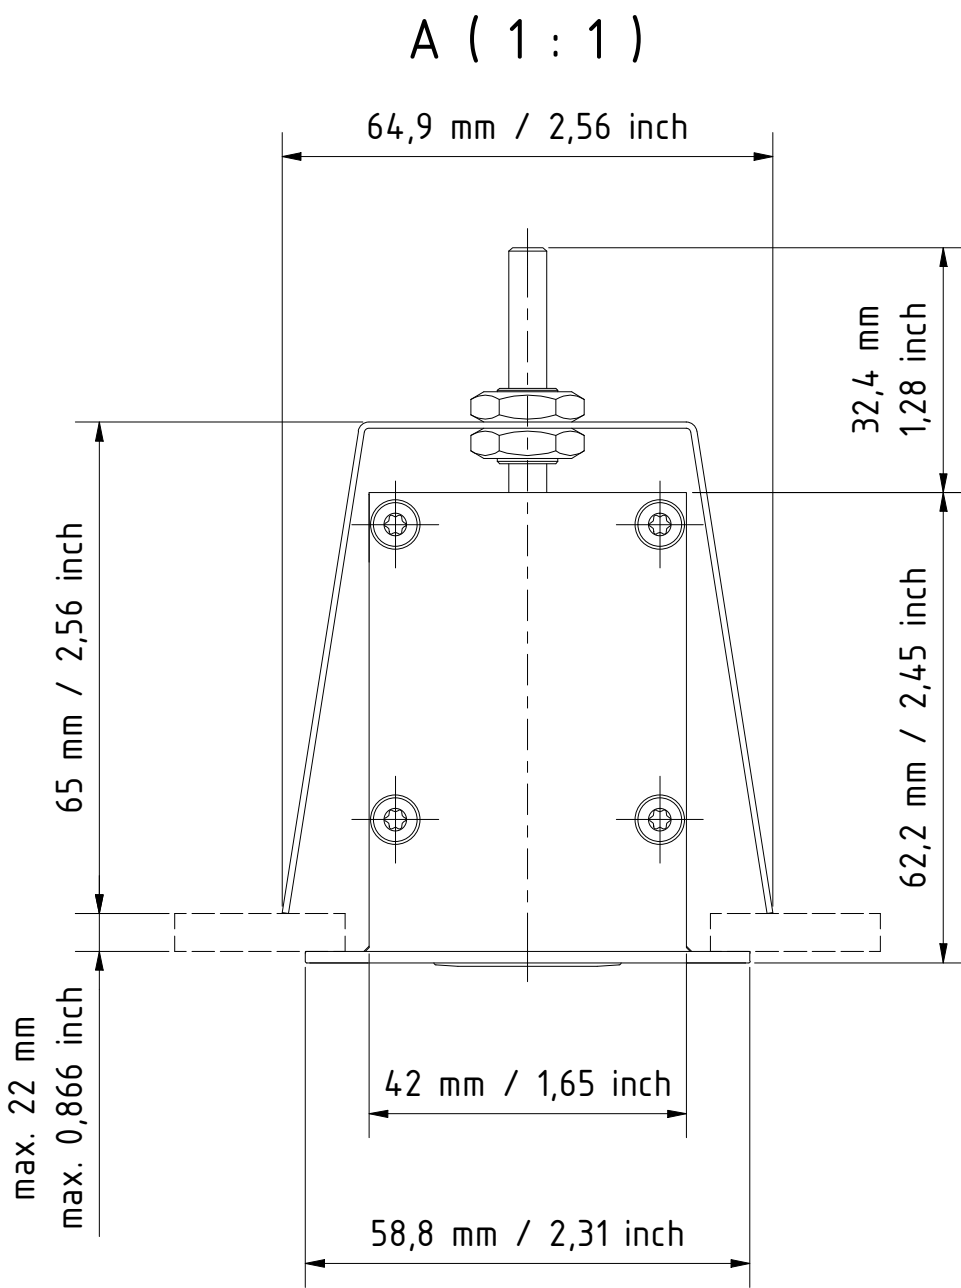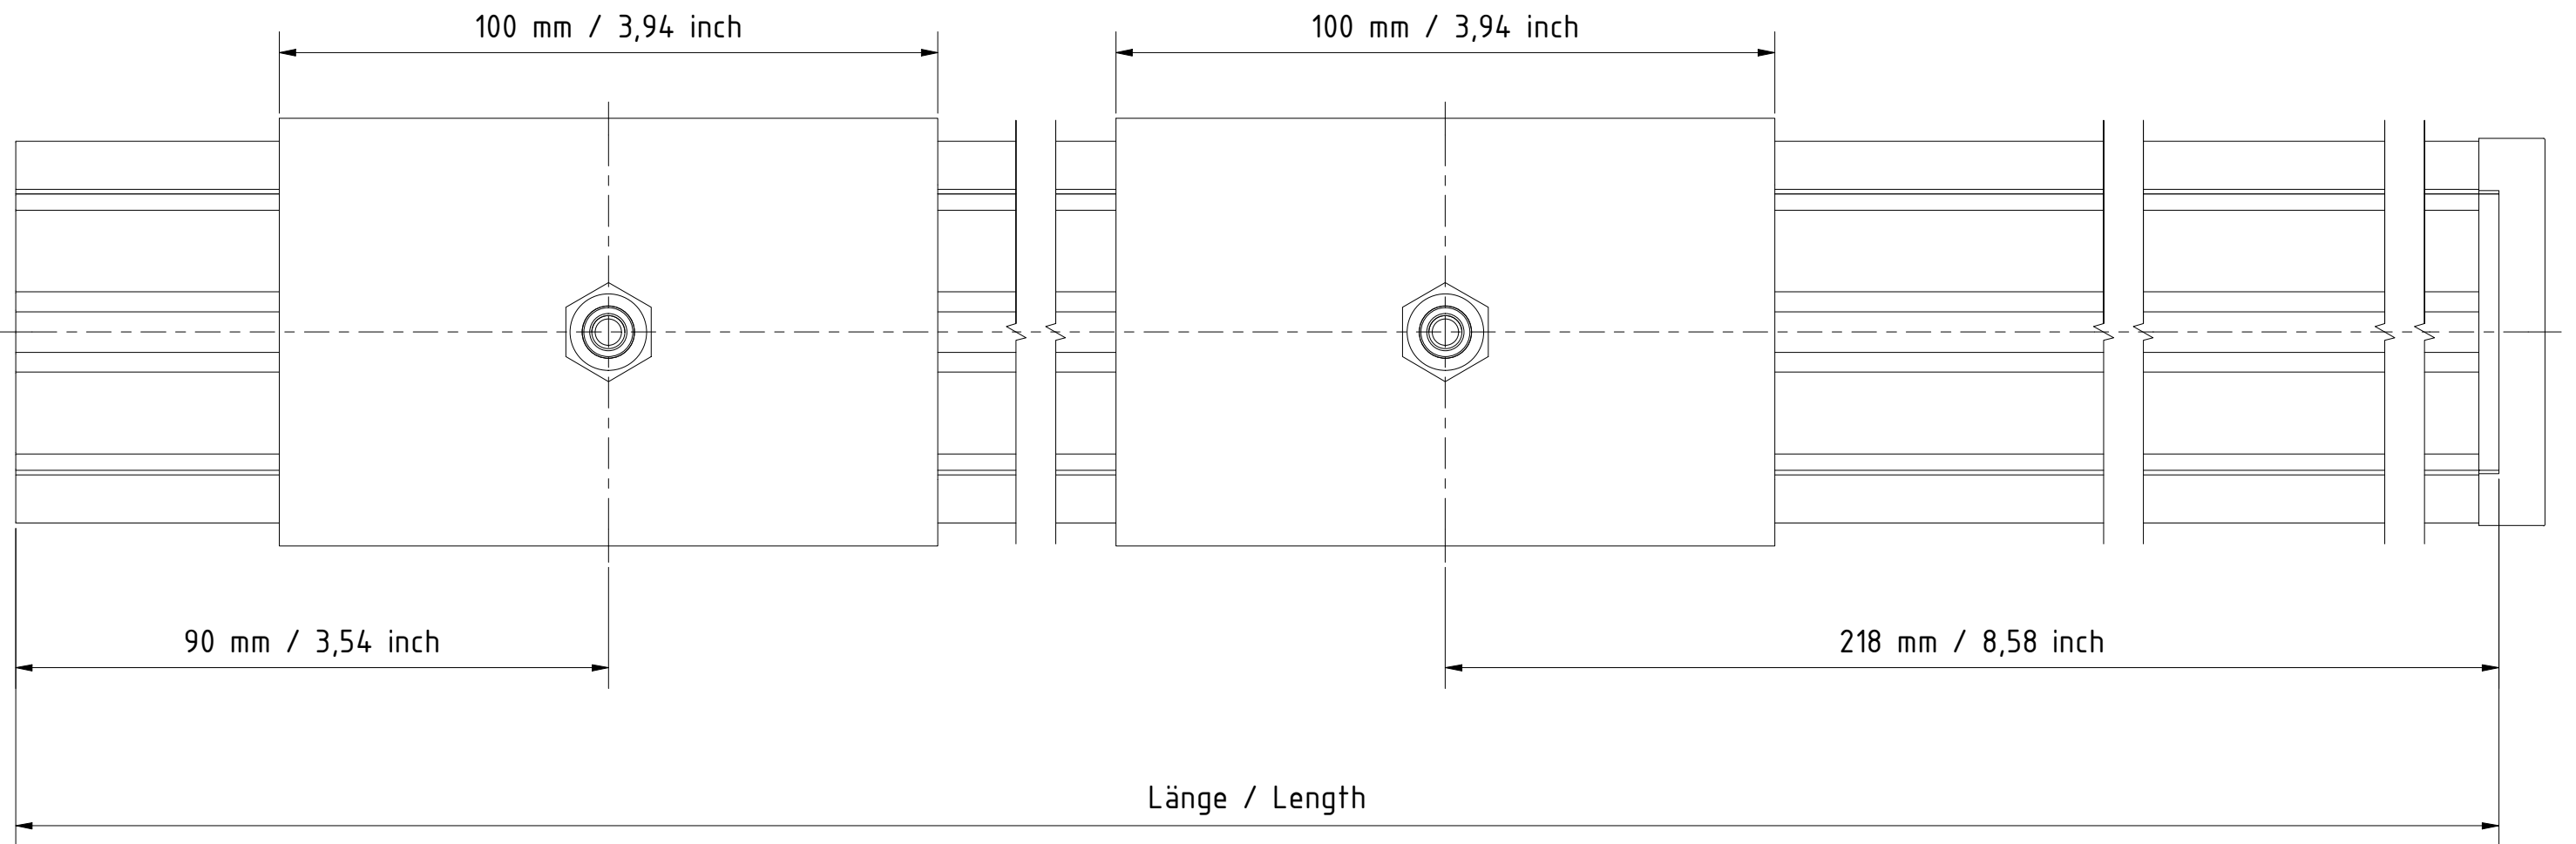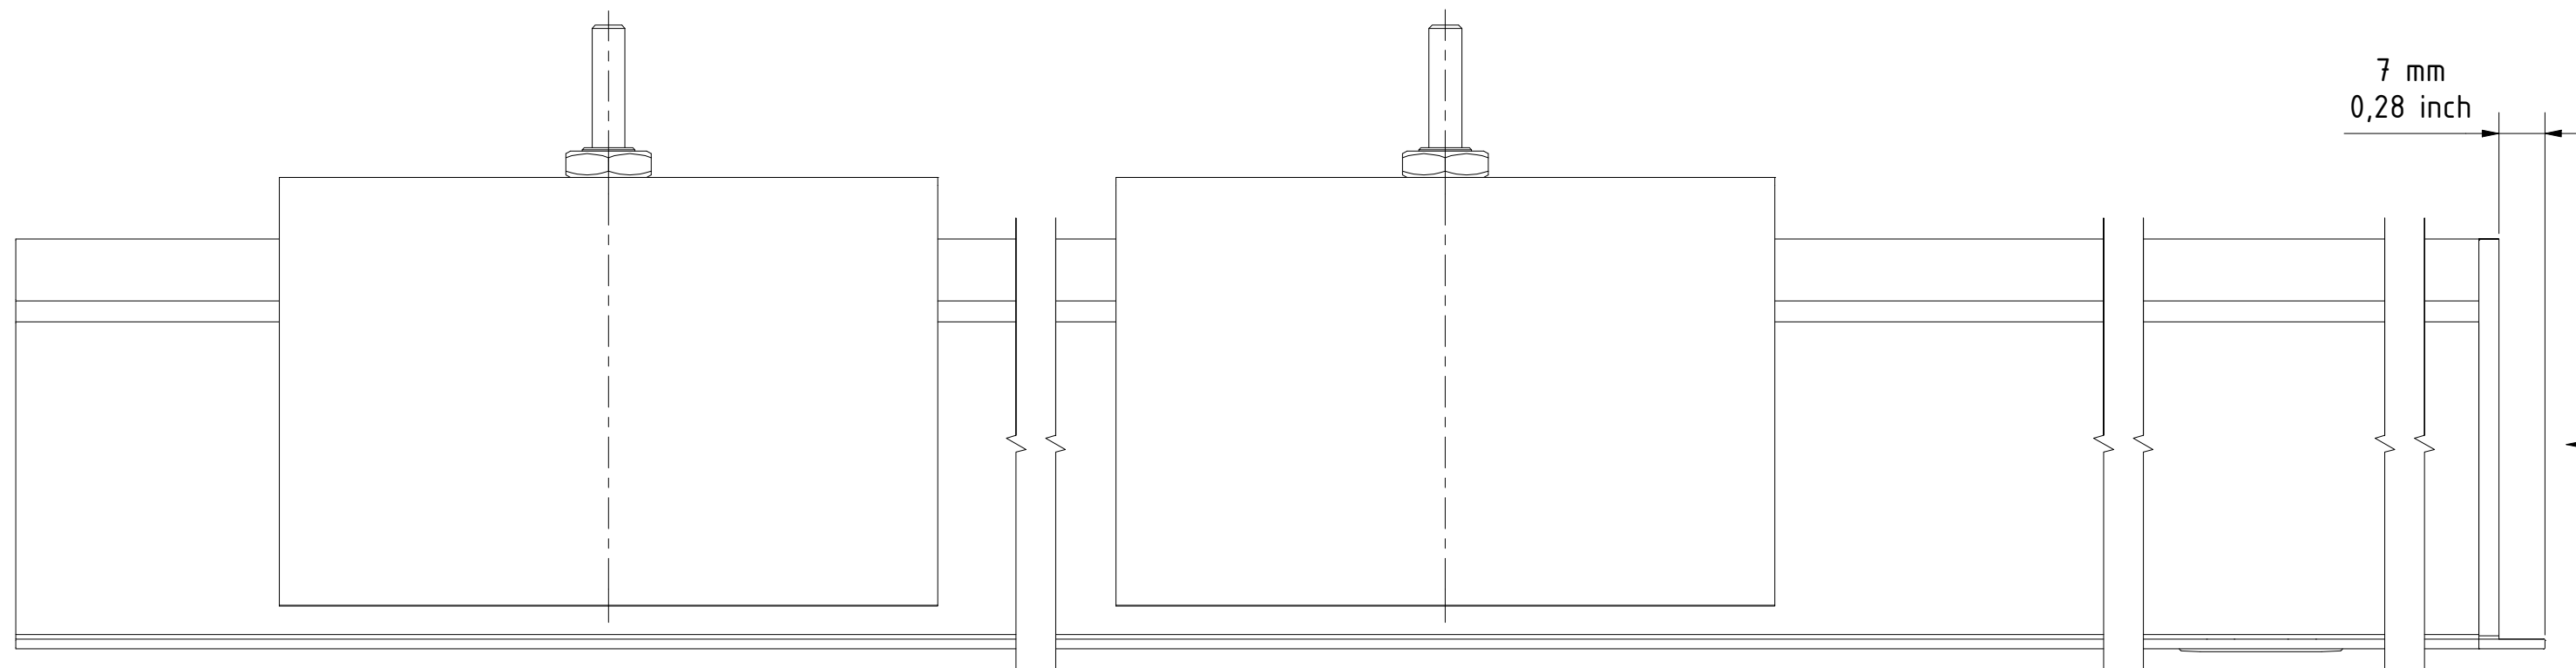

B (1 : 1,5)

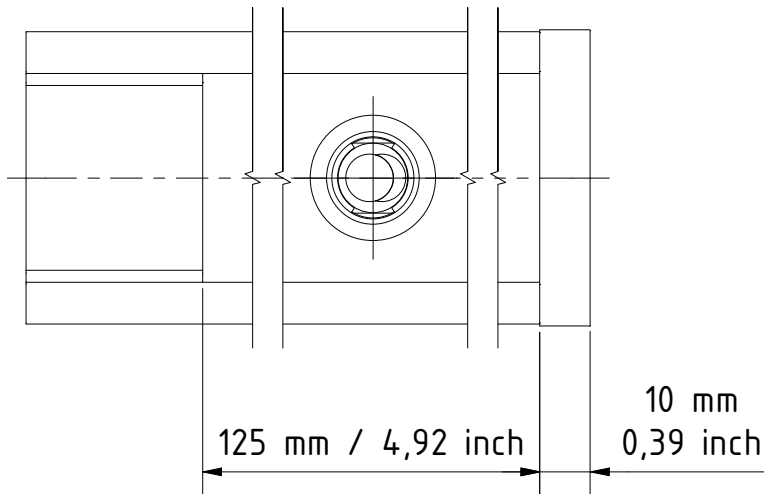

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1134 mm; Lmax: 2134 mm; in 125 mm increments
Lmin IQW: 1134 mm; Lmax: 2134 mm; in 62,5 mm increments

Lmin Mono: 44,65 inch; Lmax: 84,02 inch; in 4,92 inch increments
Lmin IQW: 44,65 inch; Lmax: 84,02 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:				
						Material edges according to DIN ISO 13715		Art.-No.:						
				Date		Name		Title:						
				Drawn	19.04.2024	Zeyen		MARS ARCHITECTURAL OL CR Recessed						
				Controlled	19.04.2024	Weßels		Typ 62 Internal End with Sensor						
				Approved				Drawing number: VT 511.0073						
				Refer to protection notice ISO 16016			Surface details acc. to DIN ISO 1302 in Ra/Rank 2					Scale 1:1	Sheet5/5	
							A2							
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:					