
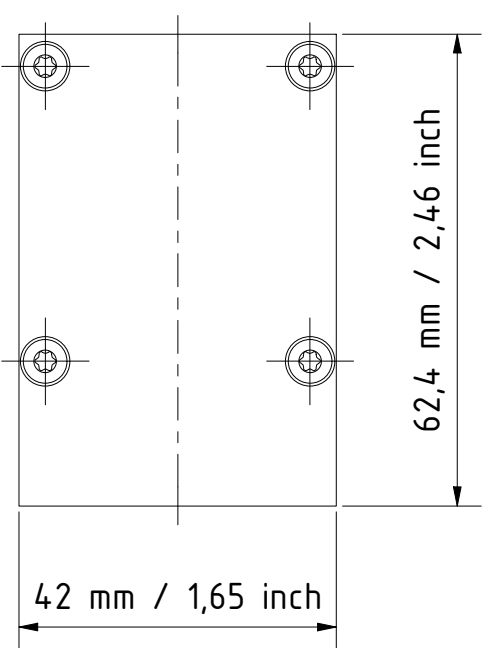


Standard MARS ARCHITECTURAL OL CR Surface
Typ 62 Internal Beginning

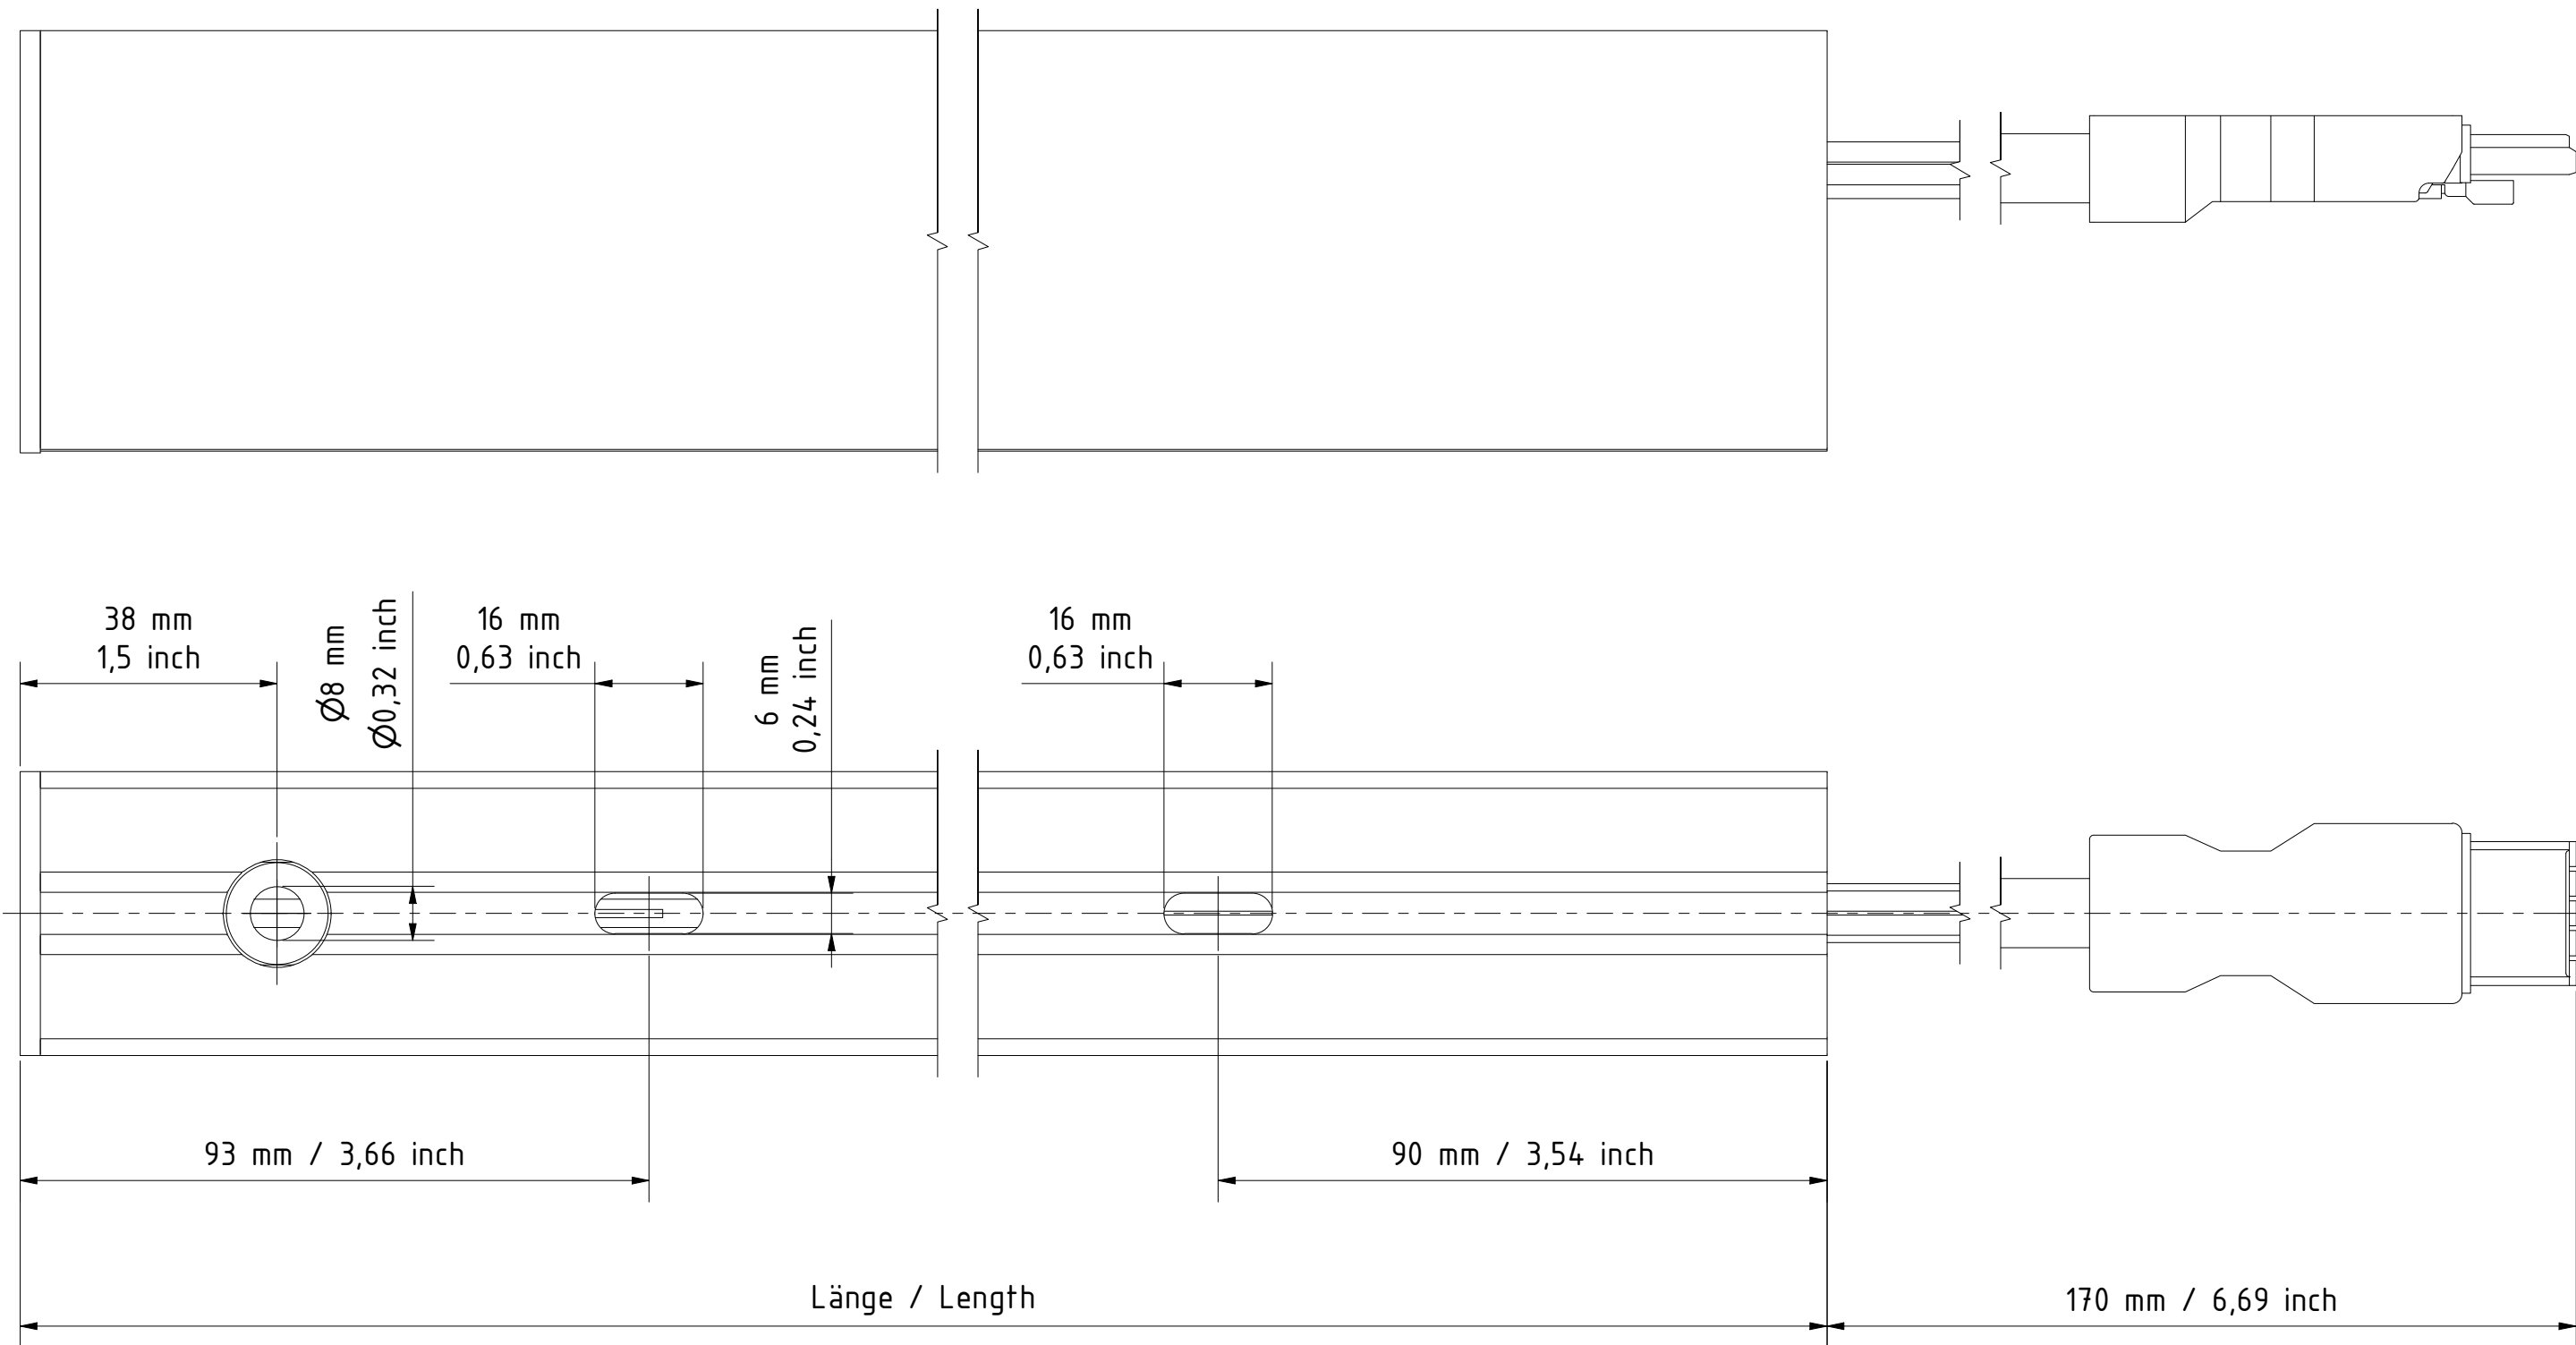

Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1009 mm; Lmax: 2009 mm; in 125 mm increments
Lmin IQW: 1009 mm; Lmax: 2009 mm; in 62,5 mm increments



Lmin Mono: 39,72 inch; Lmax: 79,09 inch; in 4,92 inch increments
Lmin IQW: 39,72 inch; Lmax: 79,09 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13915		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:				
				Drawn	Date 19.04.2024	Name Zeyen		Art.-No.:						
				Controlled	19.04.2024	Weßels		Title:						
				Approved				MARS ARCHITECTURAL OL CR Surface Typ 62 Internal Beginning						
				Refer to protection notice ISO 16016						Drawing number: VT 511.0071		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet 1/5 A2
Index	Revision	Date	Name	Origin:	Replacement for:						Replaced by:			

Standard MARS ARCHITECTURAL OL CR Surface
Typ 62 Internal Middle

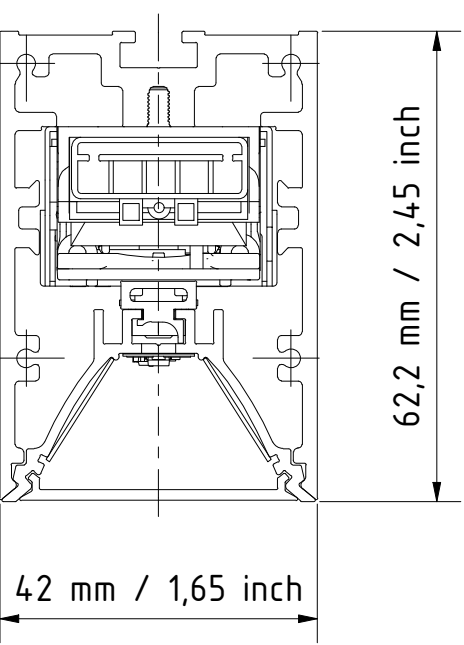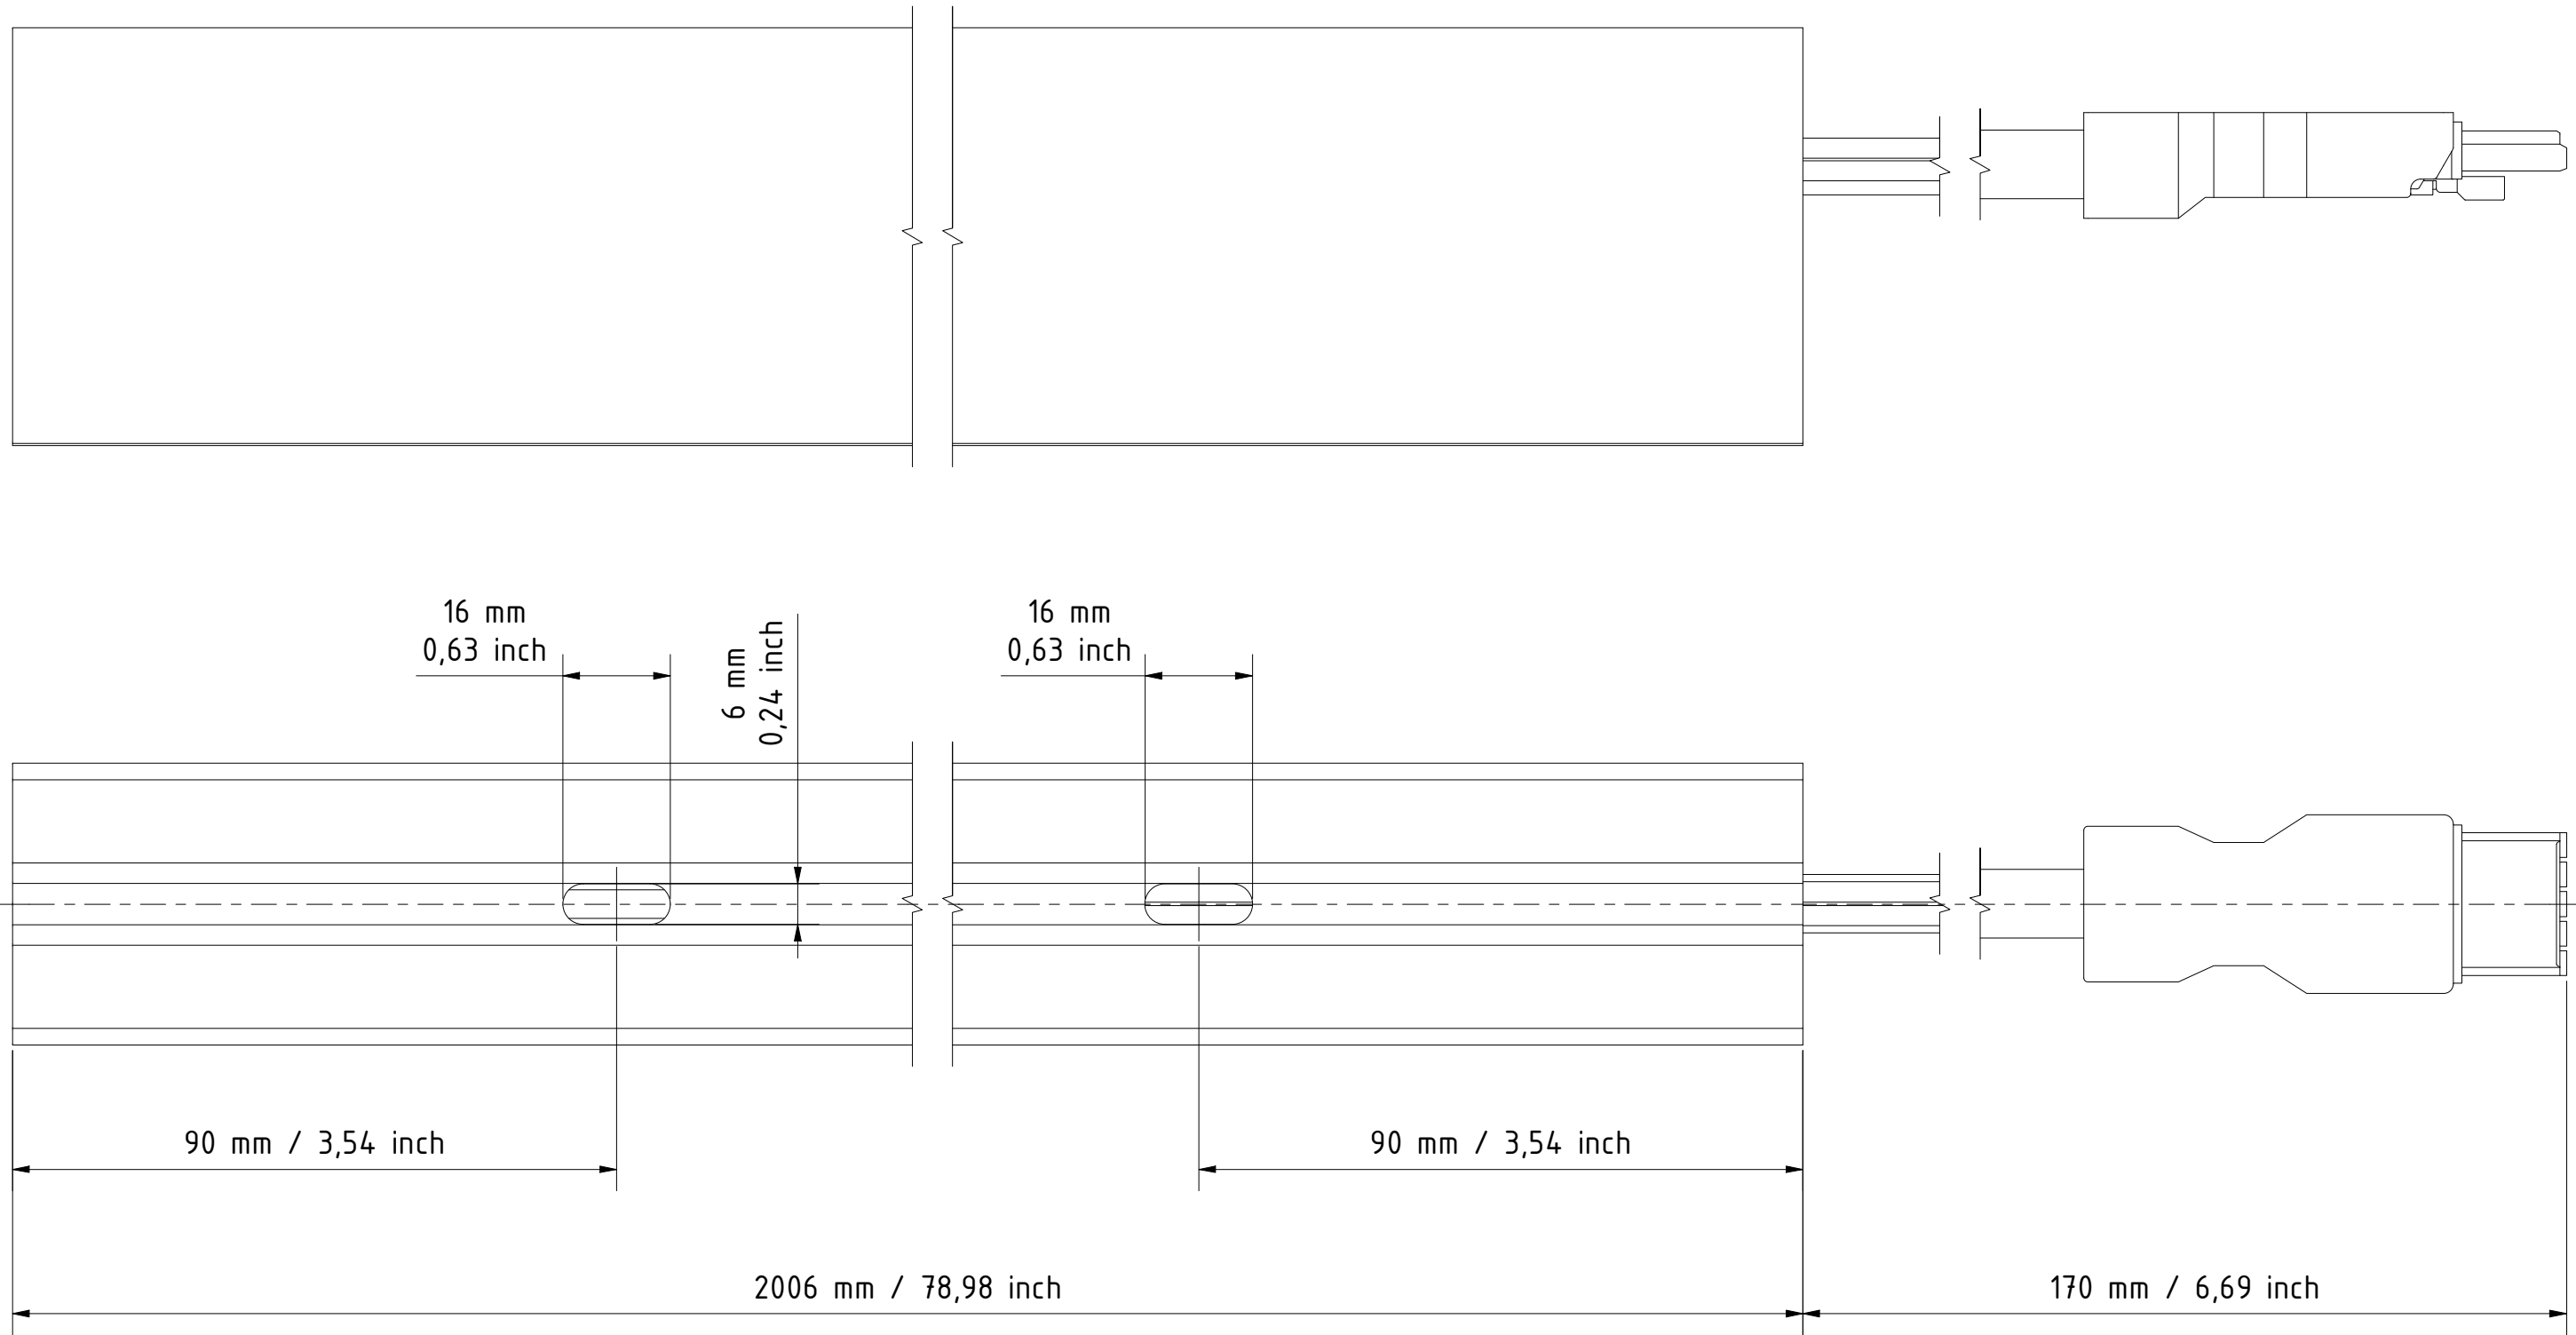

Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 2006 mm; Lmax: 2006 mm; in 125 mm increments
Lmin IQW: 2006 mm; Lmax: 2006 mm; in 62,5 mm increments

Lmin Mono: 78,98 inch; Lmax: 78,98 inch; in 4,92 inch increments
Lmin IQW: 78,98 inch; Lmax: 78,98 inch; in 2,46 inch increments


Werkstoffe und Farb-Varianten
/ Material and Color options:

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated



LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Drawn	19.04.2024	Zeyen	Art.-No.:				
				Controlled	19.04.2024	Weßels	Title:				
				Approved			MARS ARCHITECTURAL OL CR Surface Typ 62 Internal Middle				
				Refer to protection notice ISO 16016			Drawing number: VT 511.0071		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet2/5 A2
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:		

Standard MARS ARCHITECTURAL OL CR Surface
Typ 62 Internal End

A (1 : 1)

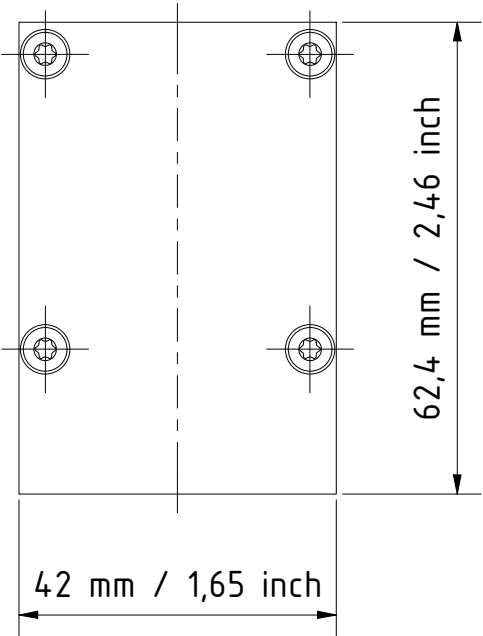

A

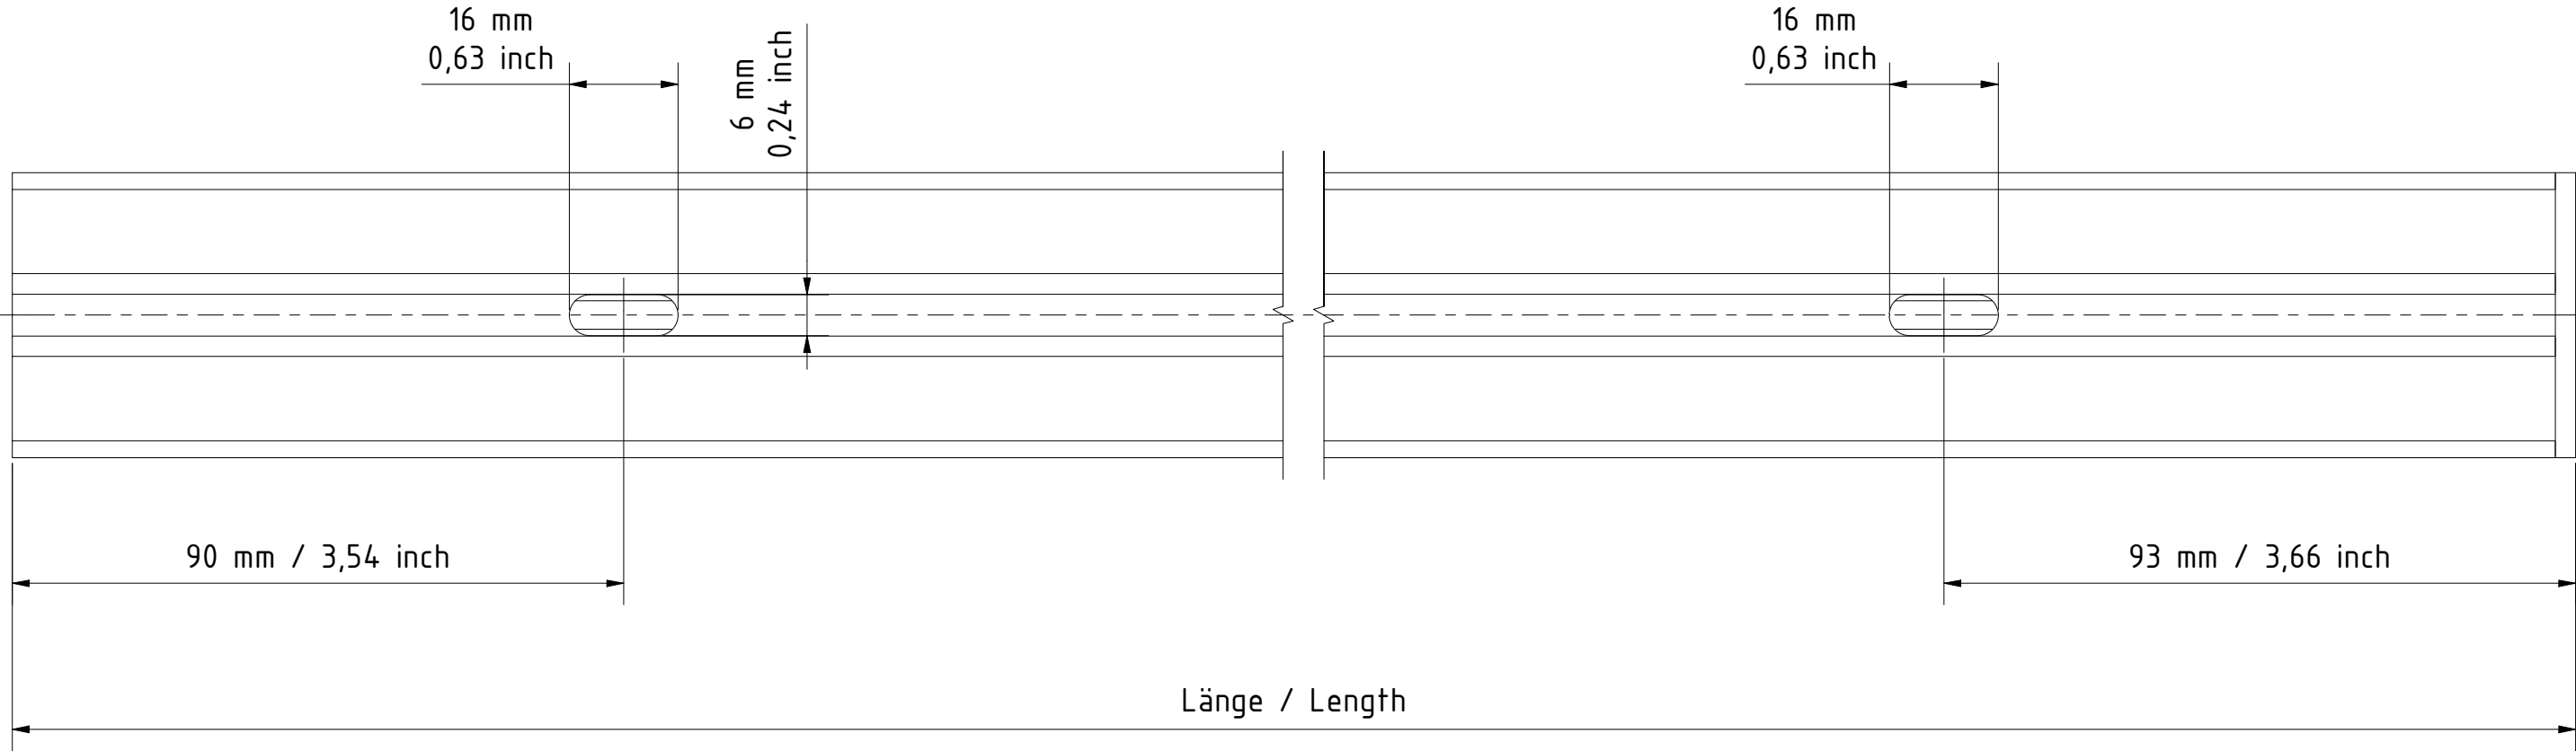

Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1009 mm; Lmax: 2009 mm; in 125 mm increments
Lmin IQW: 1009 mm; Lmax: 2009 mm; in 62,5 mm increments



Lmin Mono: 39,72 inch; Lmax: 79,09 inch; in 4,92 inch increments
Lmin IQW: 39,72 inch; Lmax: 79,09 inch; in 2,46 inch increments

Werkstoffe und Farb-Varianten
/ Material and Color options:


- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
					Date	Name	Art.-No.:				
				Drawn	19.04.2024	Zeyen	Title:				
				Controlled	19.04.2024	Weßels	MARS ARCHITECTURAL OL CR Surface				
				Approved			Typ 62 Internal End				
				Refer to protection notice ISO 16016			Drawing number: VT 511.0071		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/5 A2
Index	Revision	Date	Name	Origin:				Replacement for:		Replaced by:	

Standard MARS ARCHITECTURAL OL CR Surface
Typ 62 Internal Beginning with Sensor

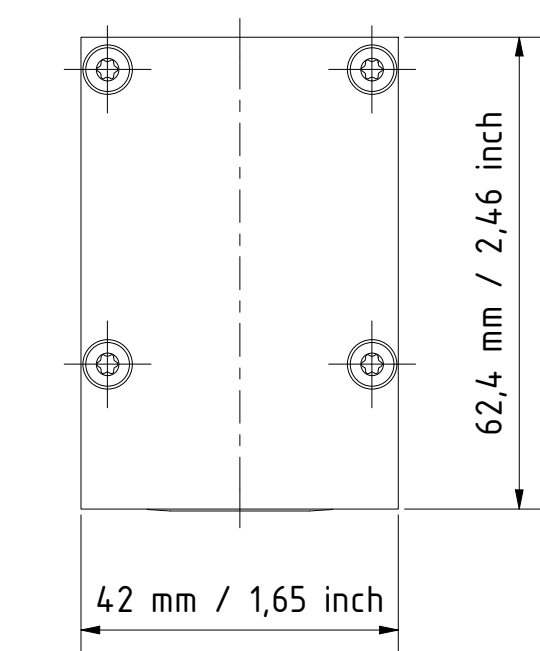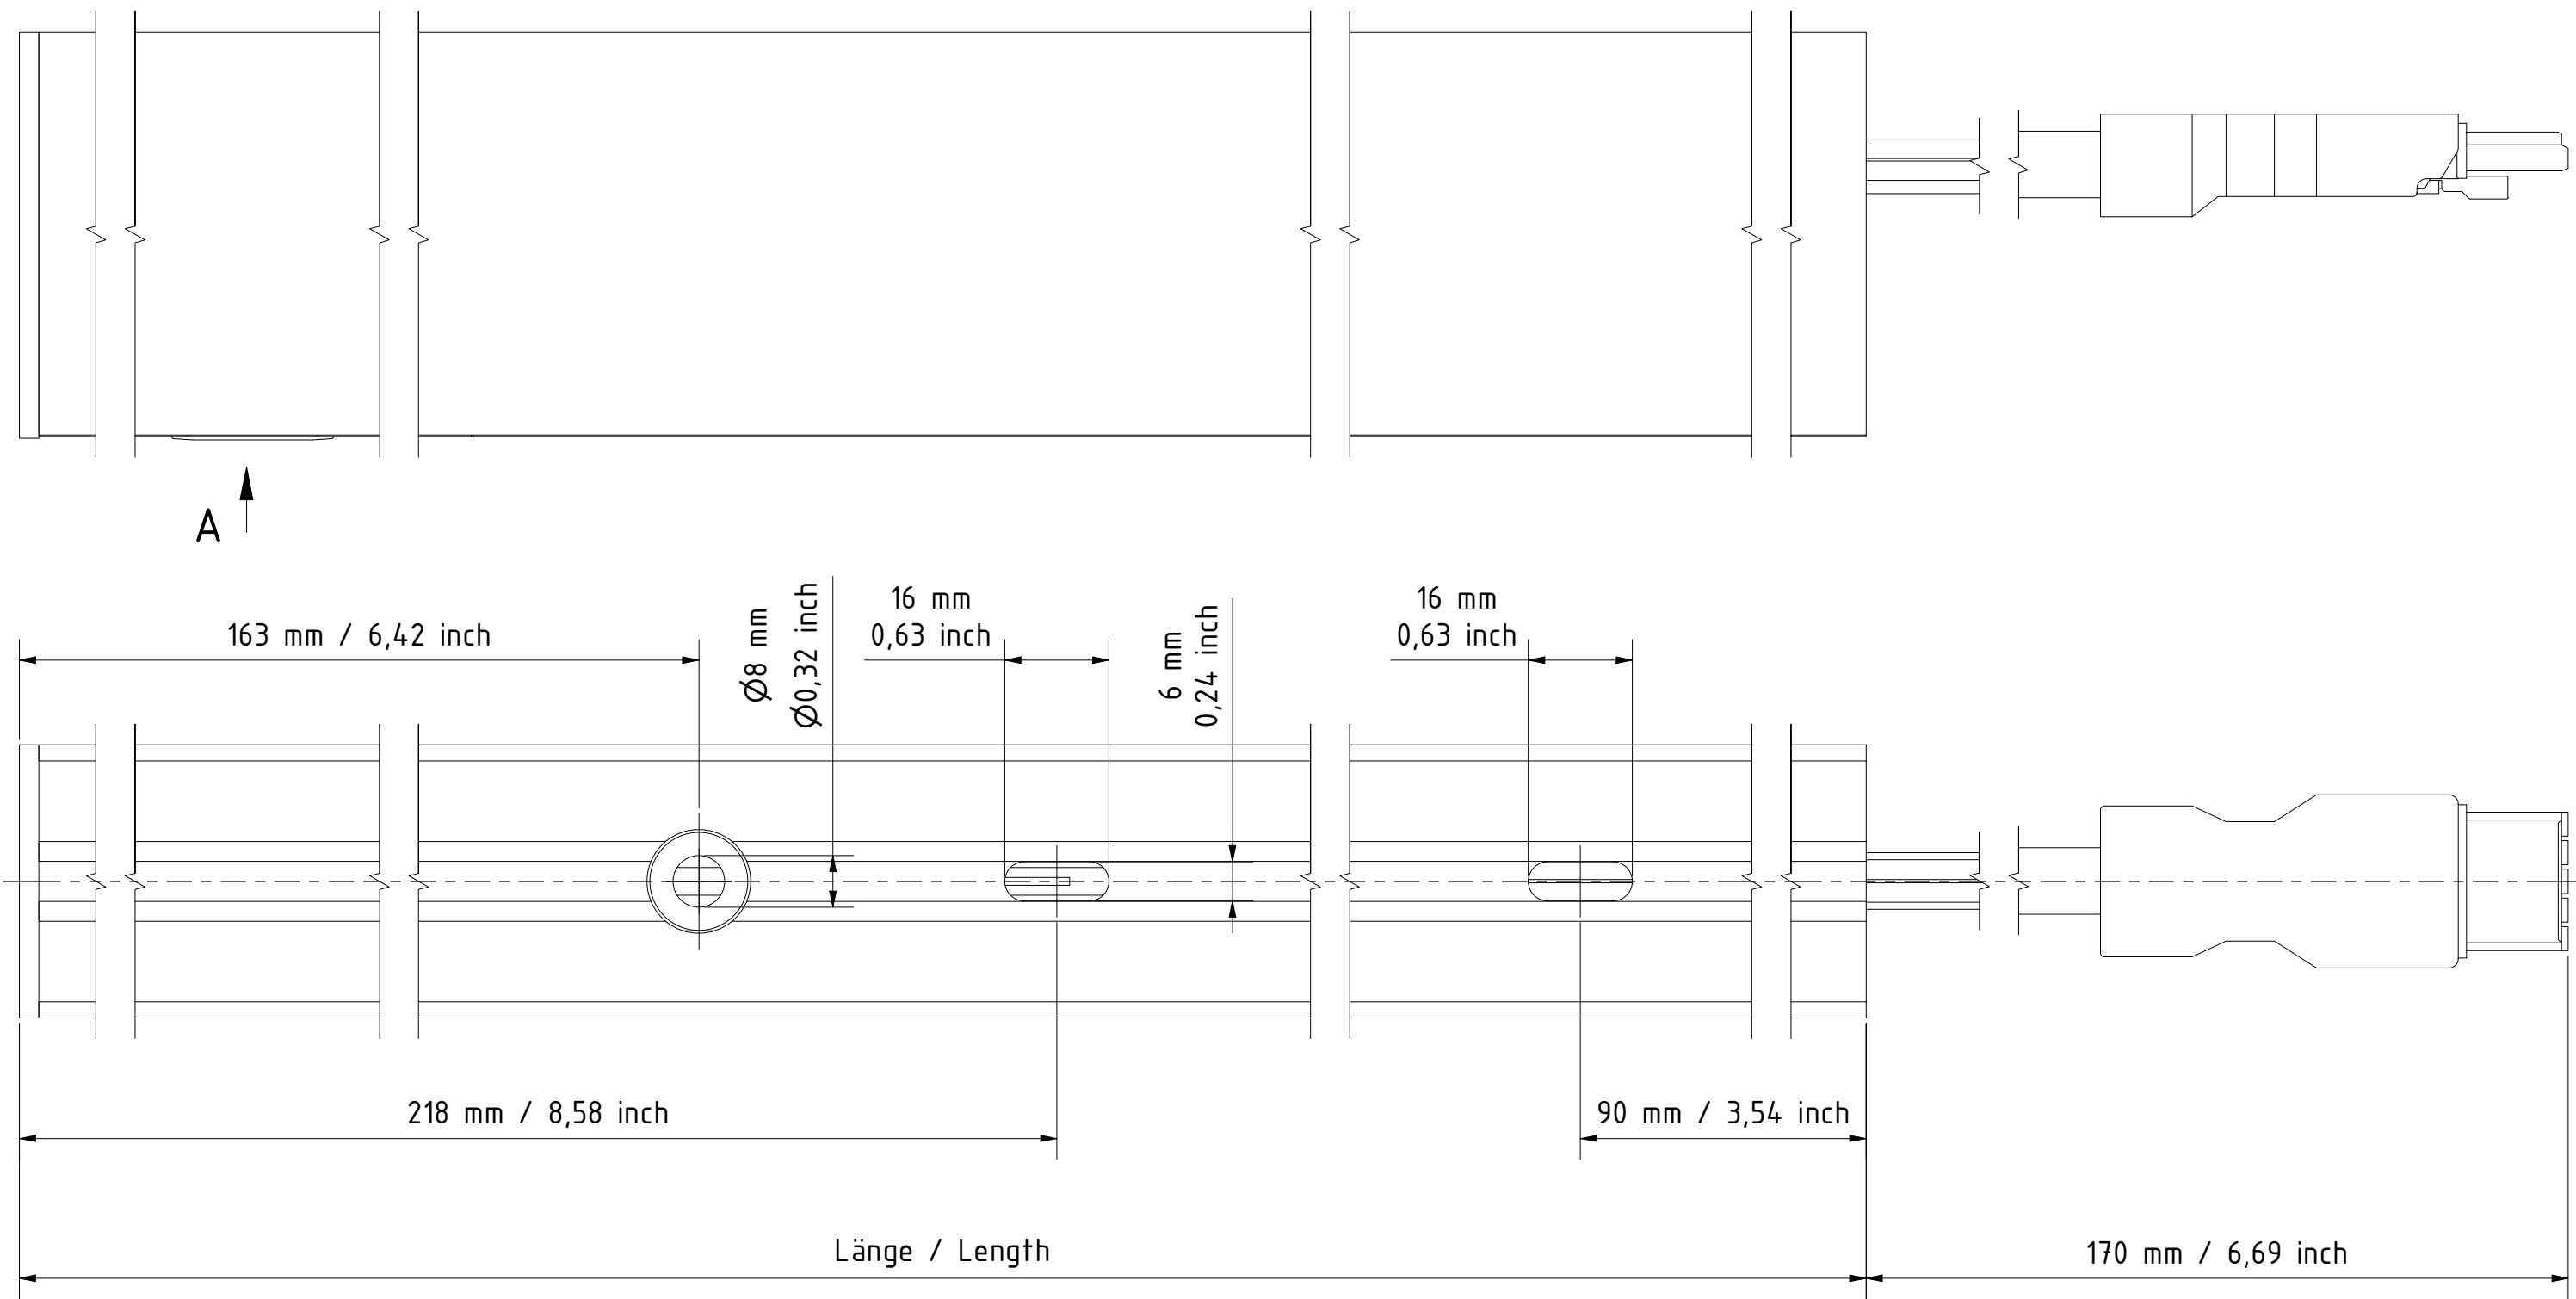

A (1 : 1,5)

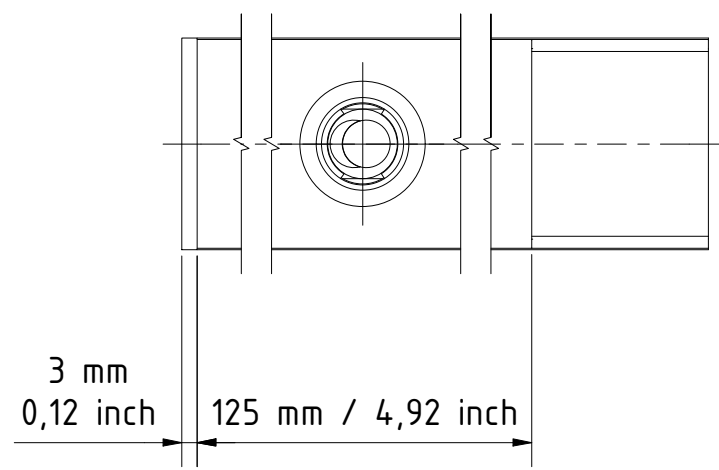

Toleranzen und Längen / Tolerances and Lenghts:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1134 mm; Lmax: 2134 mm; in 125 mm increments
Lmin IQW: 1134 mm; Lmax: 2134 mm; in 62,5 mm increments


Lmin Mono: 44,65 inch; Lmax: 84,02 inch; in 4,92 inch increments
Lmin IQW: 44,65 inch; Lmax: 84,02 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
					Date		Name	Art.-No.:			
				Drawn	19.04.2024		Zeyen	Title:			
				Controlled	19.04.2024		Weßels	MARS ARCHITECTURAL OL CR Surface			
				Approved				Typ 62 Internal Beginning with Sensor			
					Refer to protection notice ISO 16016			Drawing number: VT 511.0071			
								Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet4/5 A2
Index	Revision	Date	Name	Origin:				Replacement for:		Replaced by:	


Standard MARS ARCHITECTURAL OL CR Surface
Typ 62 Internal End with Sensor

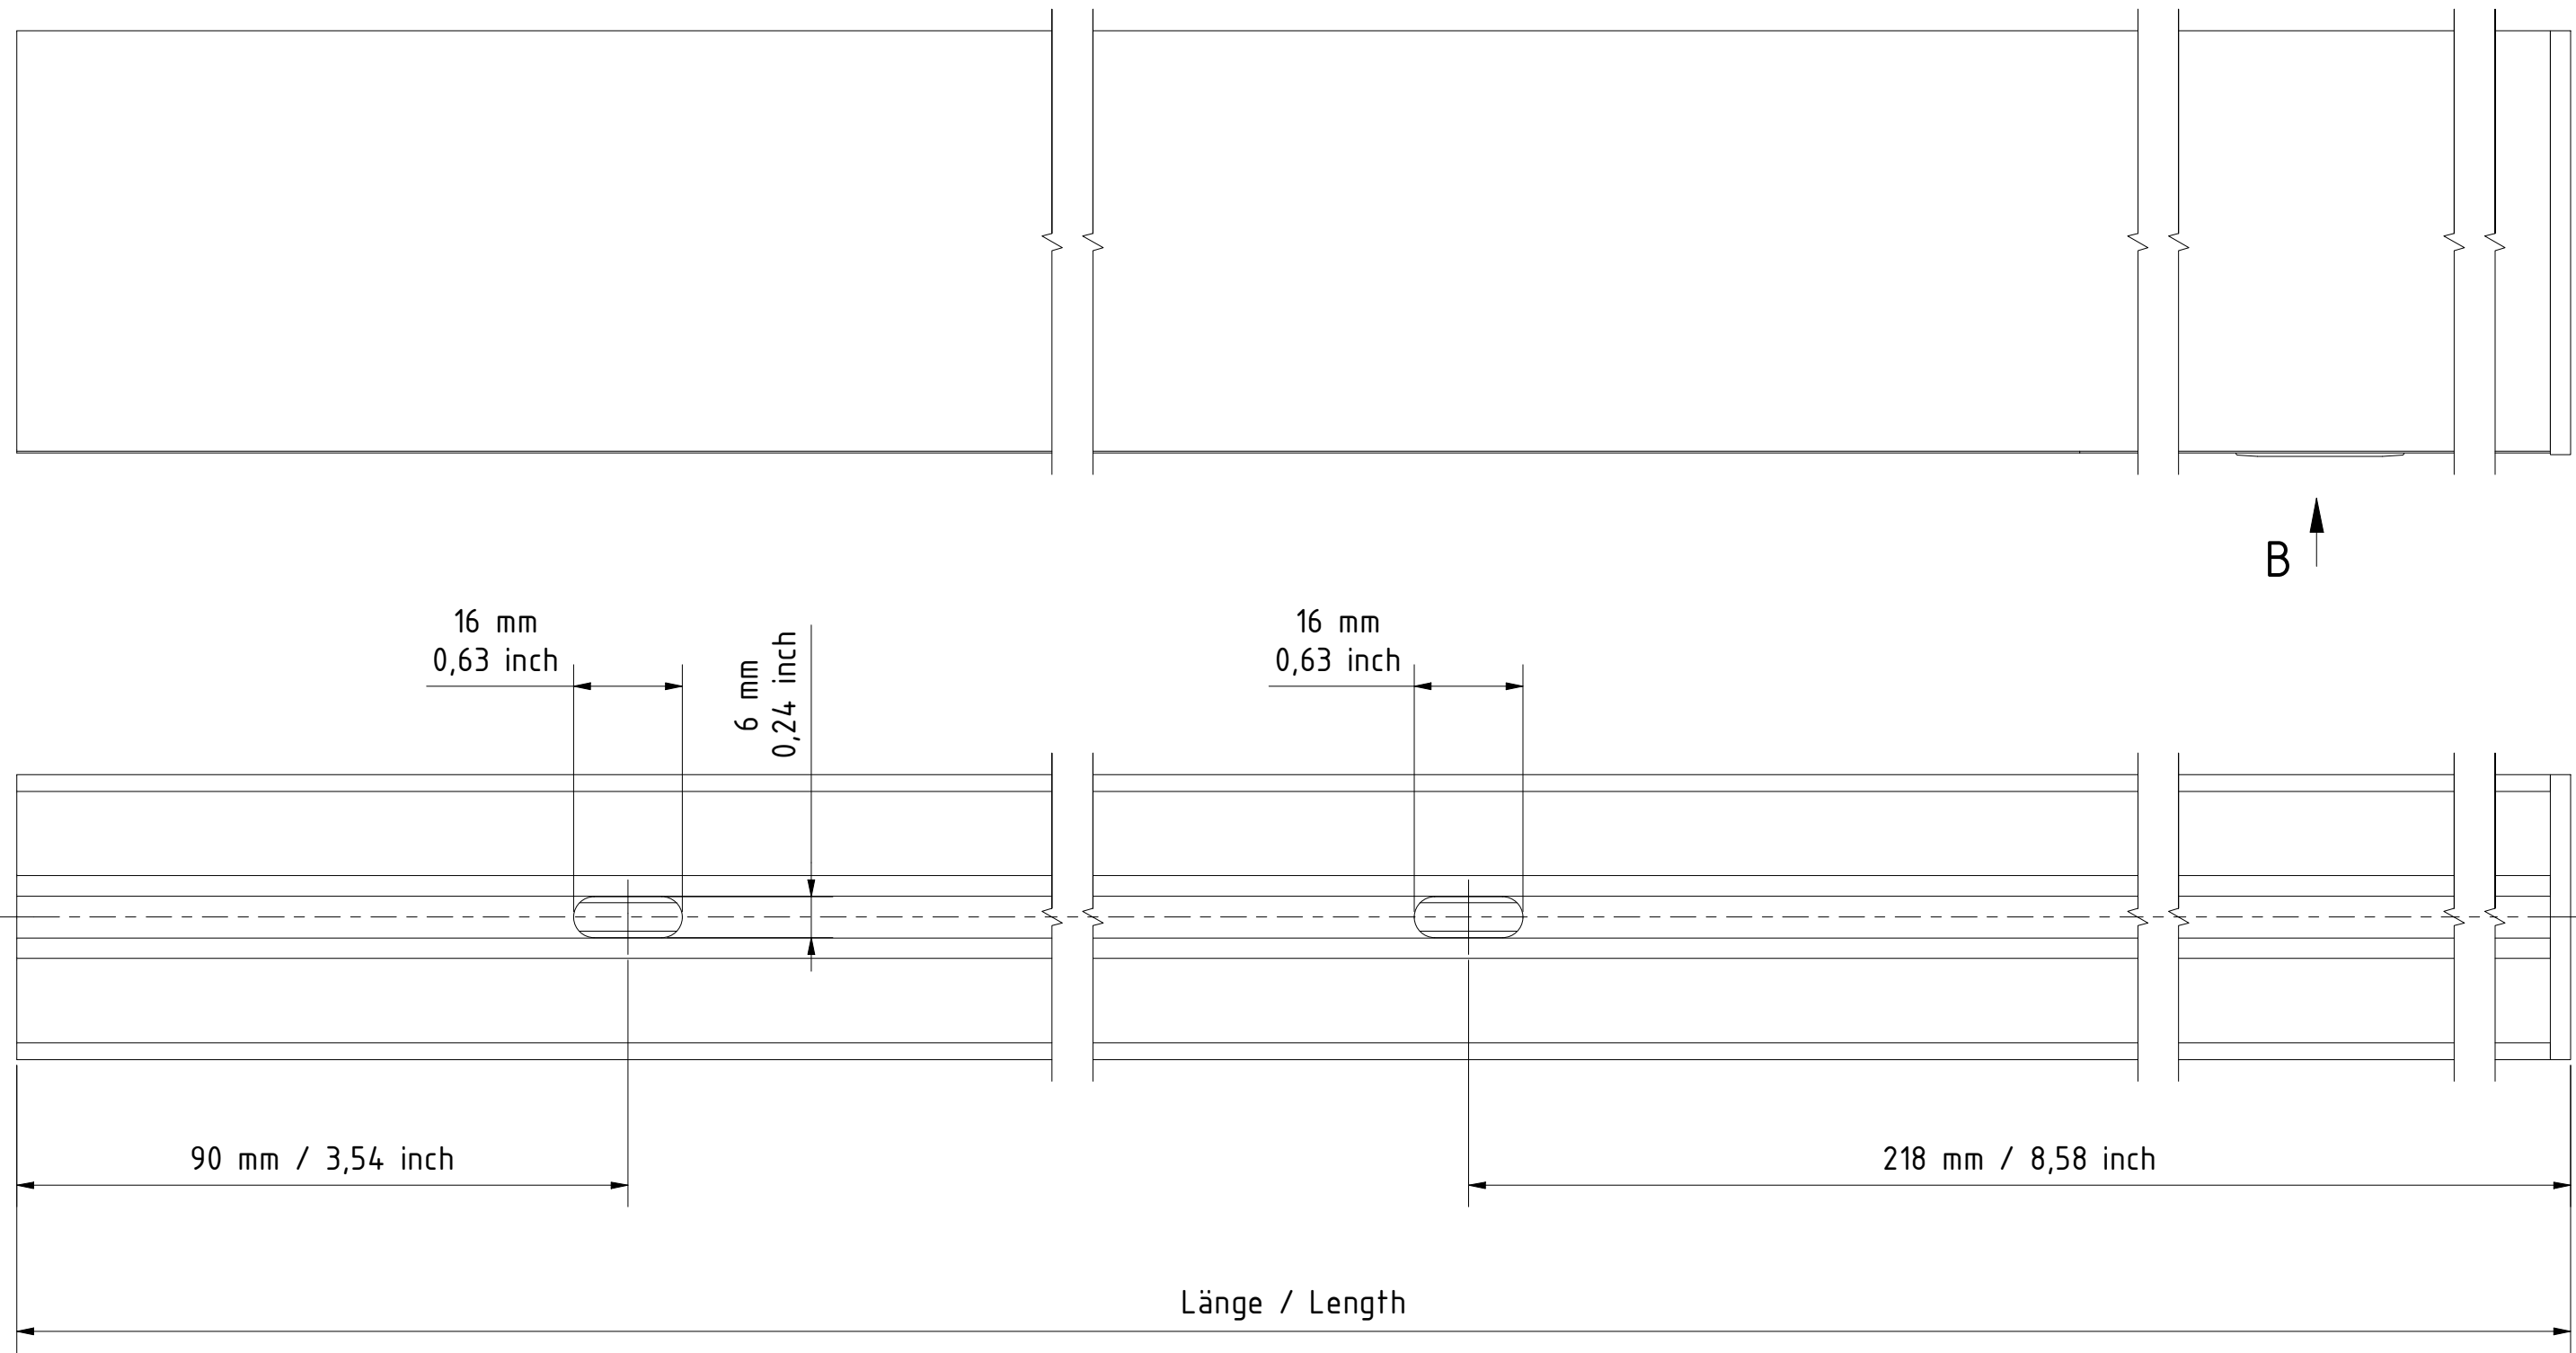


A

B

A (1 : 1)

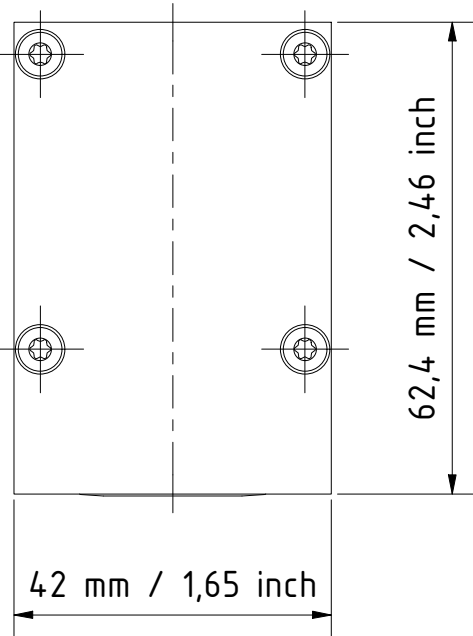

B (1 : 1,5)

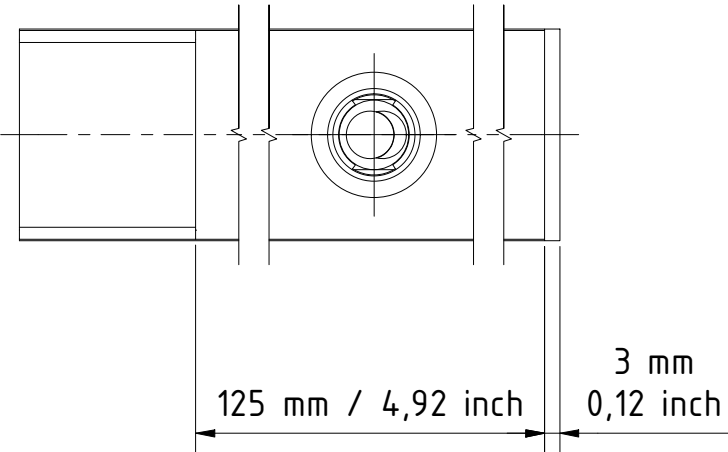

Toleranzen und Längen / Tolerances and Lengths:



Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 1134 mm; Lmax: 2134 mm; in 125 mm increments
Lmin IQW: 1134 mm; Lmax: 2134 mm; in 62,5 mm increments

Lmin Mono: 44,65 inch; Lmax: 84,02 inch; in 4,92 inch increments
Lmin IQW: 44,65 inch; Lmax: 84,02 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:				
					Date	Name		Art.-No.:						
				Drawn	19.04.2024	Zeyen		Title:						
				Controlled	19.04.2024	Weßels		MARS ARCHITECTURAL OL CR Surface						
				Approved				Typ 62 Internal End with Sensor						
				Refer to protection notice ISO 16016						Drawing number: VT 511.0071		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet5/5
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:					