
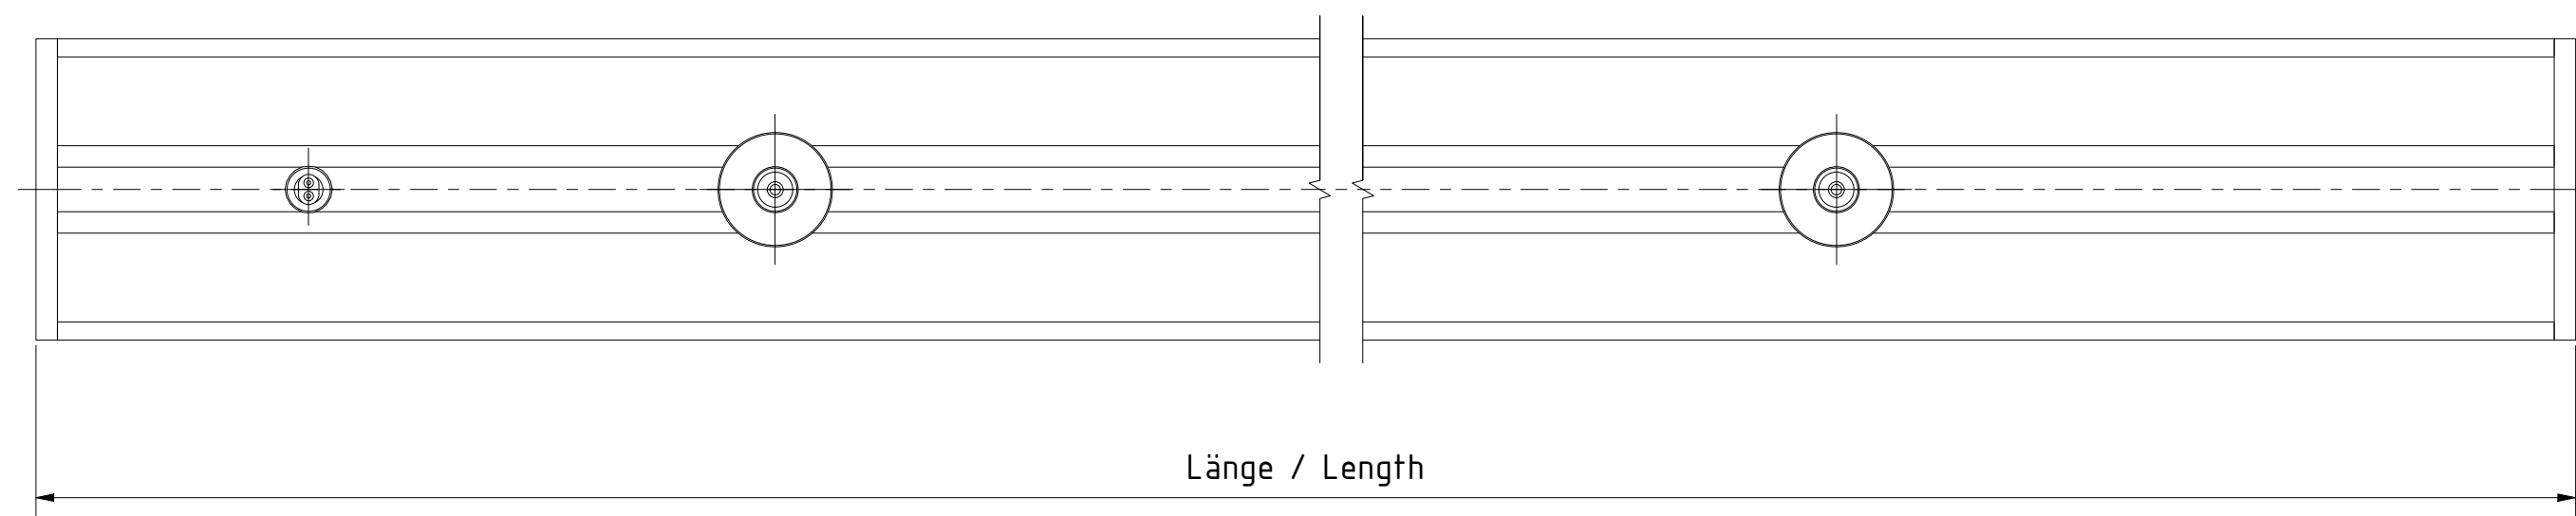
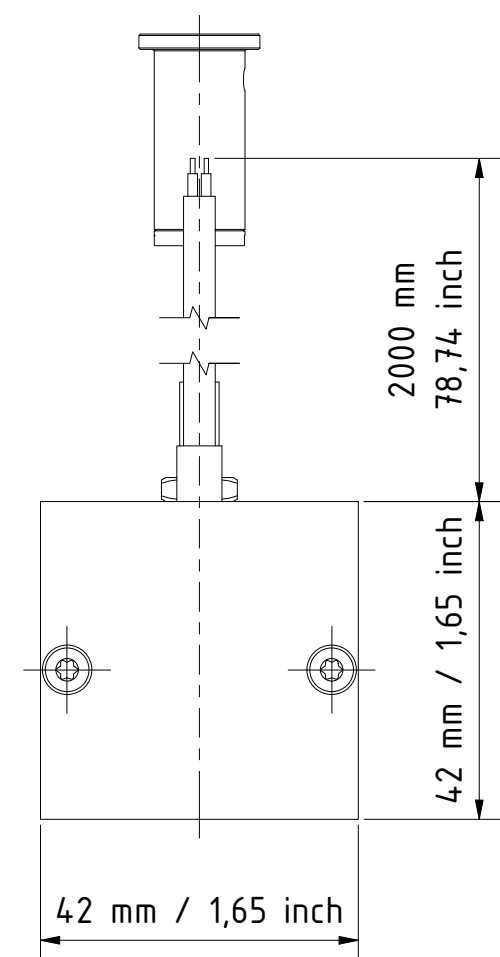


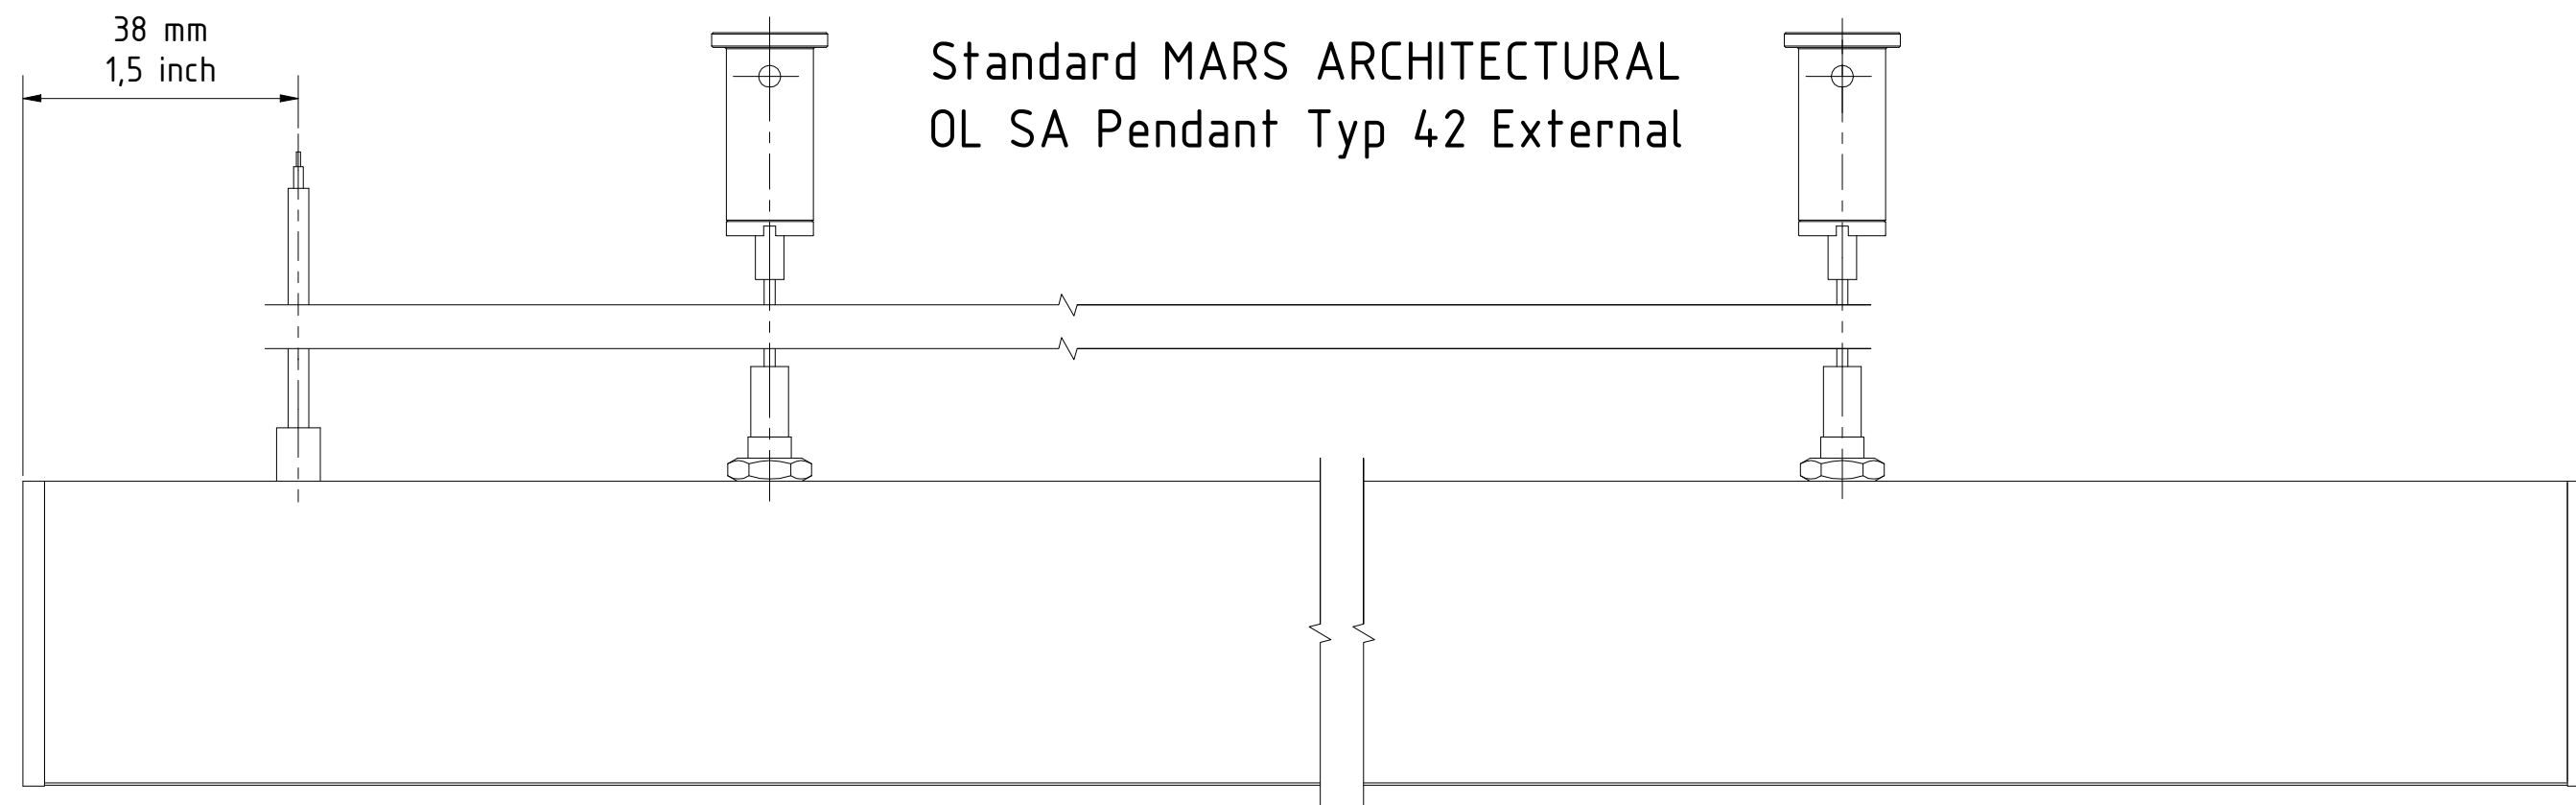

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch


Lmin Mono: 387 mm; Lmax: 3012 mm; in 125 mm increments
 Lmin IQW: 325 mm; Lmax: 3012 mm; in 62,5 mm increments
 Lmin RGBW: 345 mm; Lmax: 3012 mm; in 83,333 mm increments


Lmin Mono: 15,24 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 12,80 inch; Lmax: 118,58 inch; in 2,46 inch increments
Lmin RGBW: 13,58 inch; Lmax: 118,58 inch; in 3,28 inch increments


Werkstoffe und Farb-Varianten
/ Material and Color options:

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

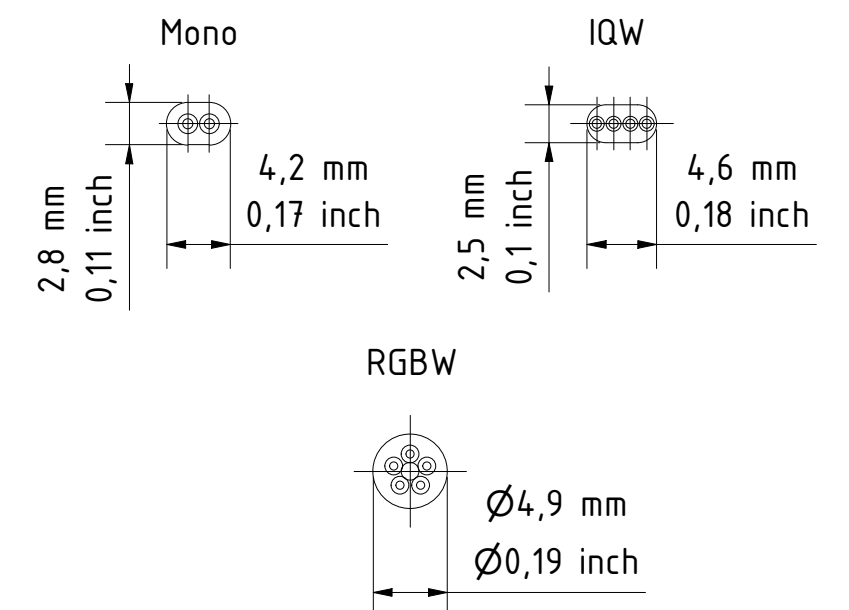

								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
								Art.-No.:			
				Date 30.01.2023		Name Zeyen		Title:			
				Drawn 30.01.2023		Controlled Weßels		MARS ARCHITECTURAL OL SA Pendant			
				Approved				Typ 42 External			
				Refer to protection notice ISO 16016							
A Blatt 4 mit Sensor hinzugef.				26.03.2024		Zeyen		Drawing number: VT 511.0043 A		Surface details acc. to DIN ISO 1502 in Ra/Rank 2	
Index		Revision		Date		Name		Scale 1:1		Sheet1/4 A2	
Origin:								Replacement for:		Replaced by:	

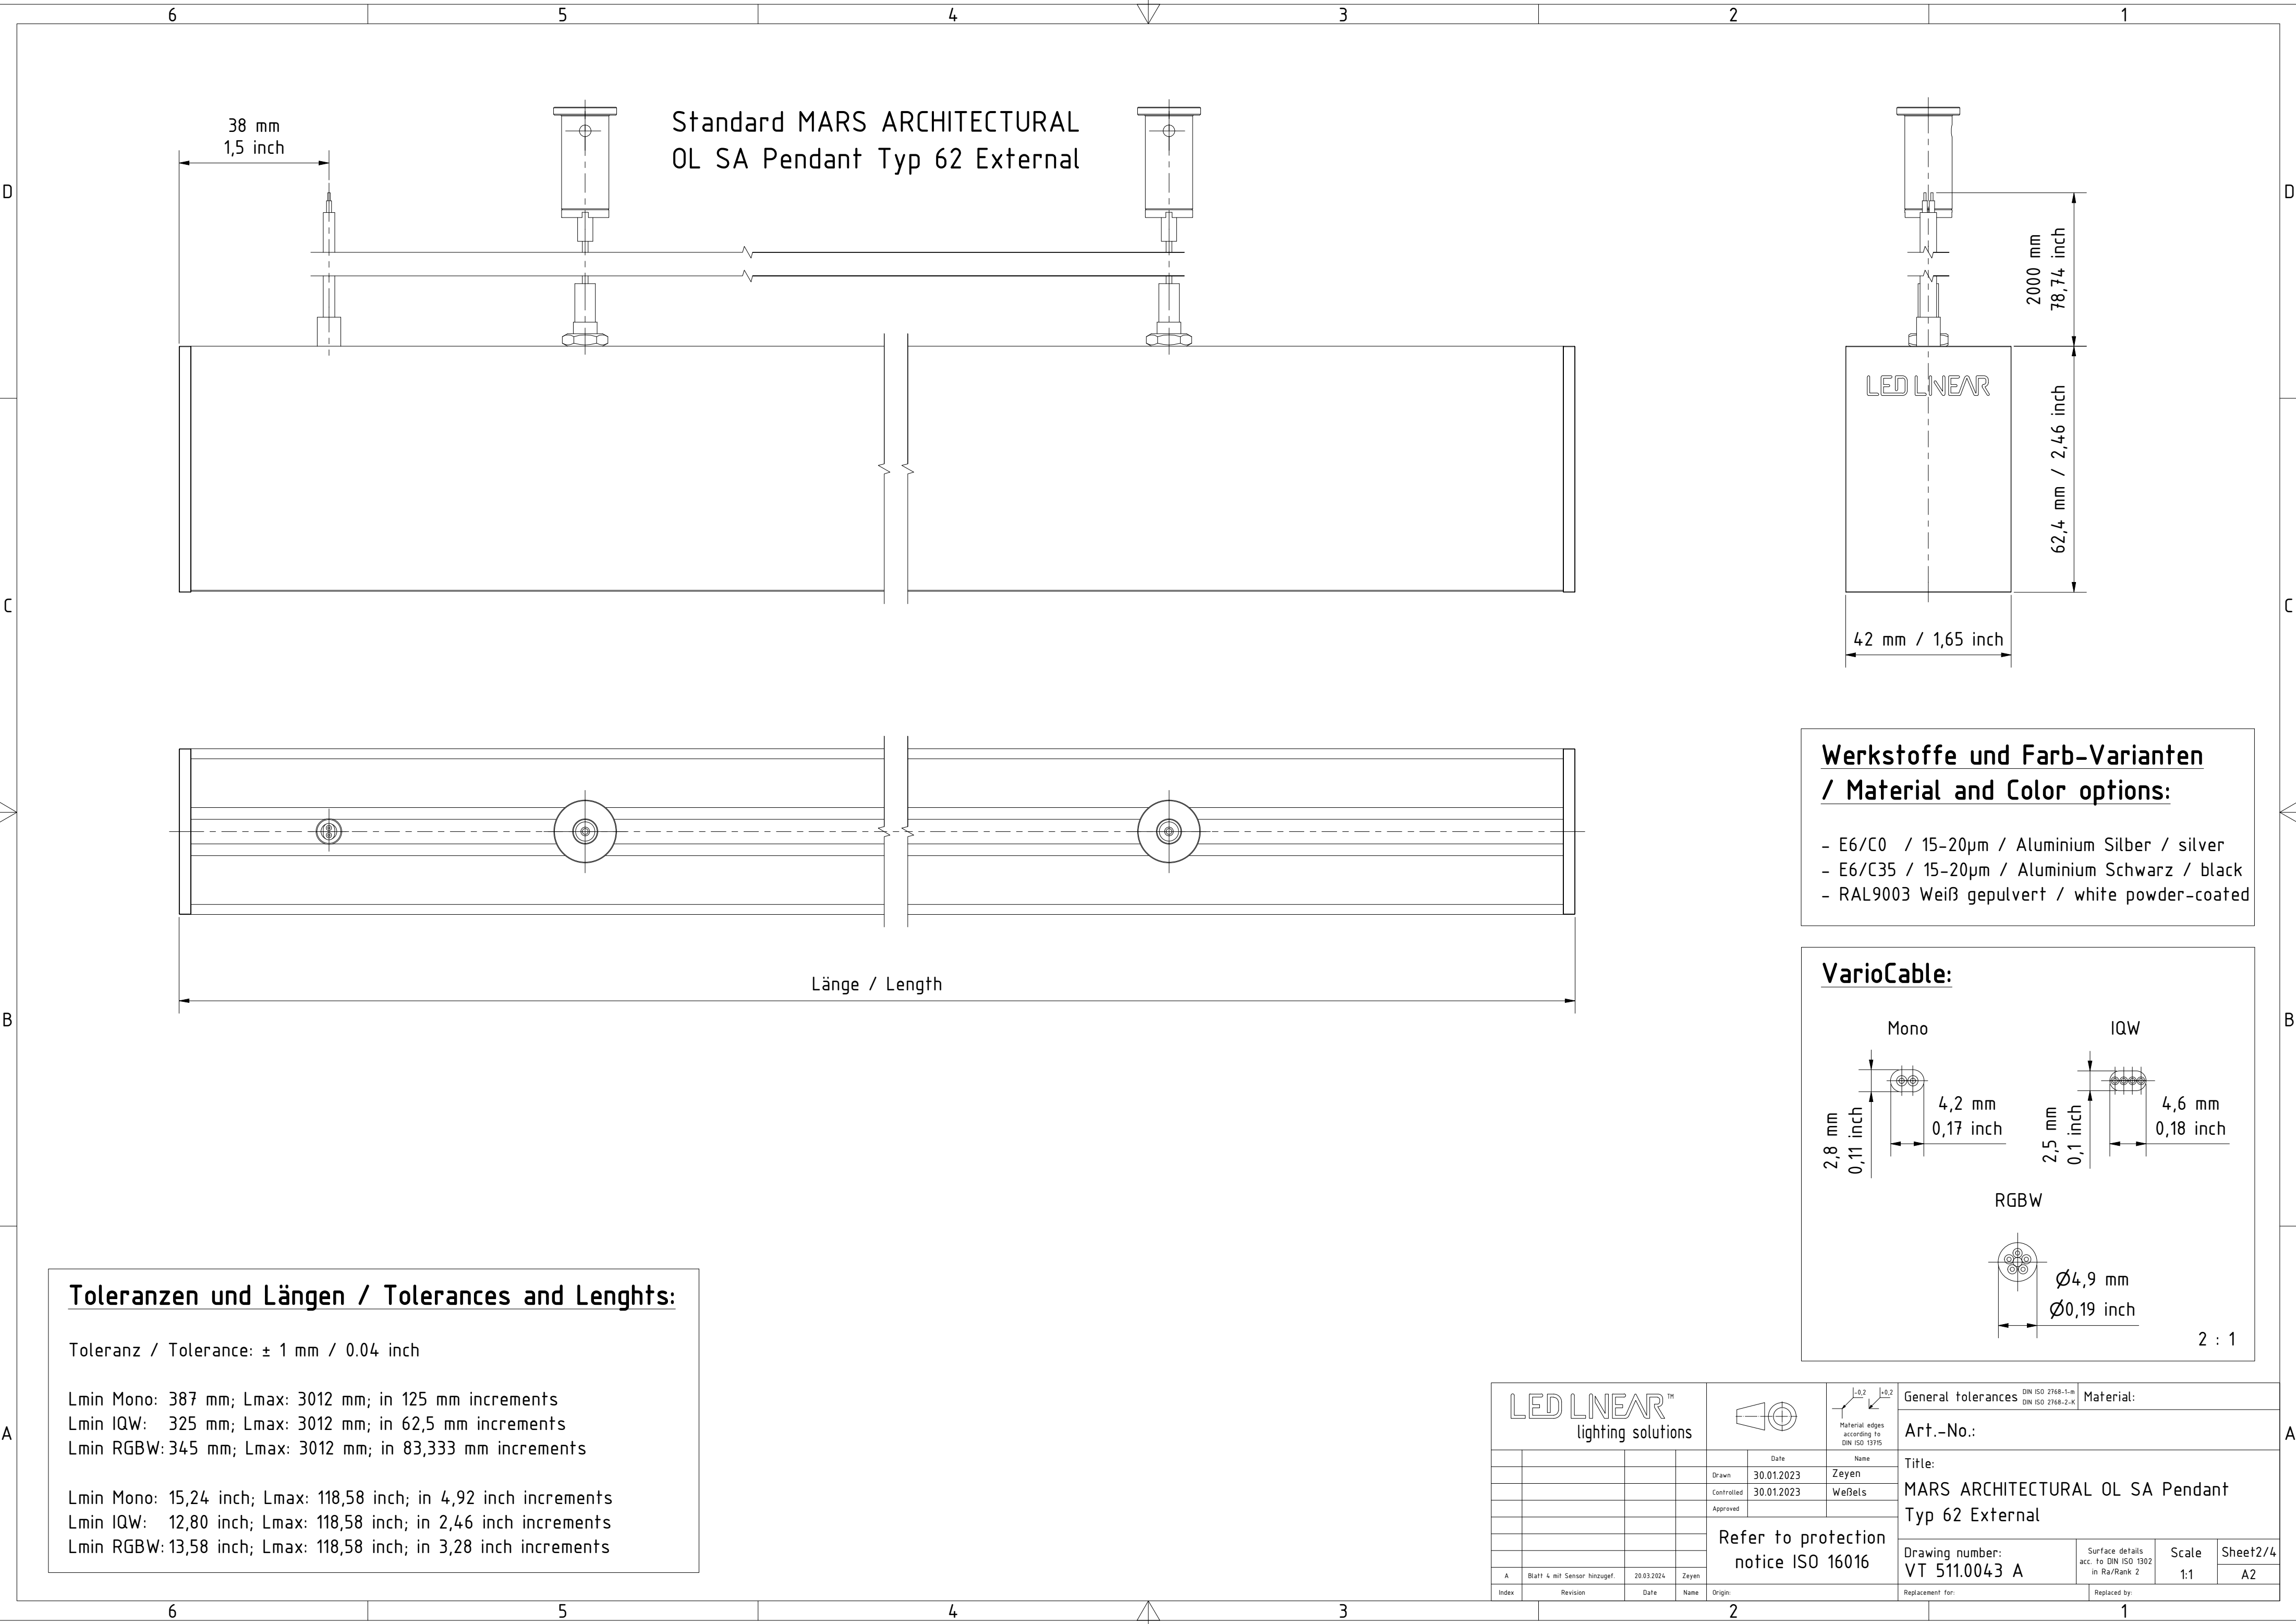

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 387 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 325 mm; Lmax: 3012 mm; in 62,5 mm increments
Lmin RGBW: 345 mm; Lmax: 3012 mm; in 83,333 mm increments



Lmin Mono: 15,24 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 12,80 inch; Lmax: 118,58 inch; in 2,46 inch increments
Lmin RGBW: 13,58 inch; Lmax: 118,58 inch; in 3,28 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

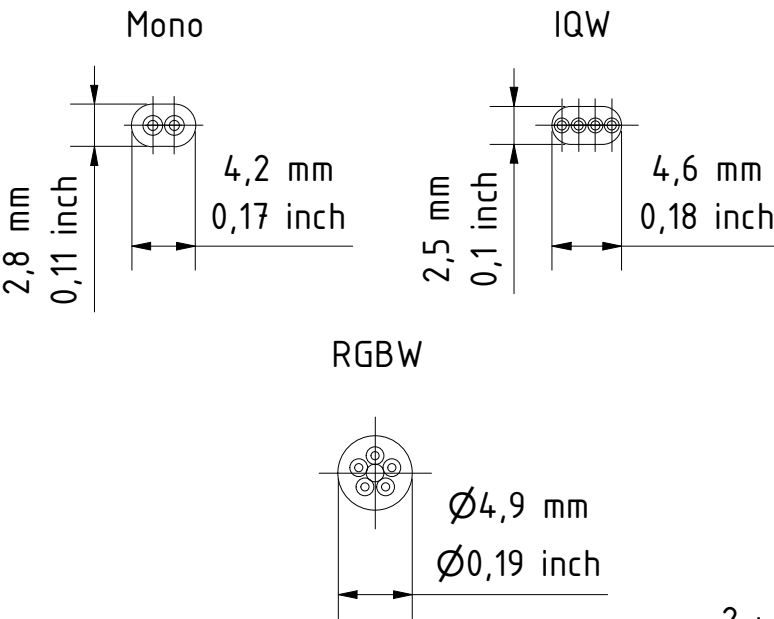

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
					Date	Name		Art.-No.:			
					Drawn	30.01.2023		Zeyen		Title:	
					Controlled	30.01.2023		Weßels		MARS ARCHITECTURAL OL SA Pendant	
					Approved					Typ 62 External	
					Refer to protection notice ISO 16016						
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen							
Index	Revision		Date	Name	Origin:	Replacement for:			Replaced by:		

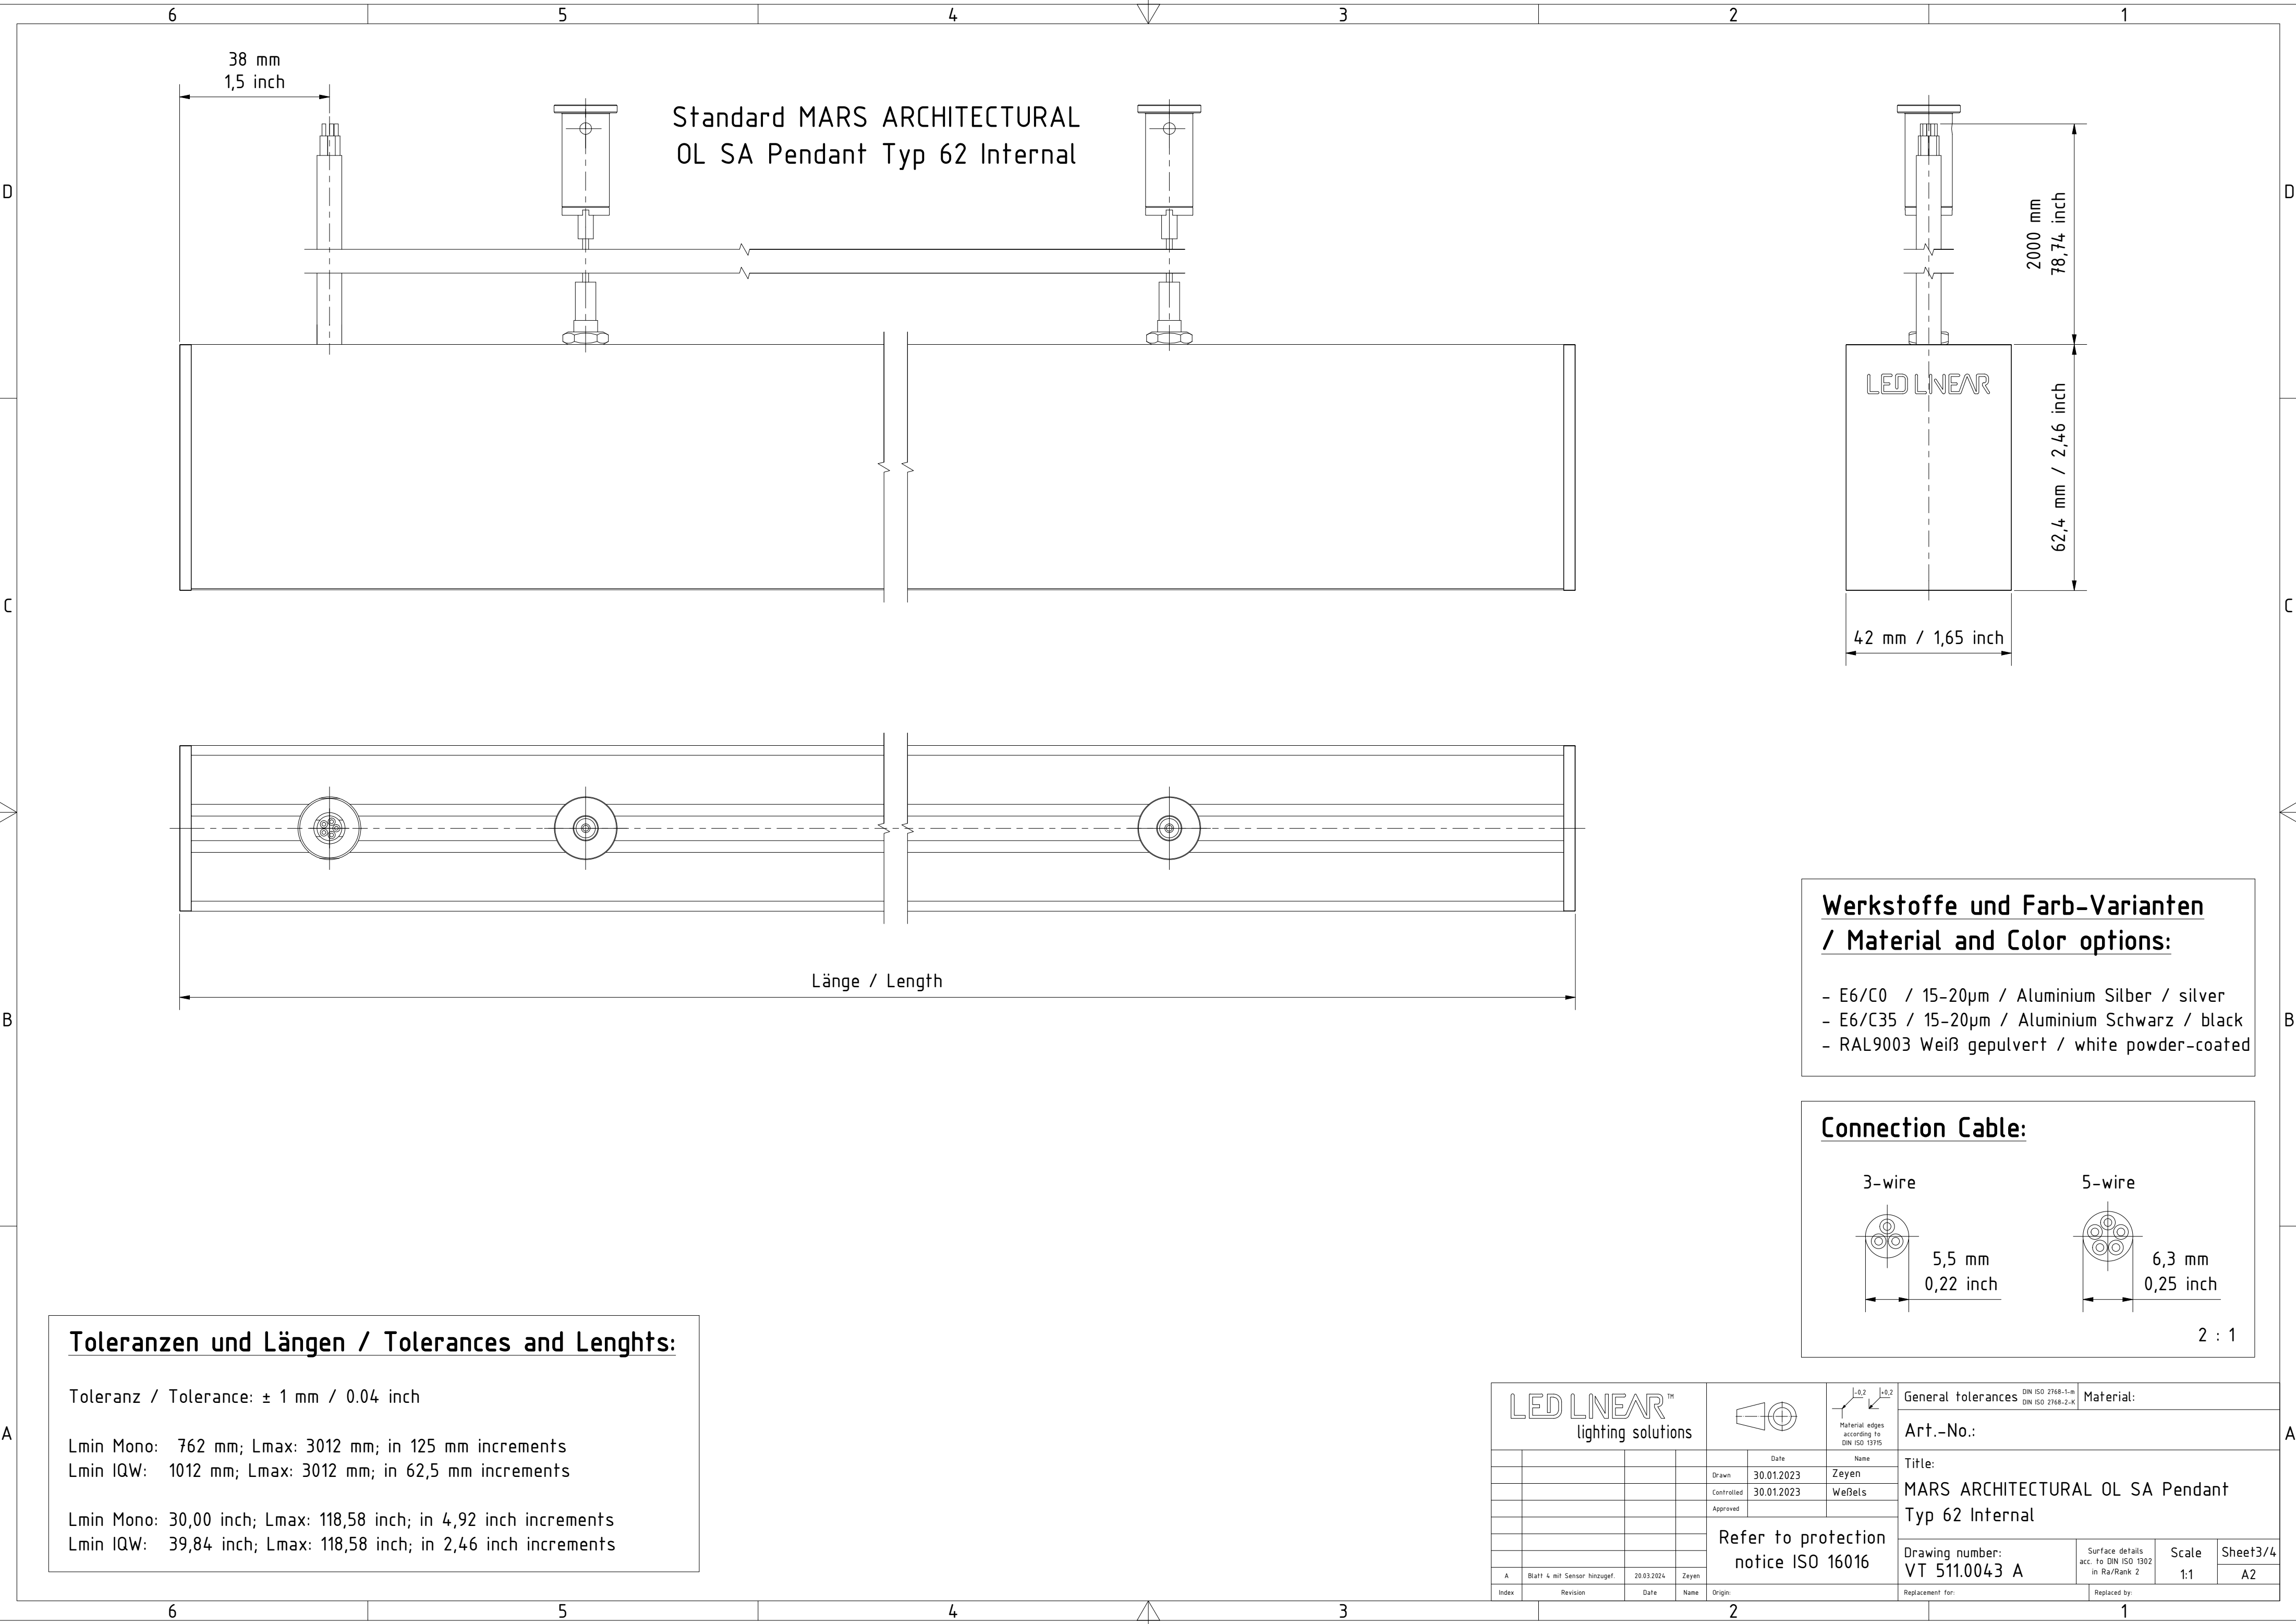

Standard MARS ARCHITECTURAL
OL SA Pendant Typ 62 Internal

LED LINEAR

Länge / Length

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch

Lmin Mono: 762 mm; Lmax: 3012 mm; in 125 mm increments

Lmin IQW: 1012 mm; Lmax: 3012 mm; in 62,5 mm increments

Lmin Mono: 30,00 inch; Lmax: 118,58 inch; in 4,92 inch increments


Lmin IQW: 39,84 inch; Lmax: 118,58 inch; in 2,46 inch increments

Werkstoffe und Farb-Varianten
/ Material and Color options:

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated


Connection Cable:

3-wire





5,5 mm
0,22 inch


5-wire



6,3 mm
0,25 inch

2 : 1

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
					Date		Name	Art.-No.:				
				Drawn	30.01.2023		Zeyen	Title:				
				Controlled	30.01.2023		Weßels	MARS ARCHITECTURAL OL SA Pendant				
				Approved				Typ 62 Internal				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0043 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet3/4 A2
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen				Replacement for:		Replaced by:		
Index	Revision		Date	Name	Origin:							

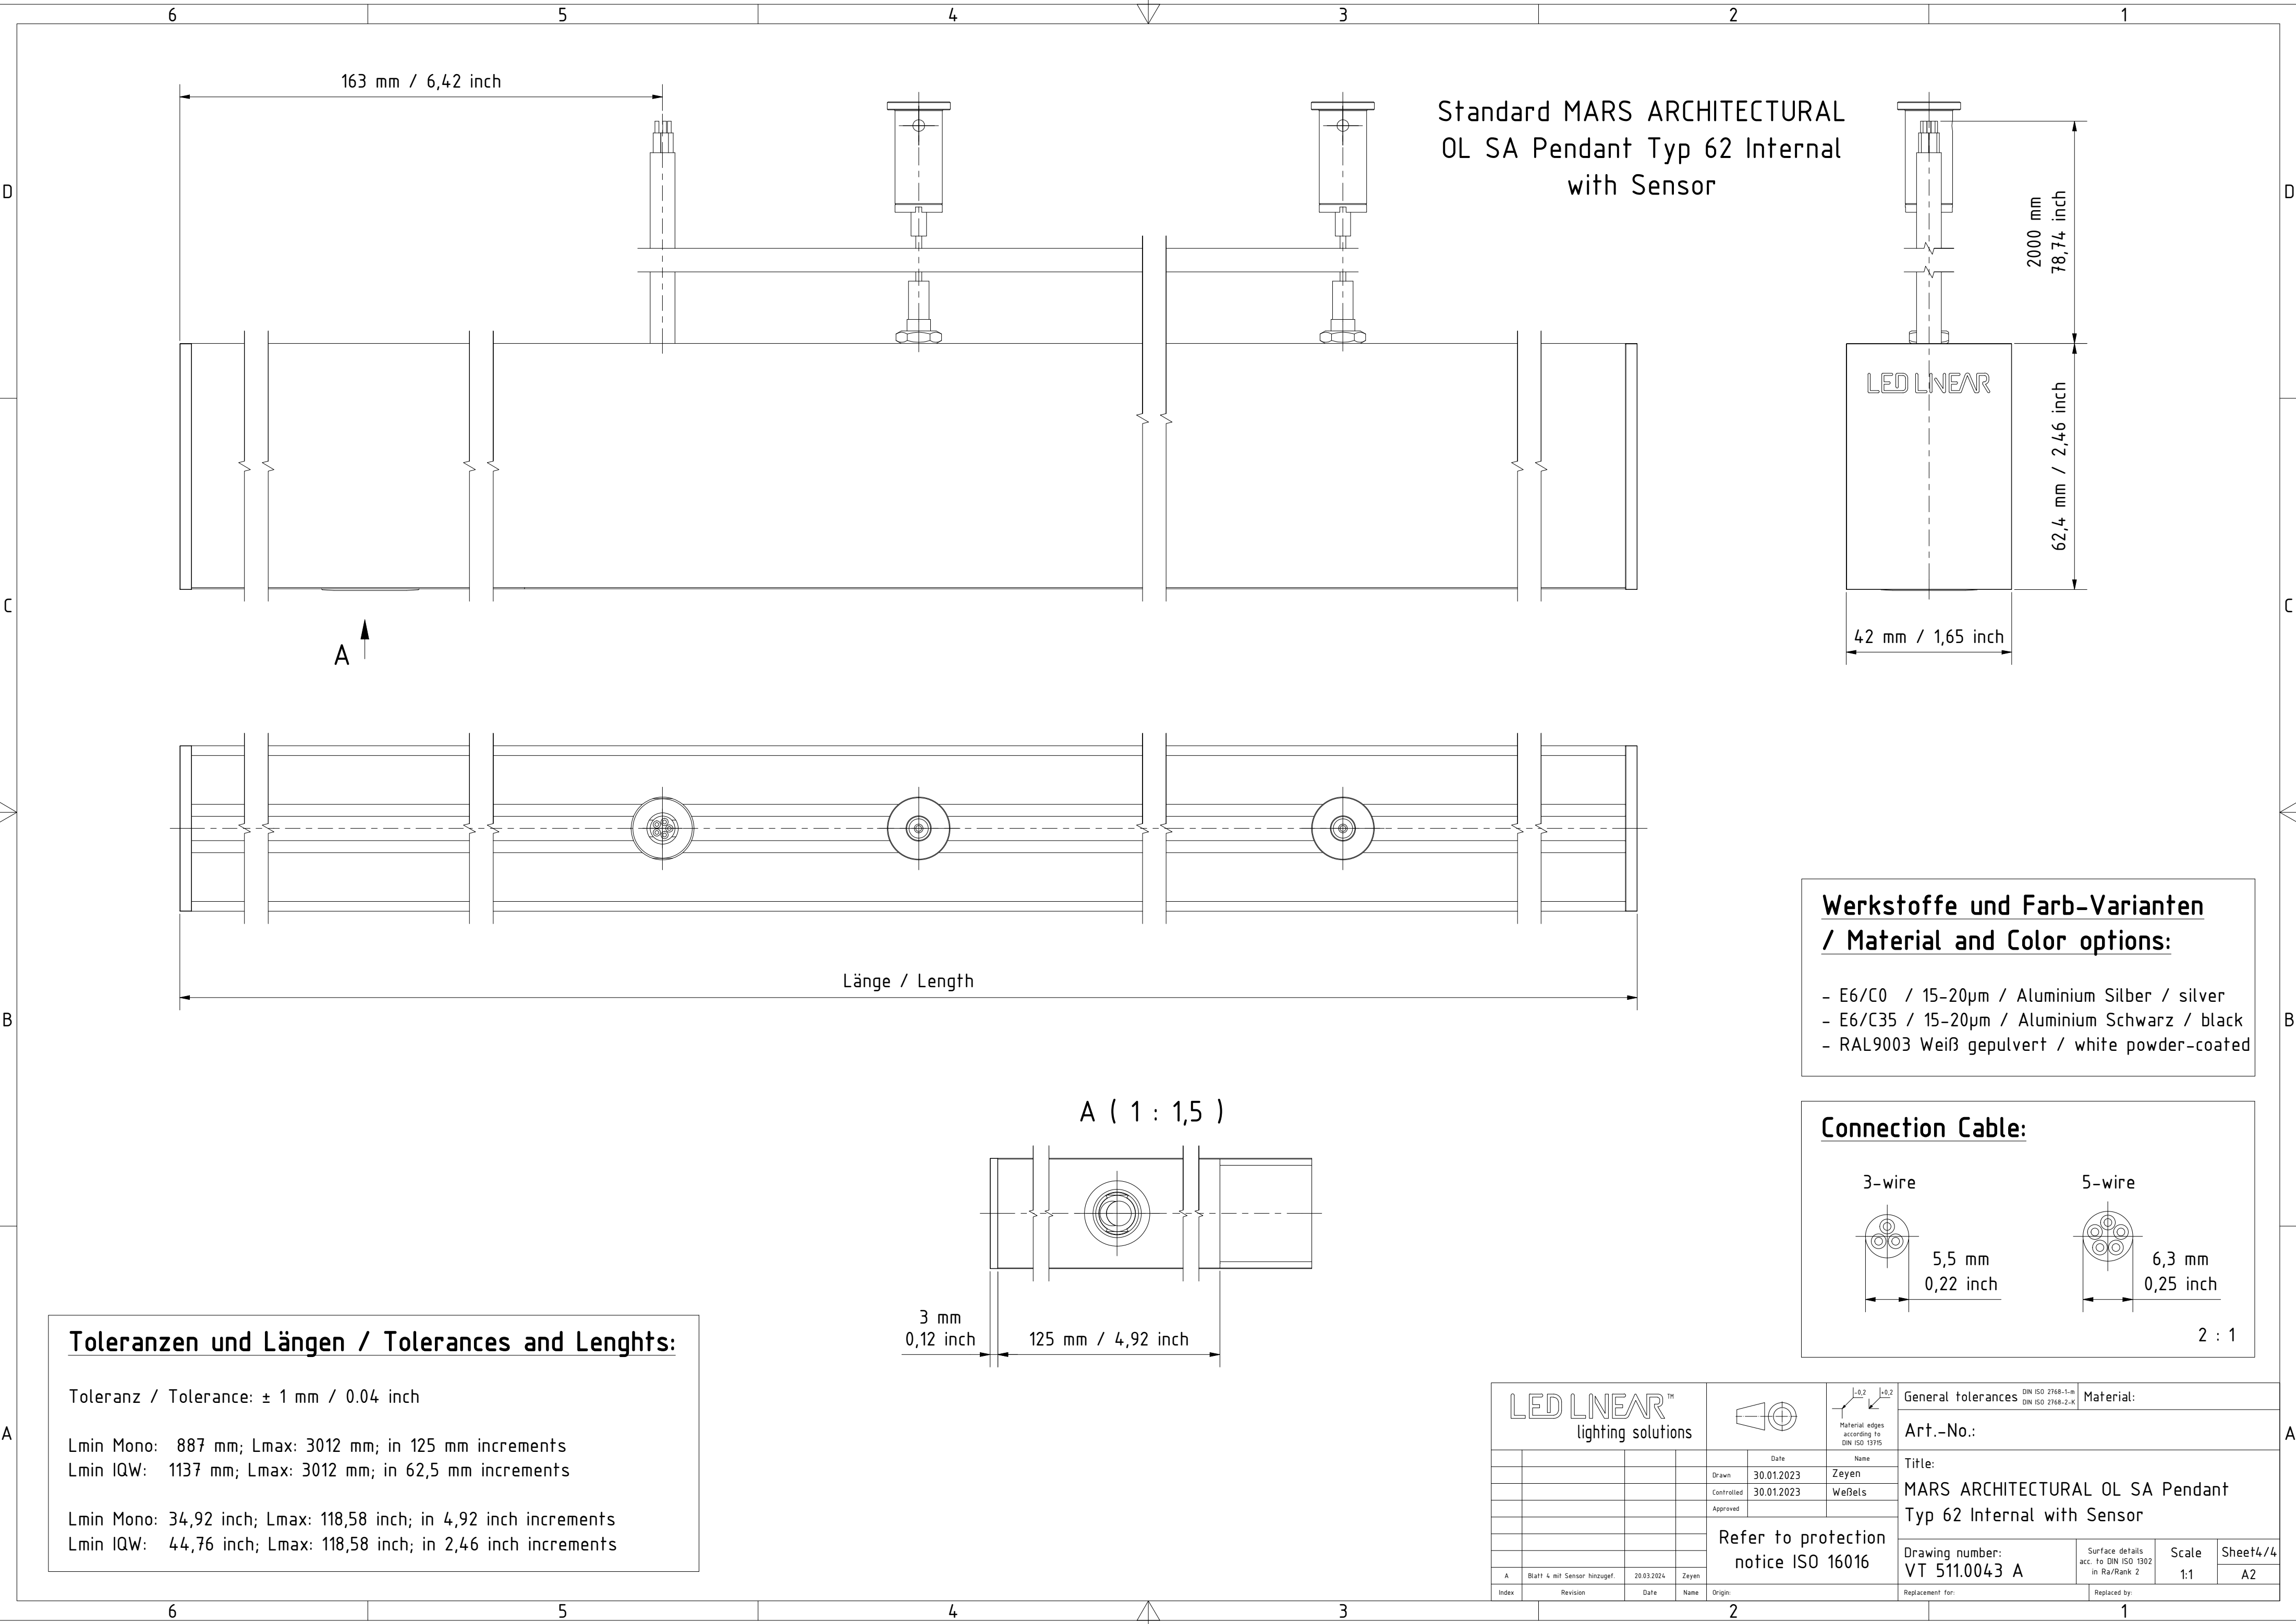

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 887 mm; Lmax: 3012 mm; in 125 mm increments

Lmin IQW: 1137 mm; Lmax: 3012 mm; in 62,5 mm increments

Lmin Mono: 34,92 inch; Lmax: 118,58 inch; in 4,92 inch increments


Lmin IQW: 44,76 inch; Lmax: 118,58 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

Connection Cable:


3-wire



5-wire



2 : 1

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
								Art.-No.:			
					Date	Name		Title:			
					Drawn	30.01.2023		Zeyen		MARS ARCHITECTURAL OL SA Pendant	
					Controlled	30.01.2023		Weßels		Typ 62 Internal with Sensor	
					Approved					Drawing number: VT 511.0043 A	
					Refer to protection notice ISO 16016			Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet4/4 A2
A	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen							
Index	Revision	Date	Name	Origin:	Replacement for:					Replaced by:	