


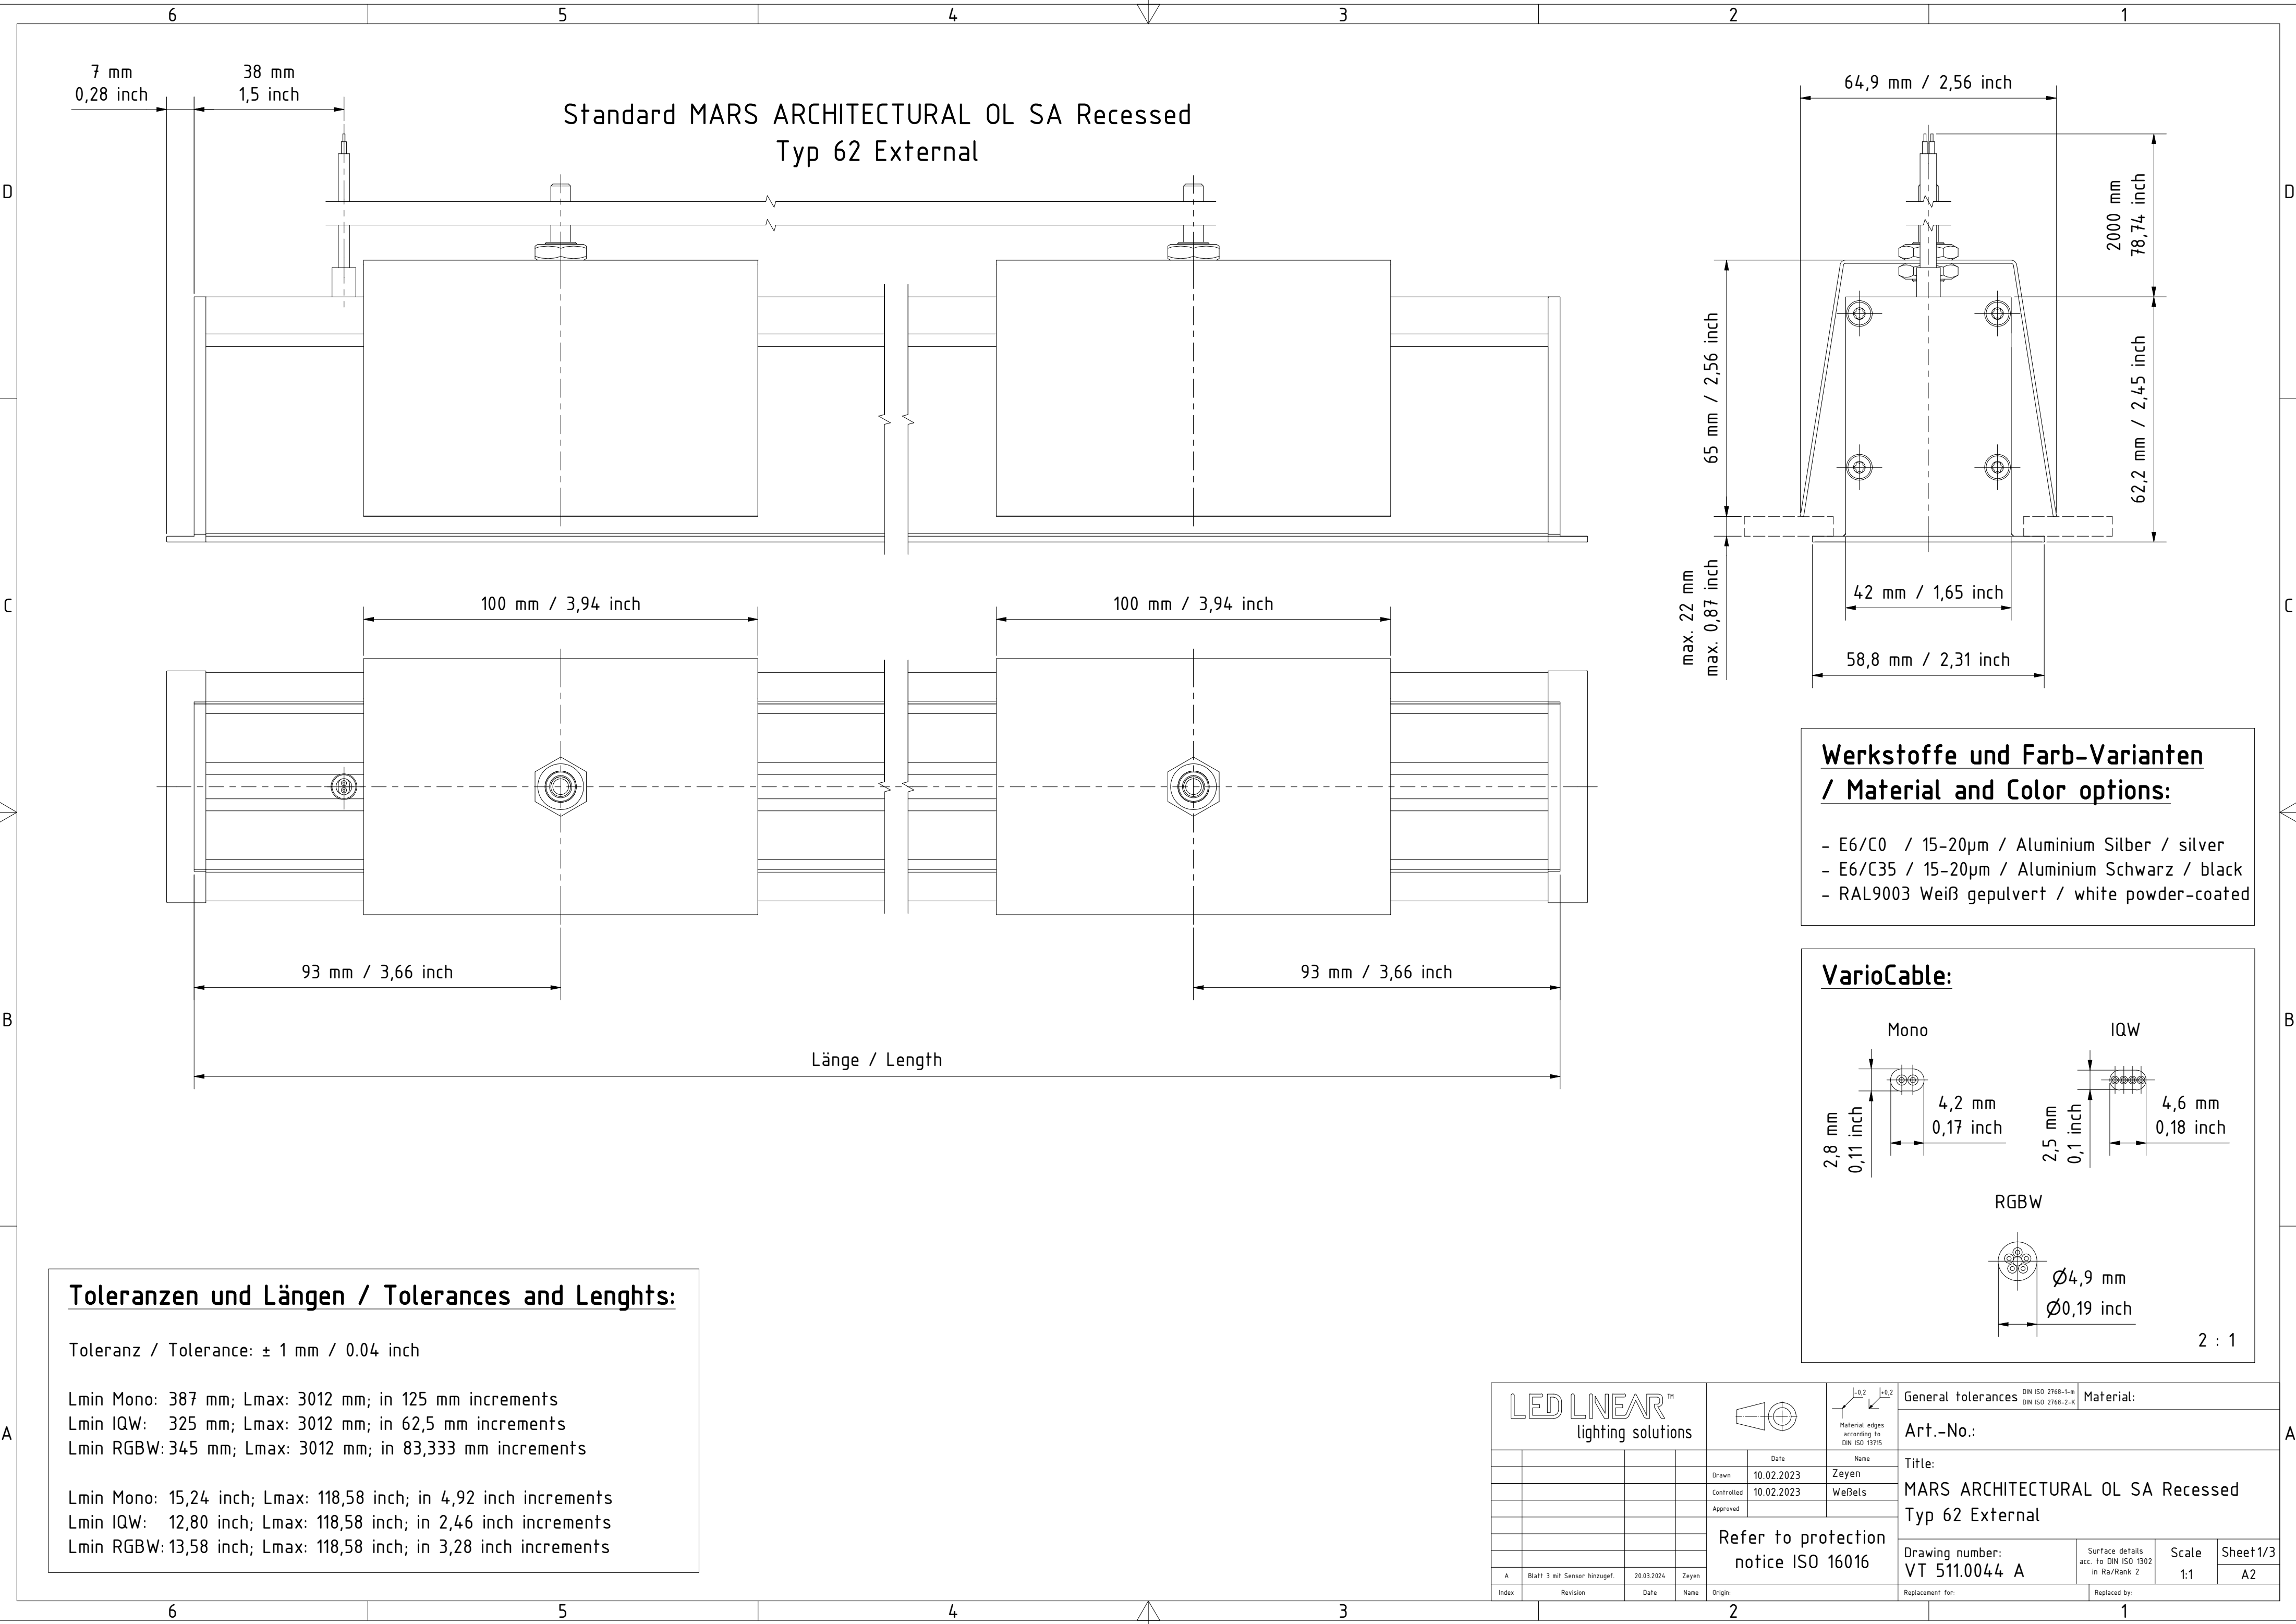

Toleranzen und Längen / Tolerances and Lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 387 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 325 mm; Lmax: 3012 mm; in 62,5 mm increments
Lmin RGBW: 345 mm; Lmax: 3012 mm; in 83,333 mm increments



Lmin Mono: 15,24 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 12,80 inch; Lmax: 118,58 inch; in 2,46 inch increments
Lmin RGBW: 13,58 inch; Lmax: 118,58 inch; in 3,28 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

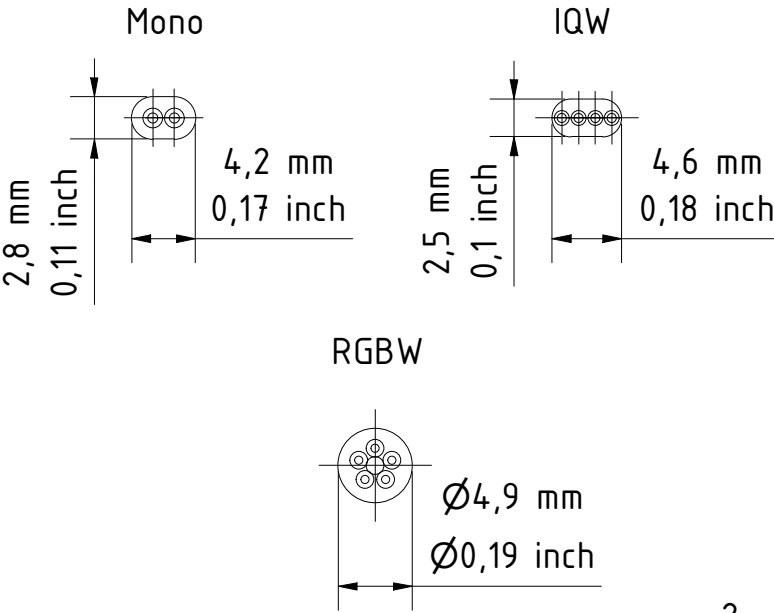

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:			
								Art.-No.:					
				Date		Name		Title:					
				Drawn 10.02.2023		Zeyen		MARS ARCHITECTURAL OL SA Recessed					
				Controlled 10.02.2023		Weßels		Typ 62 External					
				Approved									
				Refer to protection notice ISO 16016		Drawing number: VT 511.0044 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1		Sheet 1/3	
												A2	
A		Blatt 3 mit Sensor hinzugef.		20.03.2024		Zeyen							
Index		Revision		Date		Name		Origin:		Replacement for:		Replaced by:	

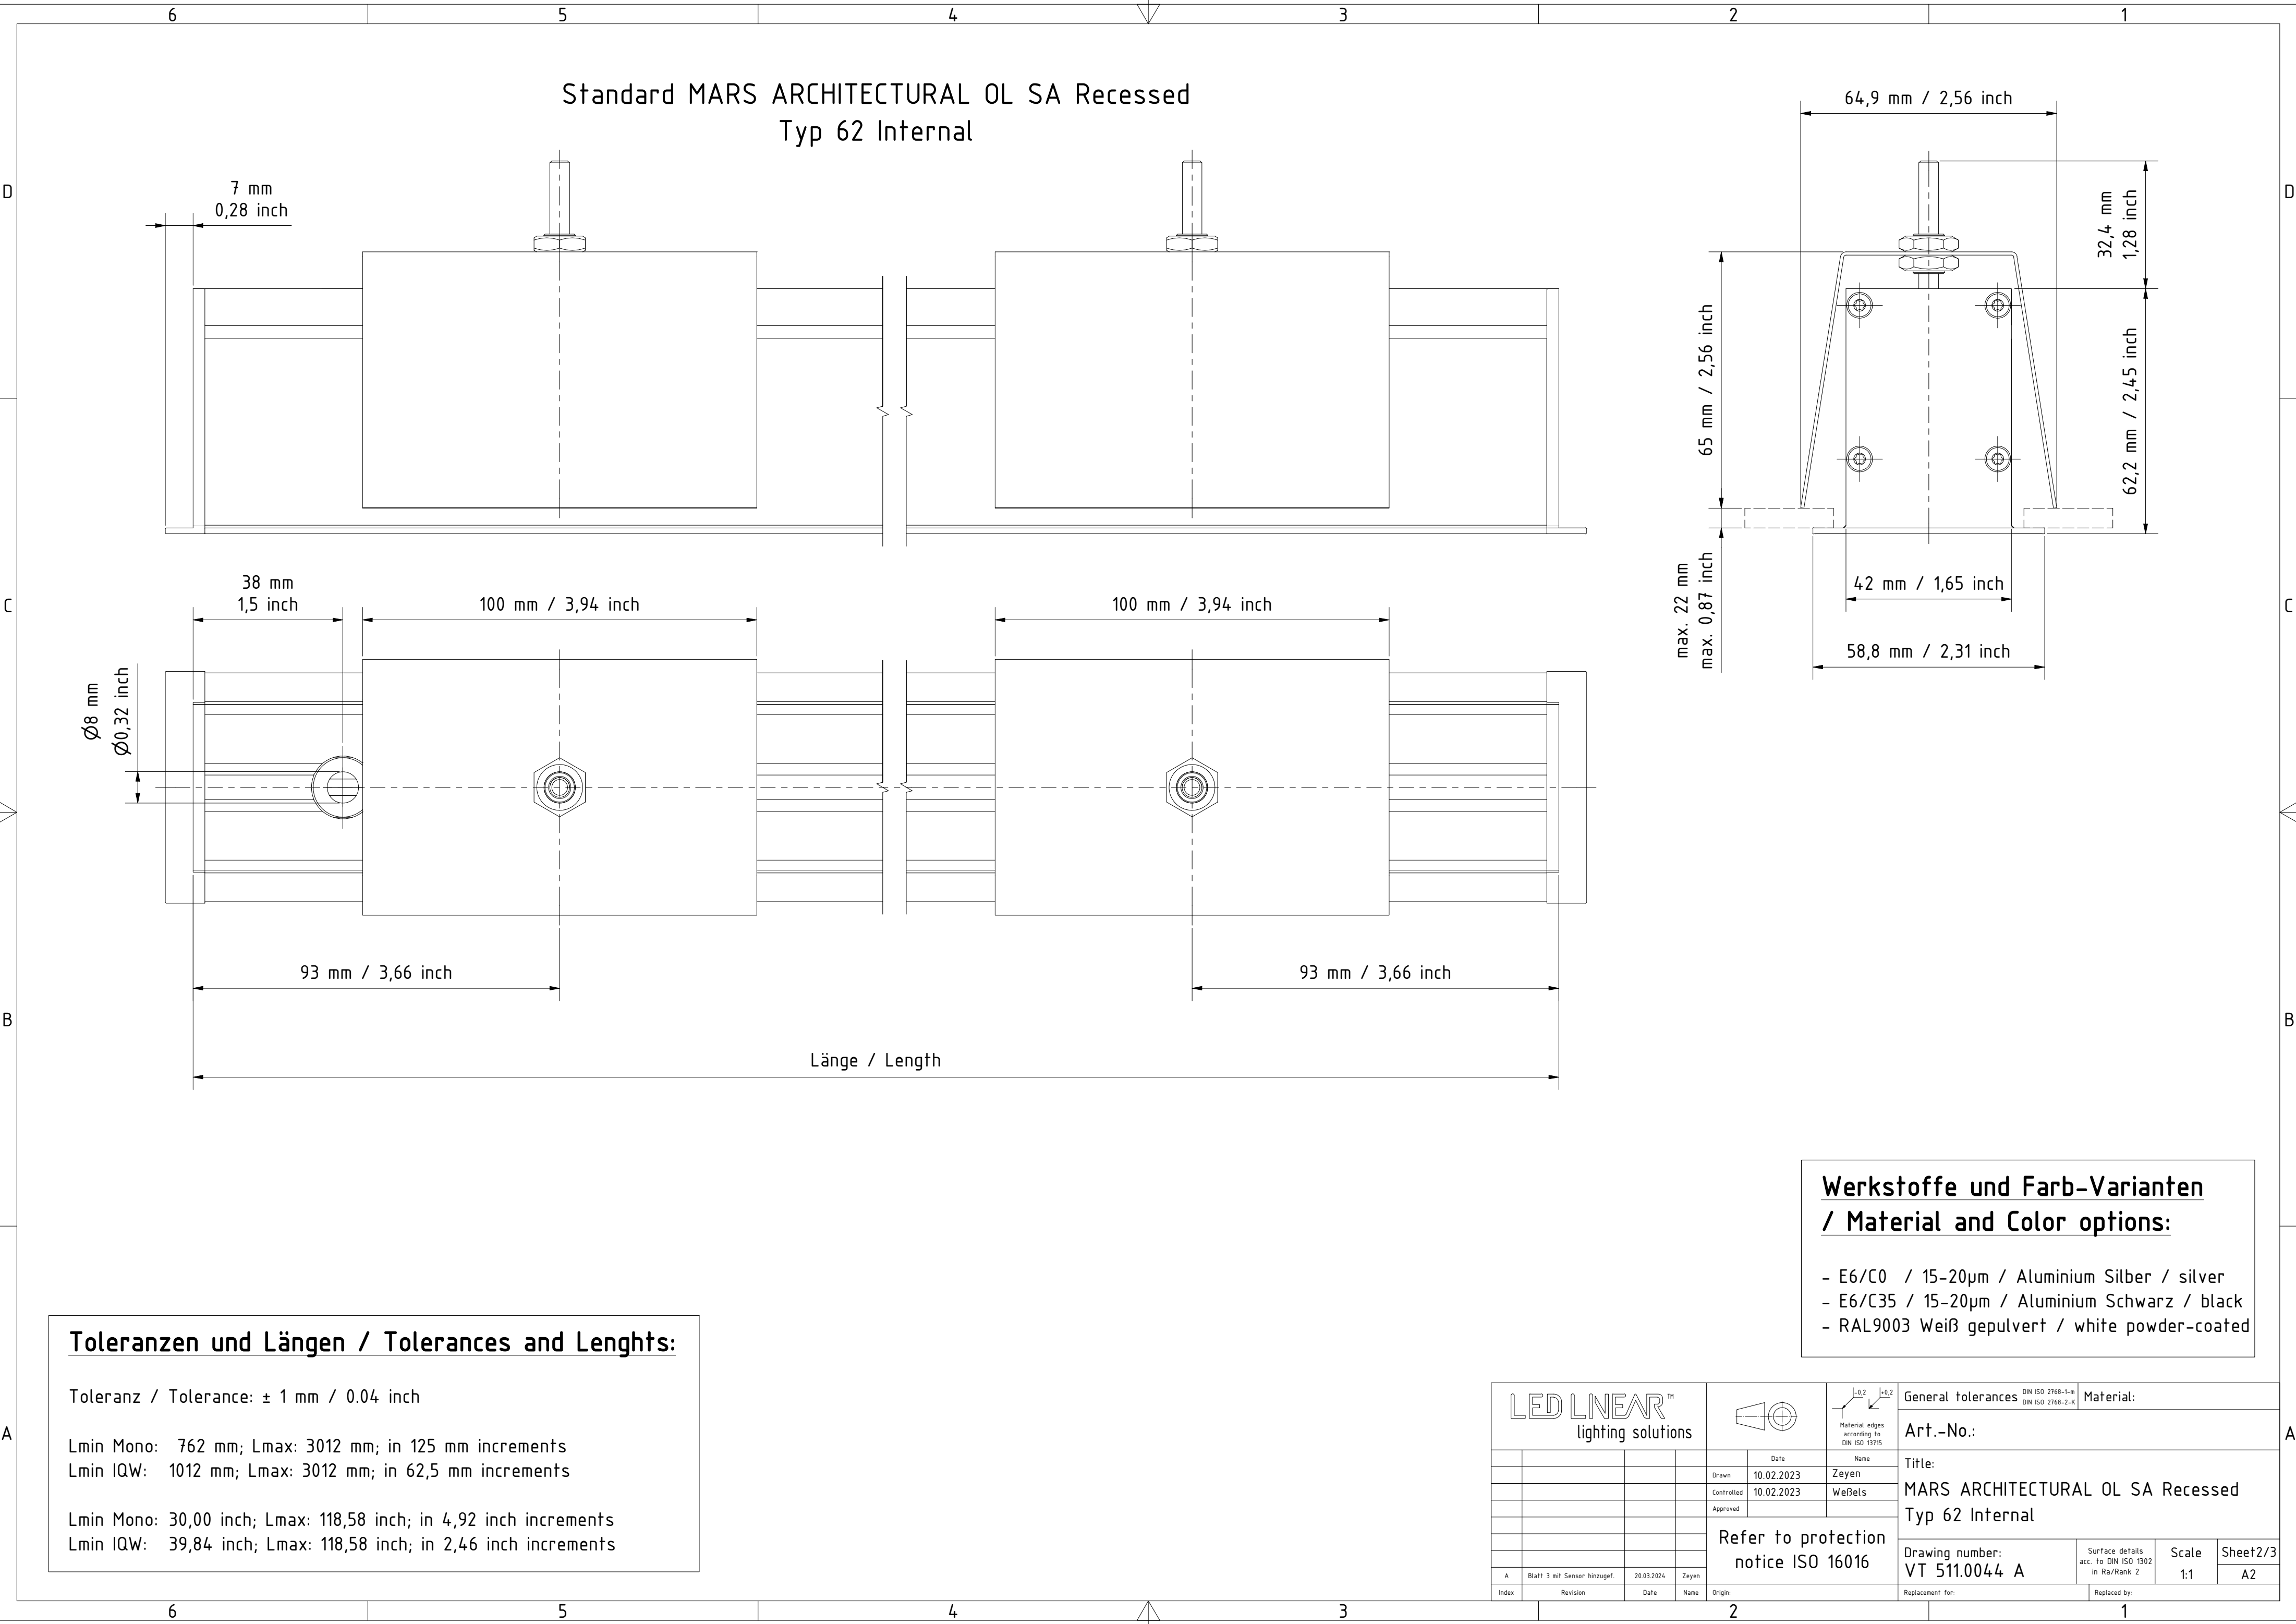

Toleranzen und Längen / Tolerances and Lenghts:



Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin Mono: 762 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 1012 mm; Lmax: 3012 mm; in 62,5 mm increments




Lmin Mono: 30,00 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 39,84 inch; Lmax: 118,58 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**


- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	10.02.2023	Zeyen		Art.-No.:				
				Controlled	10.02.2023	Weßels		Title:				
				Approved				MARS ARCHITECTURAL OL SA Recessed Typ 62 Internal				
				Refer to protection notice ISO 16016				Drawing number: VT 511.0044 A		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 1:1	Sheet2/3 A2
A	Blatt 3 mit Sensor hinzugef.		20.03.2024	Zeyen					Replacement for:		Replaced by:	
Index	Revision		Date	Name	Origin:							

Standard MARS ARCHITECTURAL OL SA Recessed
Typ 62 Internal with Sensor

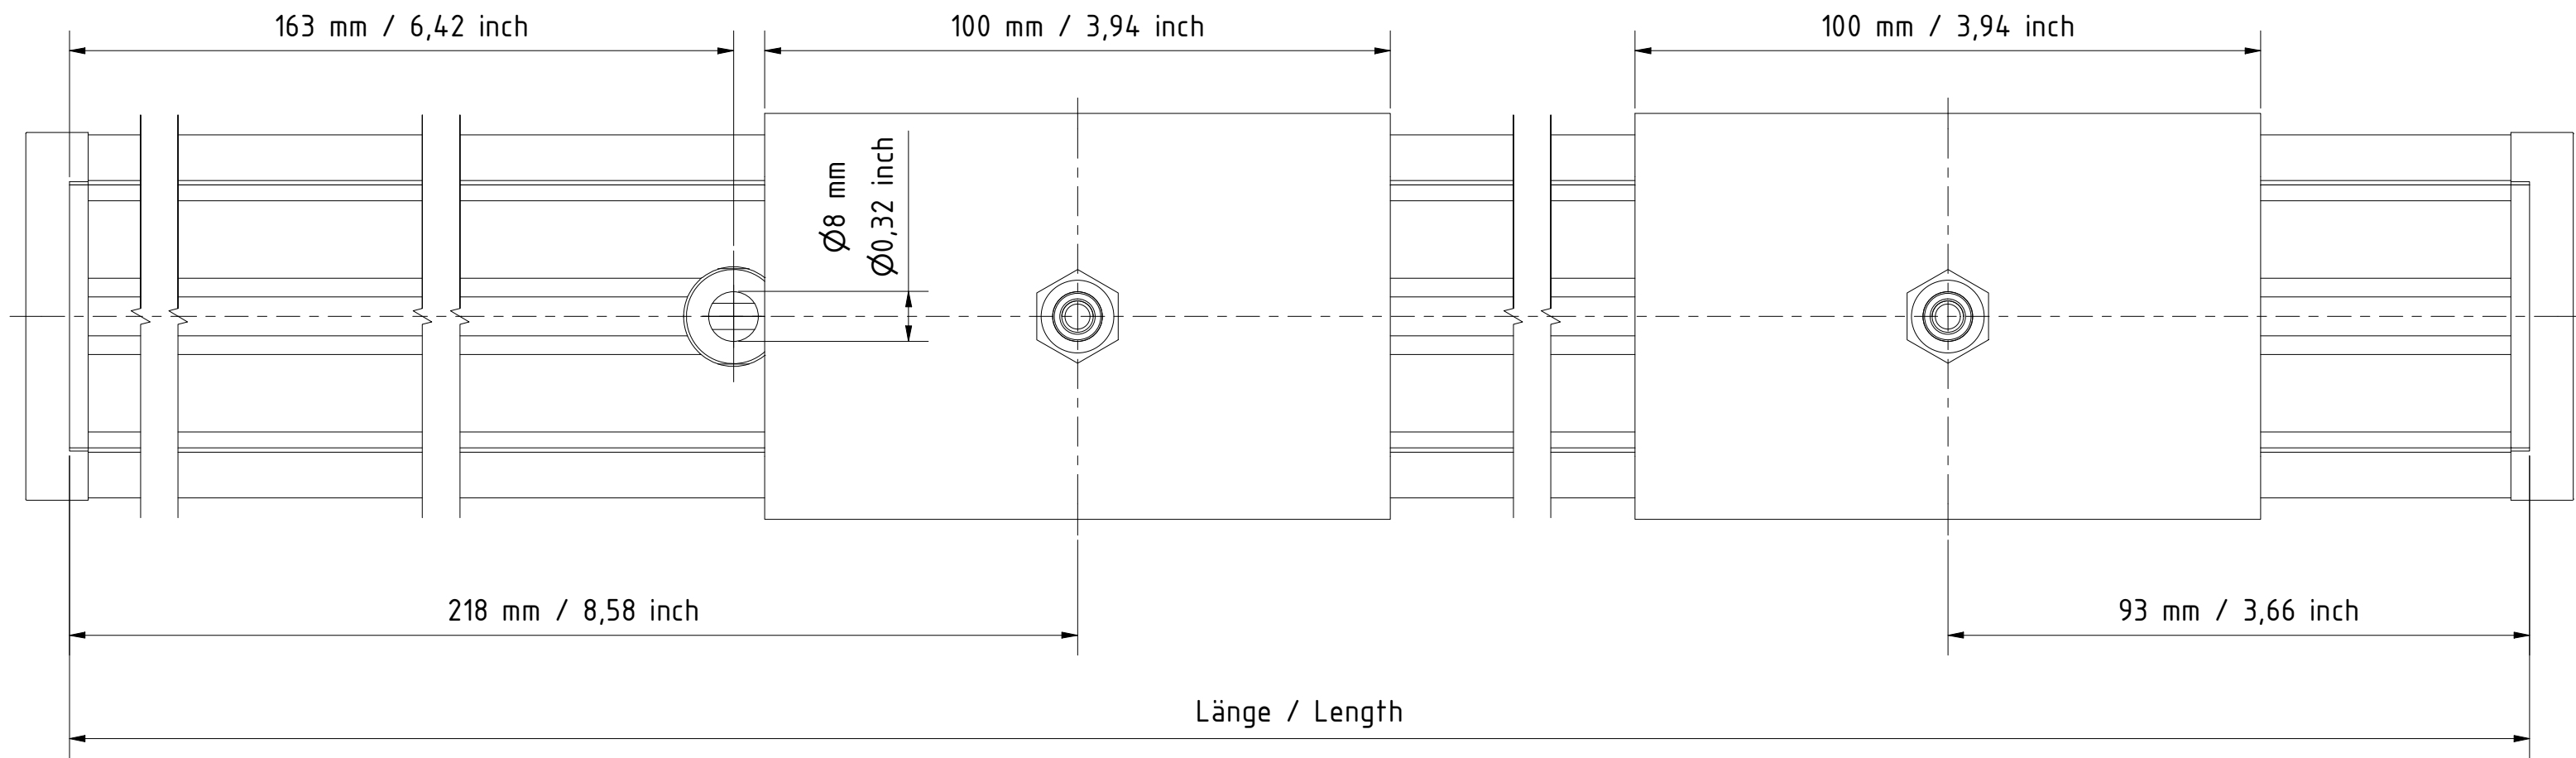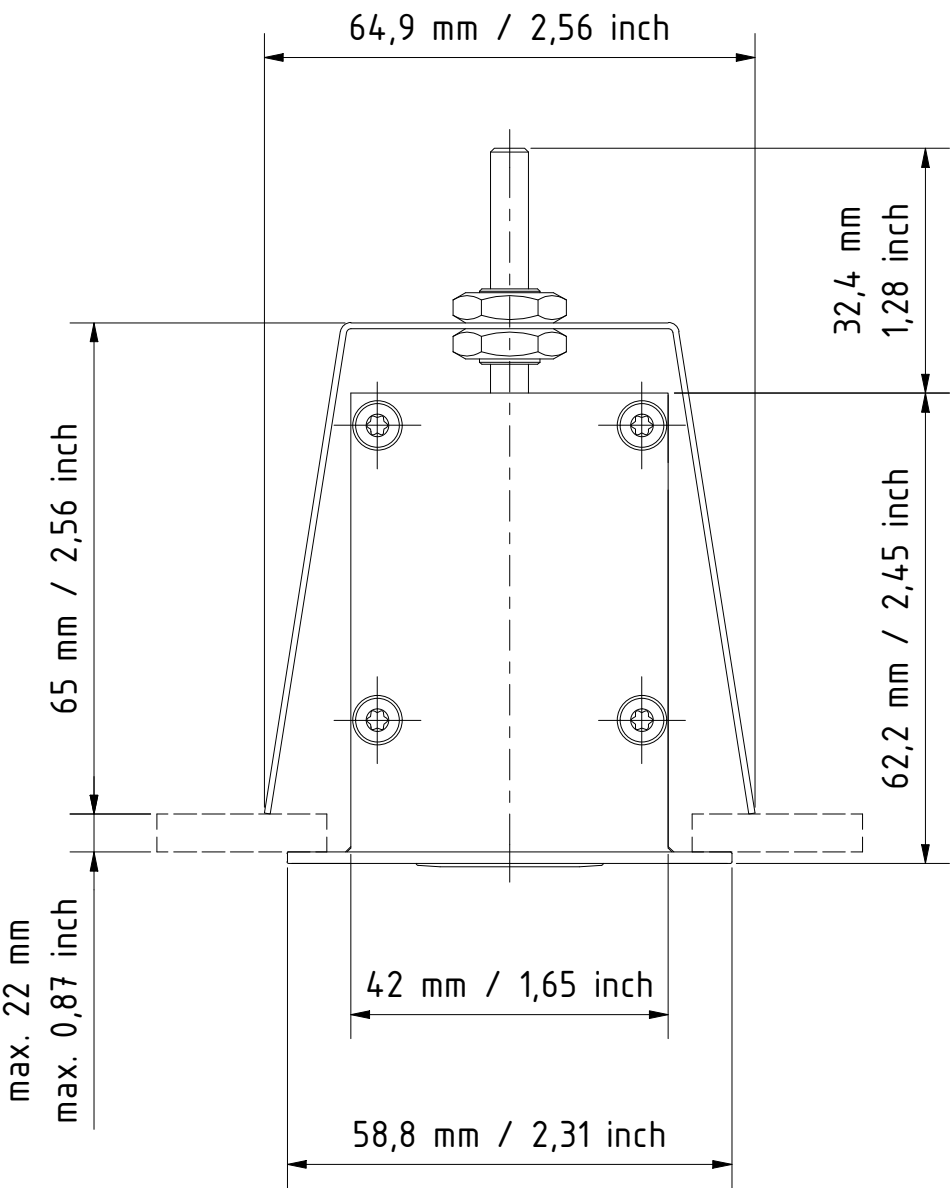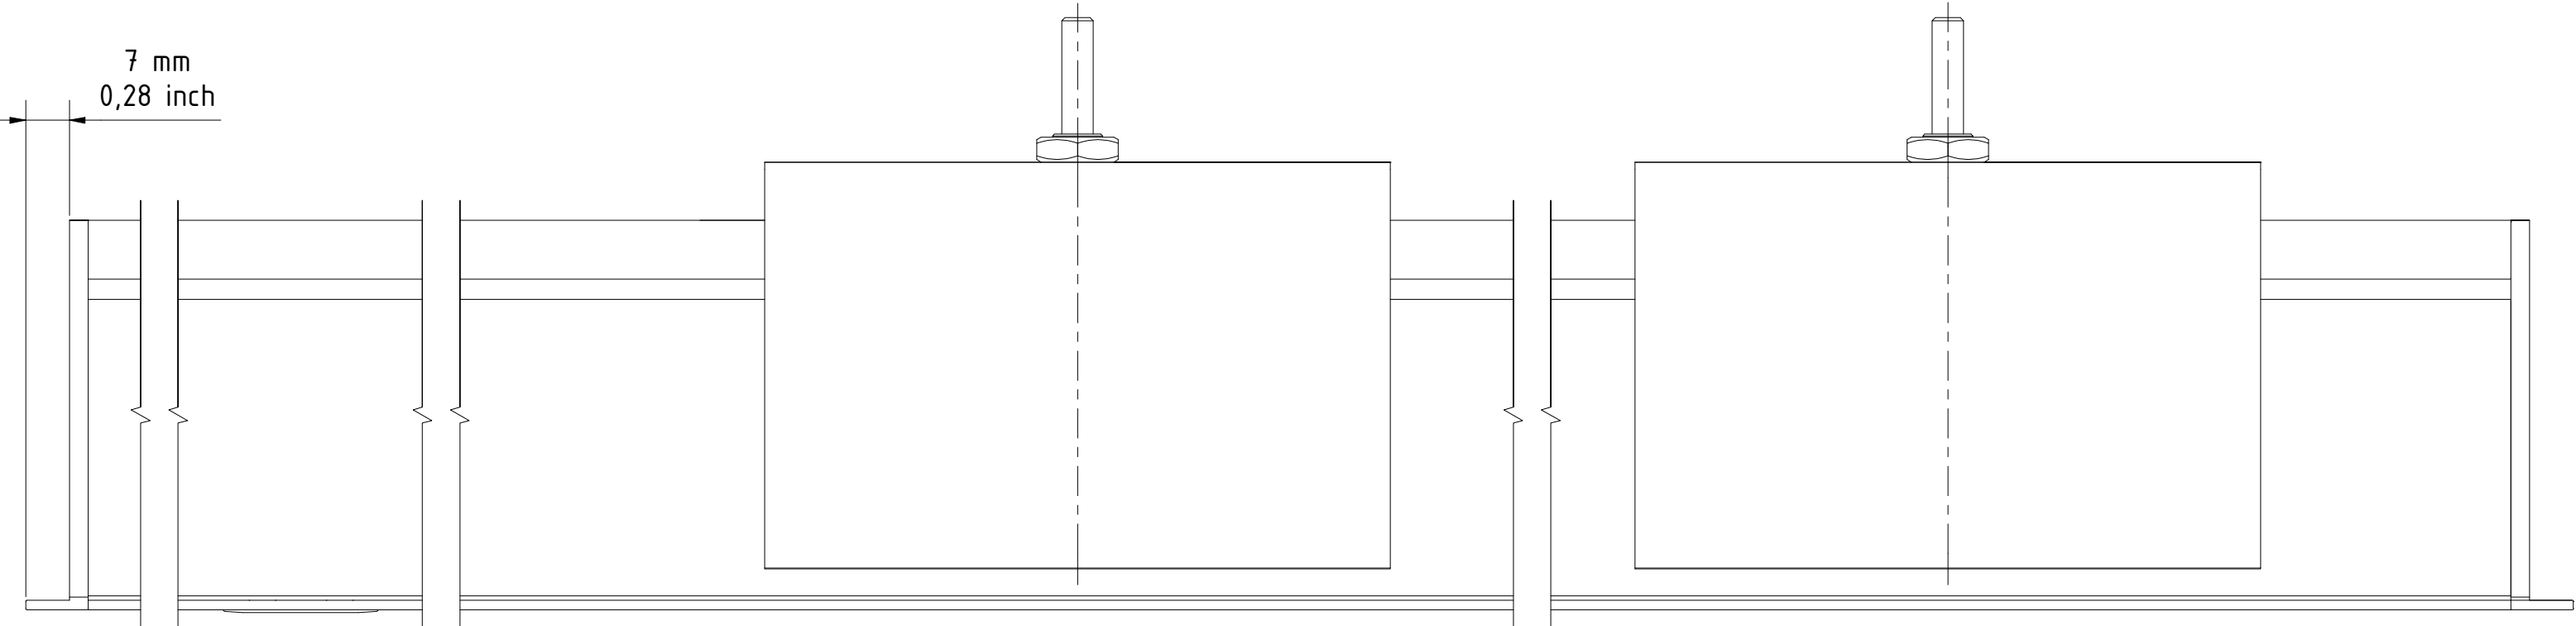

A (1 : 1,5)

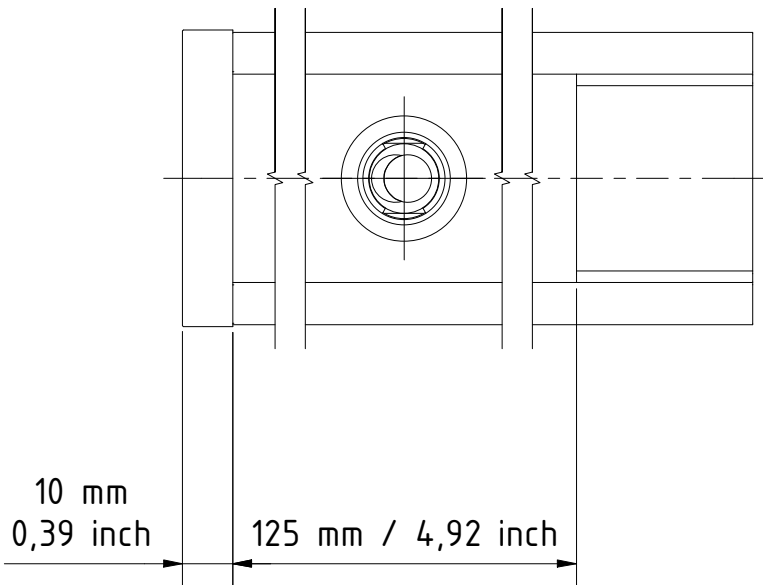

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 887 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 1137 mm; Lmax: 3012 mm; in 62,5 mm increments

Lmin Mono: 34,92 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 44,76 inch; Lmax: 118,58 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	10.02.2023	Zeyen		Art.-No.:				
				Controlled	10.02.2023	Weßels		Title:				
				Approved				MARS ARCHITECTURAL OL SA Recessed Typ 62 Internal with Sensor				
				Refer to protection notice ISO 16016					Drawing number: VT 511.0044 A			
									Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet3/3 A2
A	Blatt 3 mit Sensor hinzugef.	20.03.2024	Zeyen						Replacement for:		Replaced by:	
Index	Revision	Date	Name	Origin:								