


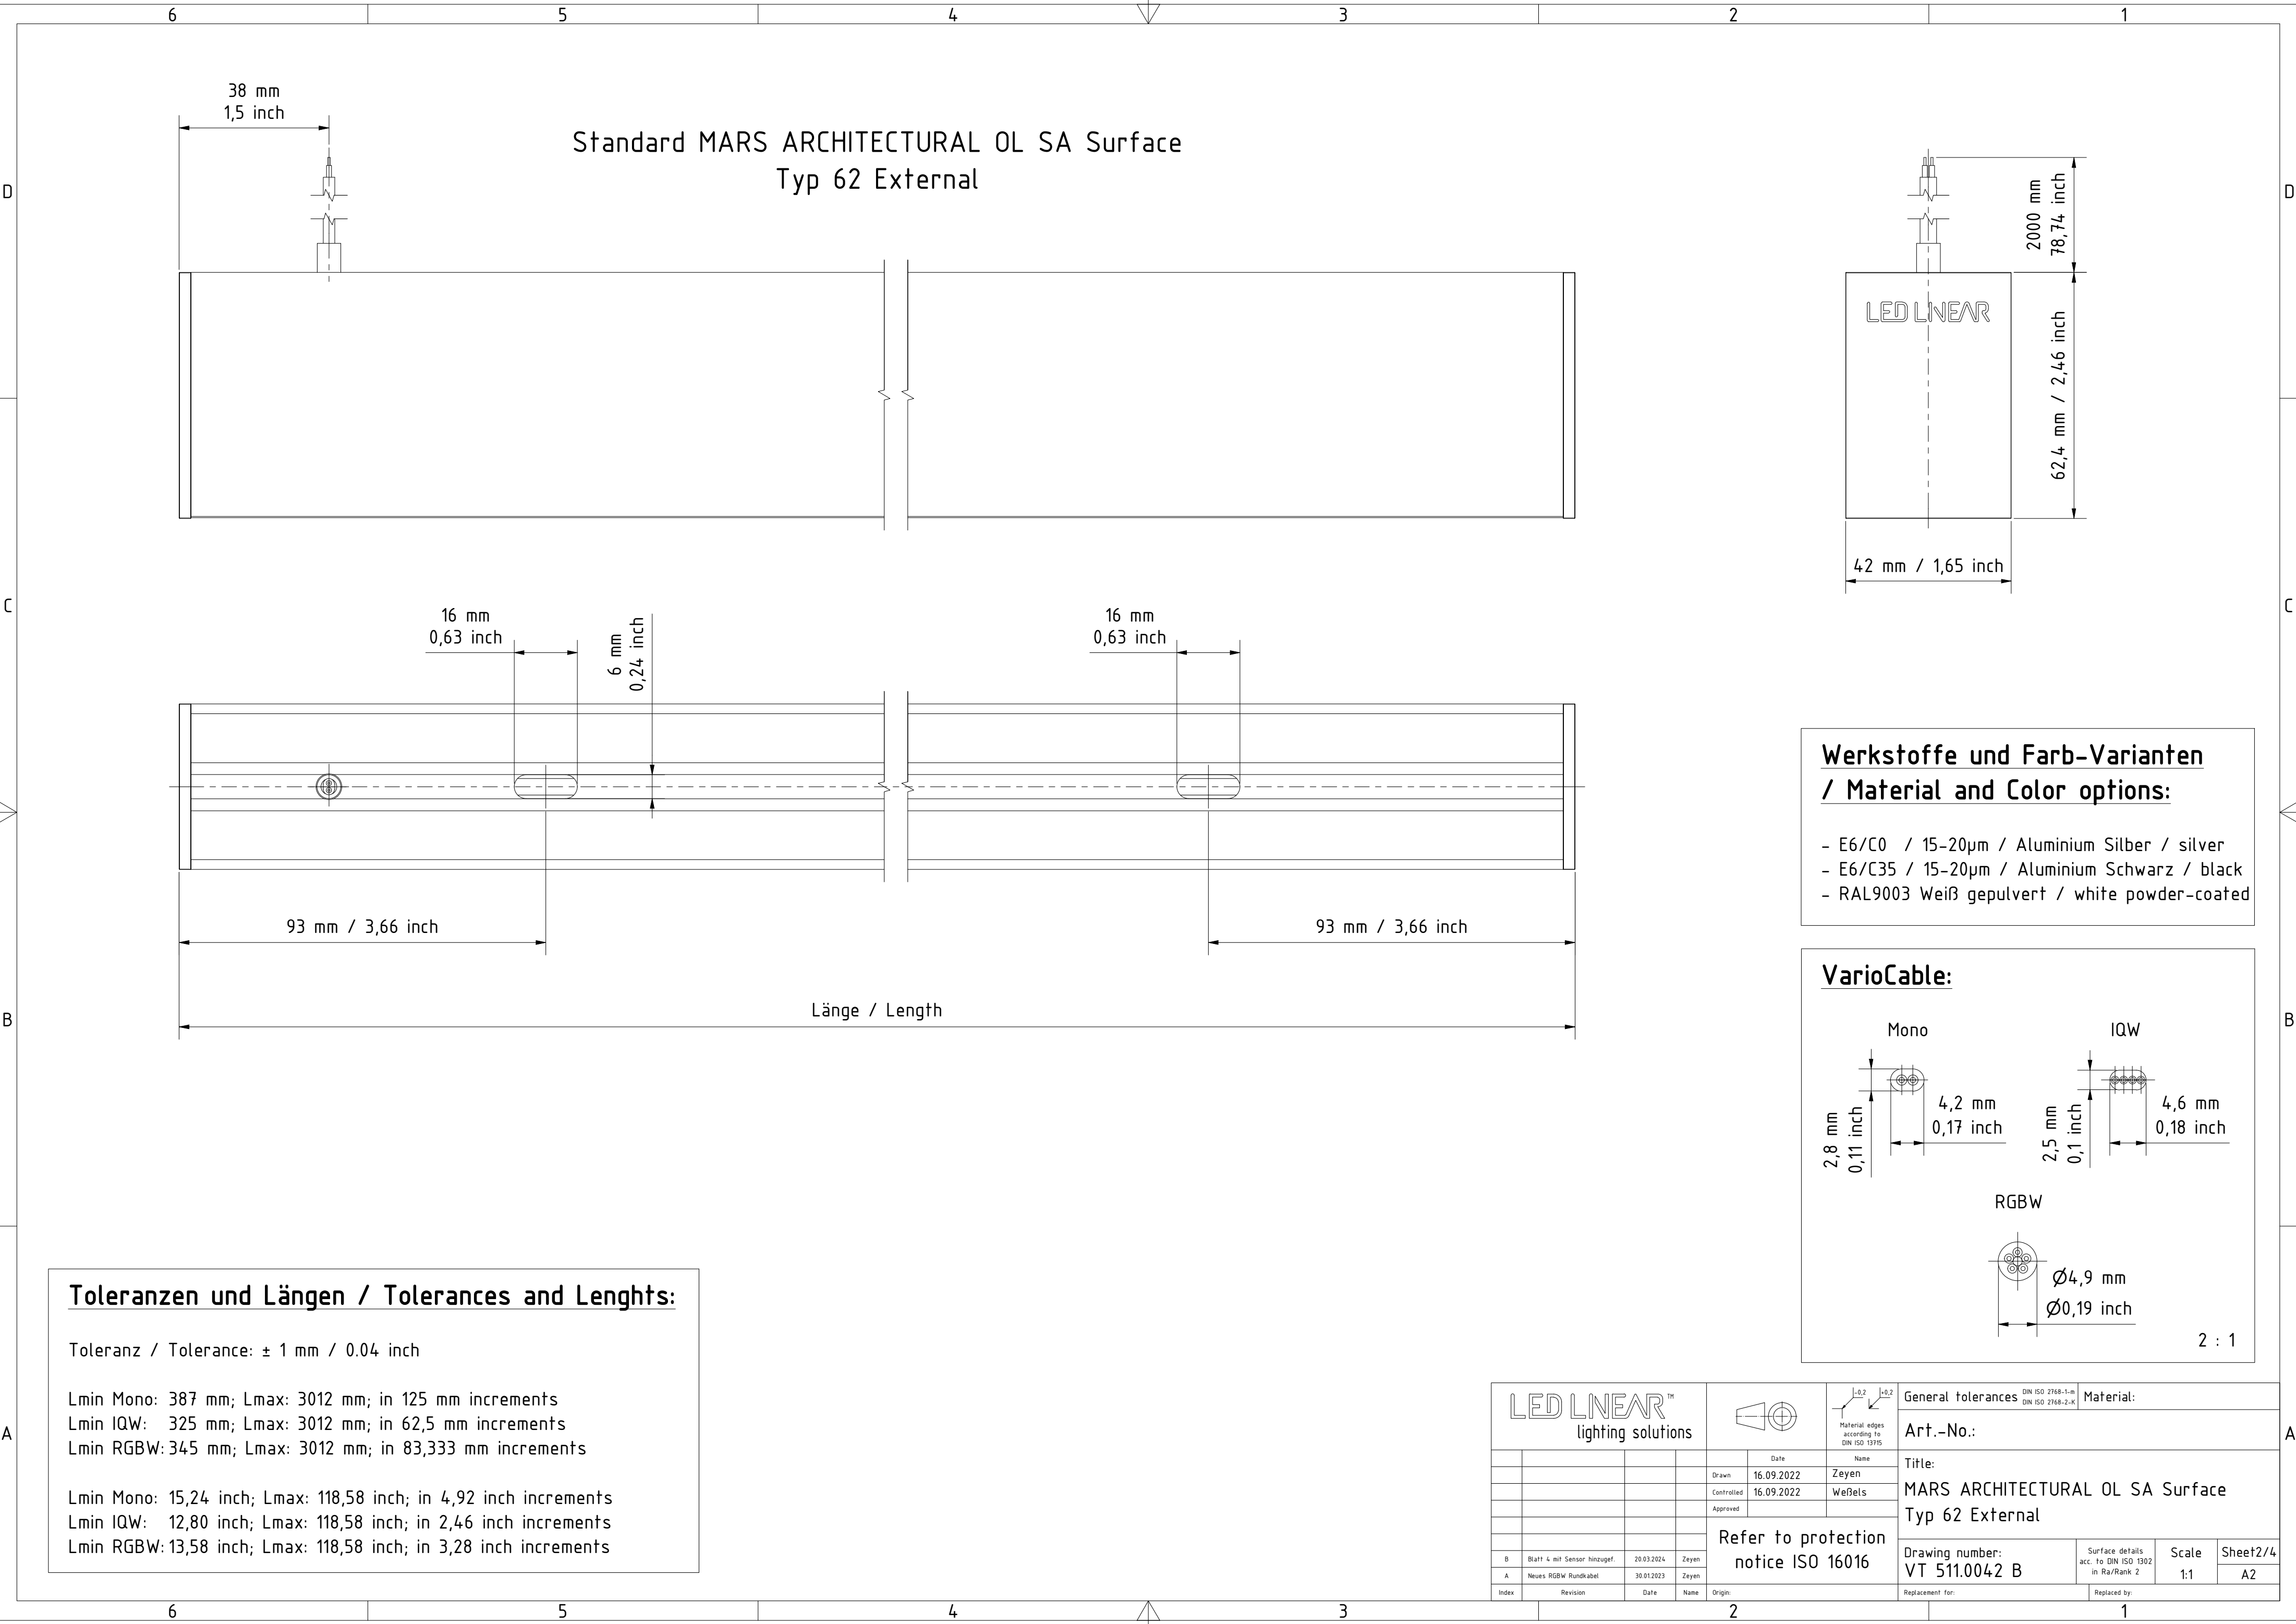

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 1 mm / 0.04 inch


Lmin Mono: 387 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 325 mm; Lmax: 3012 mm; in 62,5 mm increments
Lmin RGBW: 345 mm; Lmax: 3012 mm; in 83,333 mm increments



Lmin Mono: 15,24 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 12,80 inch; Lmax: 118,58 inch; in 2,46 inch increments
Lmin RGBW: 13,58 inch; Lmax: 118,58 inch; in 3,28 inch increments

Werkstoffe und Farb-Varianten / Material and Color options:



- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

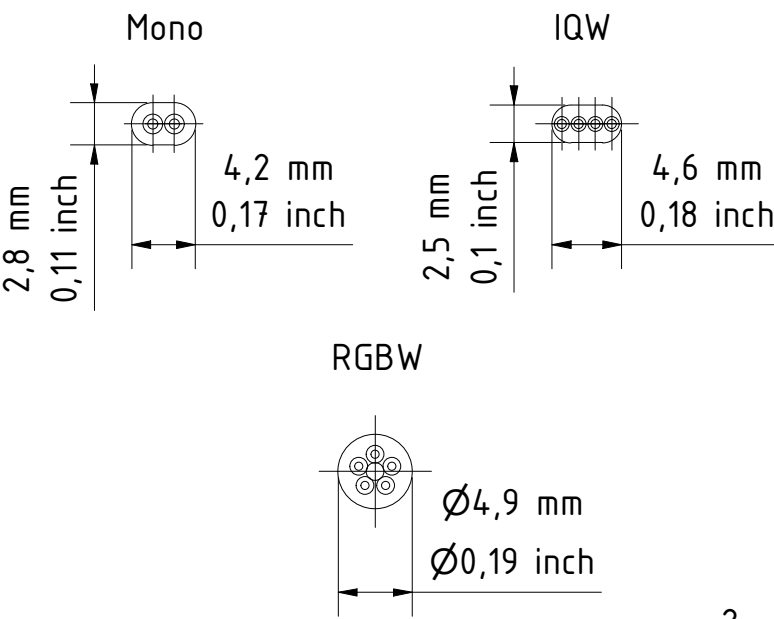

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:				
								Art.-No.:						
				Date		Name		Title:						
				Drawn		16.09.2022		Zeyen		MARS ARCHITECTURAL OL SA Surface				
				Controlled		16.09.2022		Weßels		Typ 62 External				
				Approved										

Standard MARS ARCHITECTURAL OL SA Surface
Typ 62 Internal

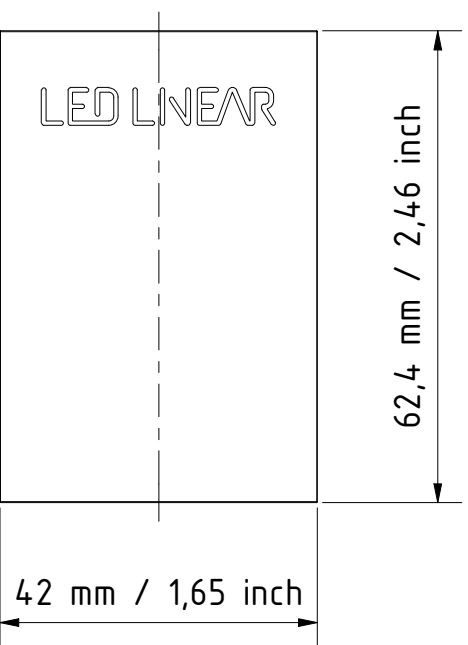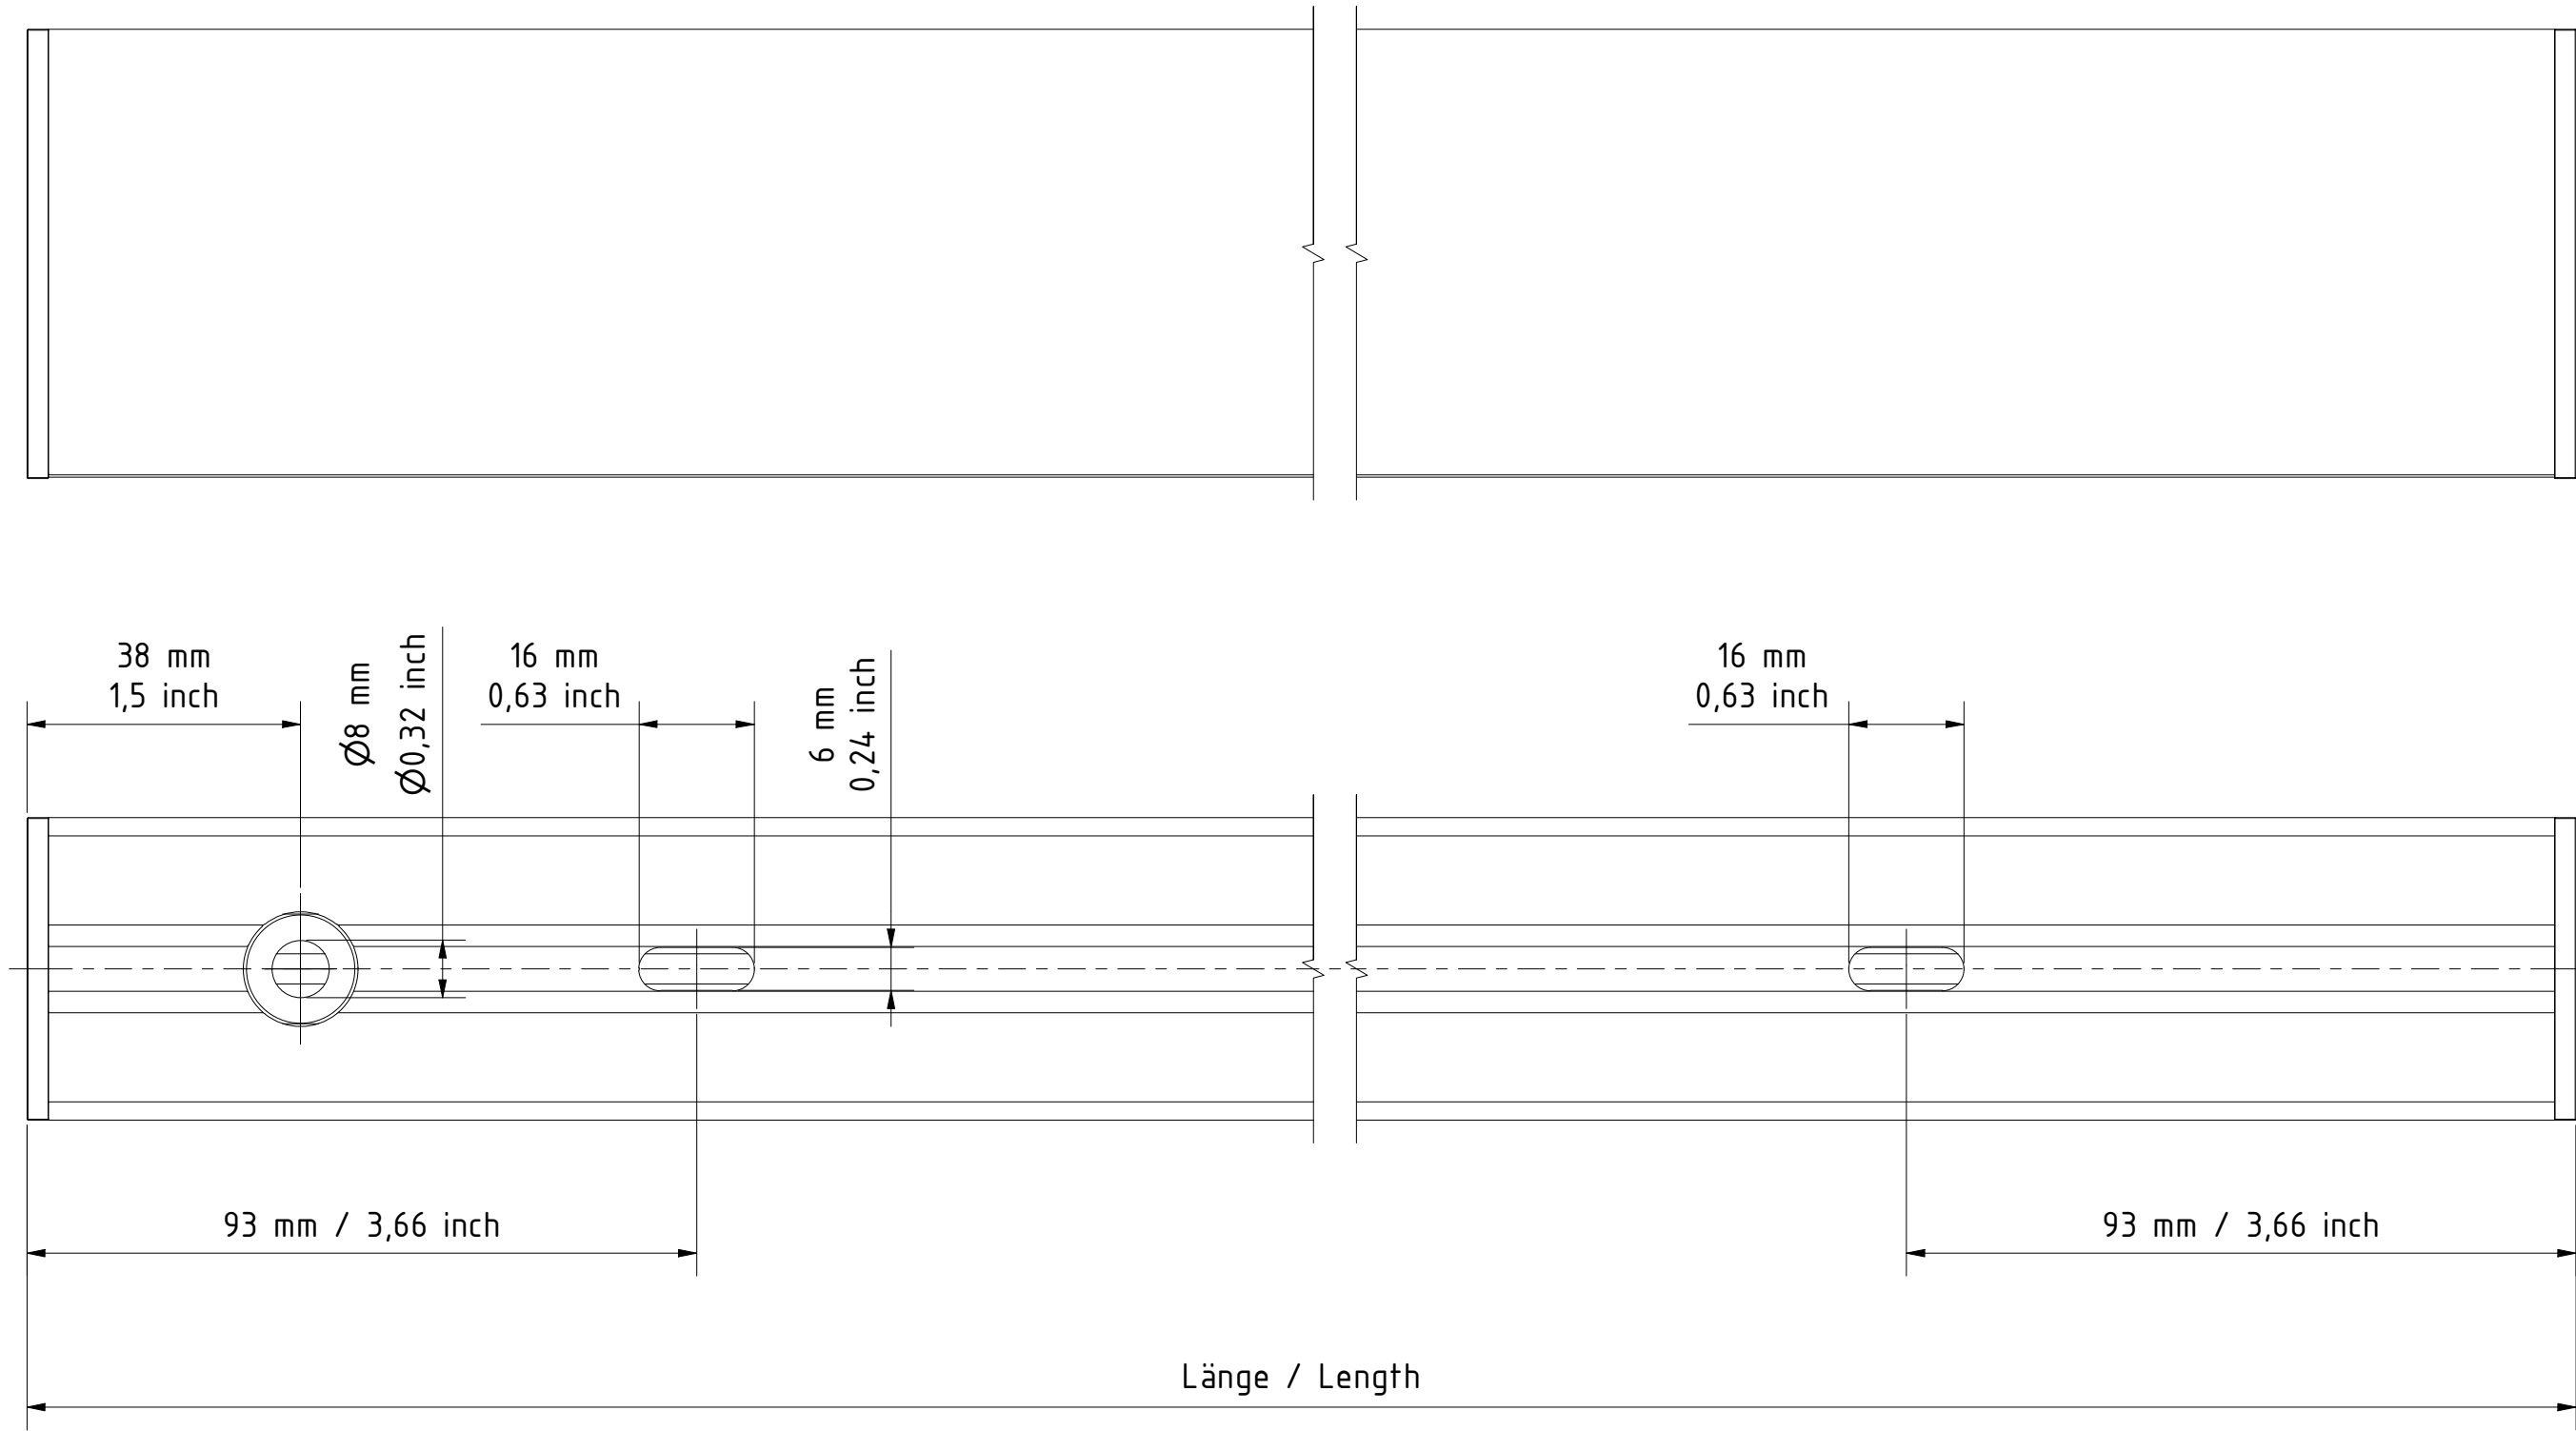

Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch

Lmin Mono: 762 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 1012 mm; Lmax: 3012 mm; in 62,5 mm increments




Lmin Mono: 30,00 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 39,84 inch; Lmax: 118,58 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
								Art.-No.:				
					Date	Name		Title:				
					Drawn	16.09.2022		Zeyen		MARS ARCHITECTURAL OL SA Surface		
					Controlled	16.09.2022		Weßels		Typ 62 Internal		
					Approved					Drawing number: VT 511.0042 B		
					Refer to protection notice ISO 16016				Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1:1	Sheet3/4 A2
B	Blatt 4 mit Sensor hinzugef.		20.03.2024	Zeyen								
A	Neues RGBW Rundkabel		30.01.2023	Zeyen								
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:			

Standard MARS ARCHITECTURAL OL SA Surface
Typ 62 Internal with Sensor

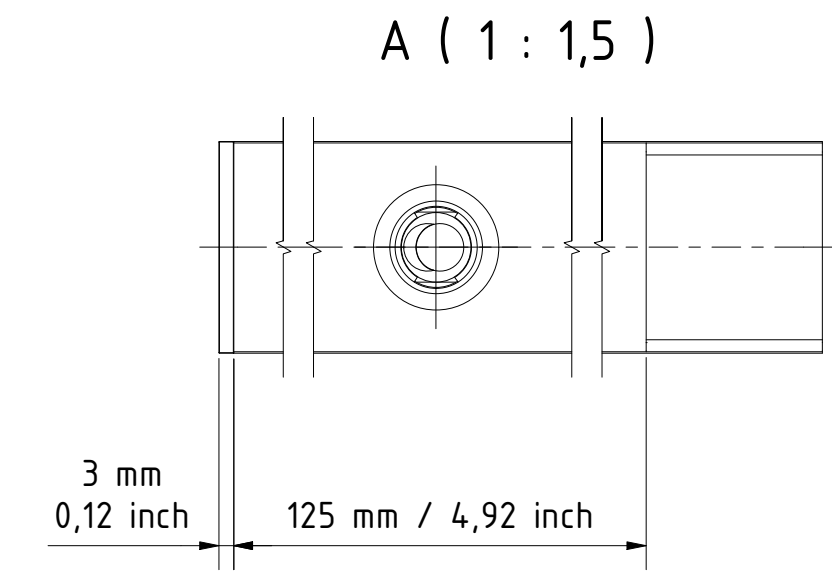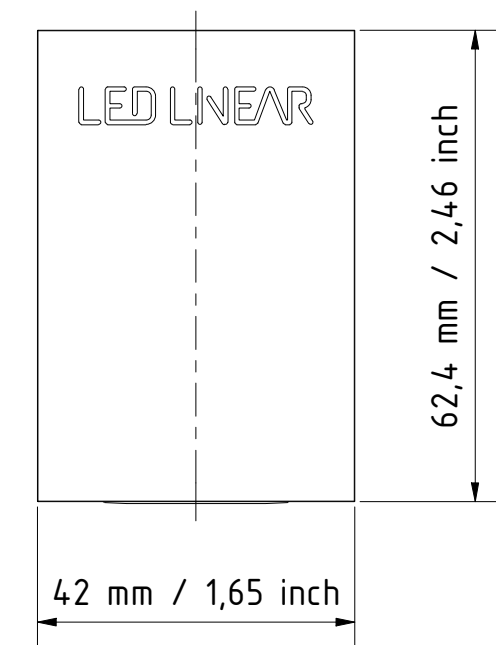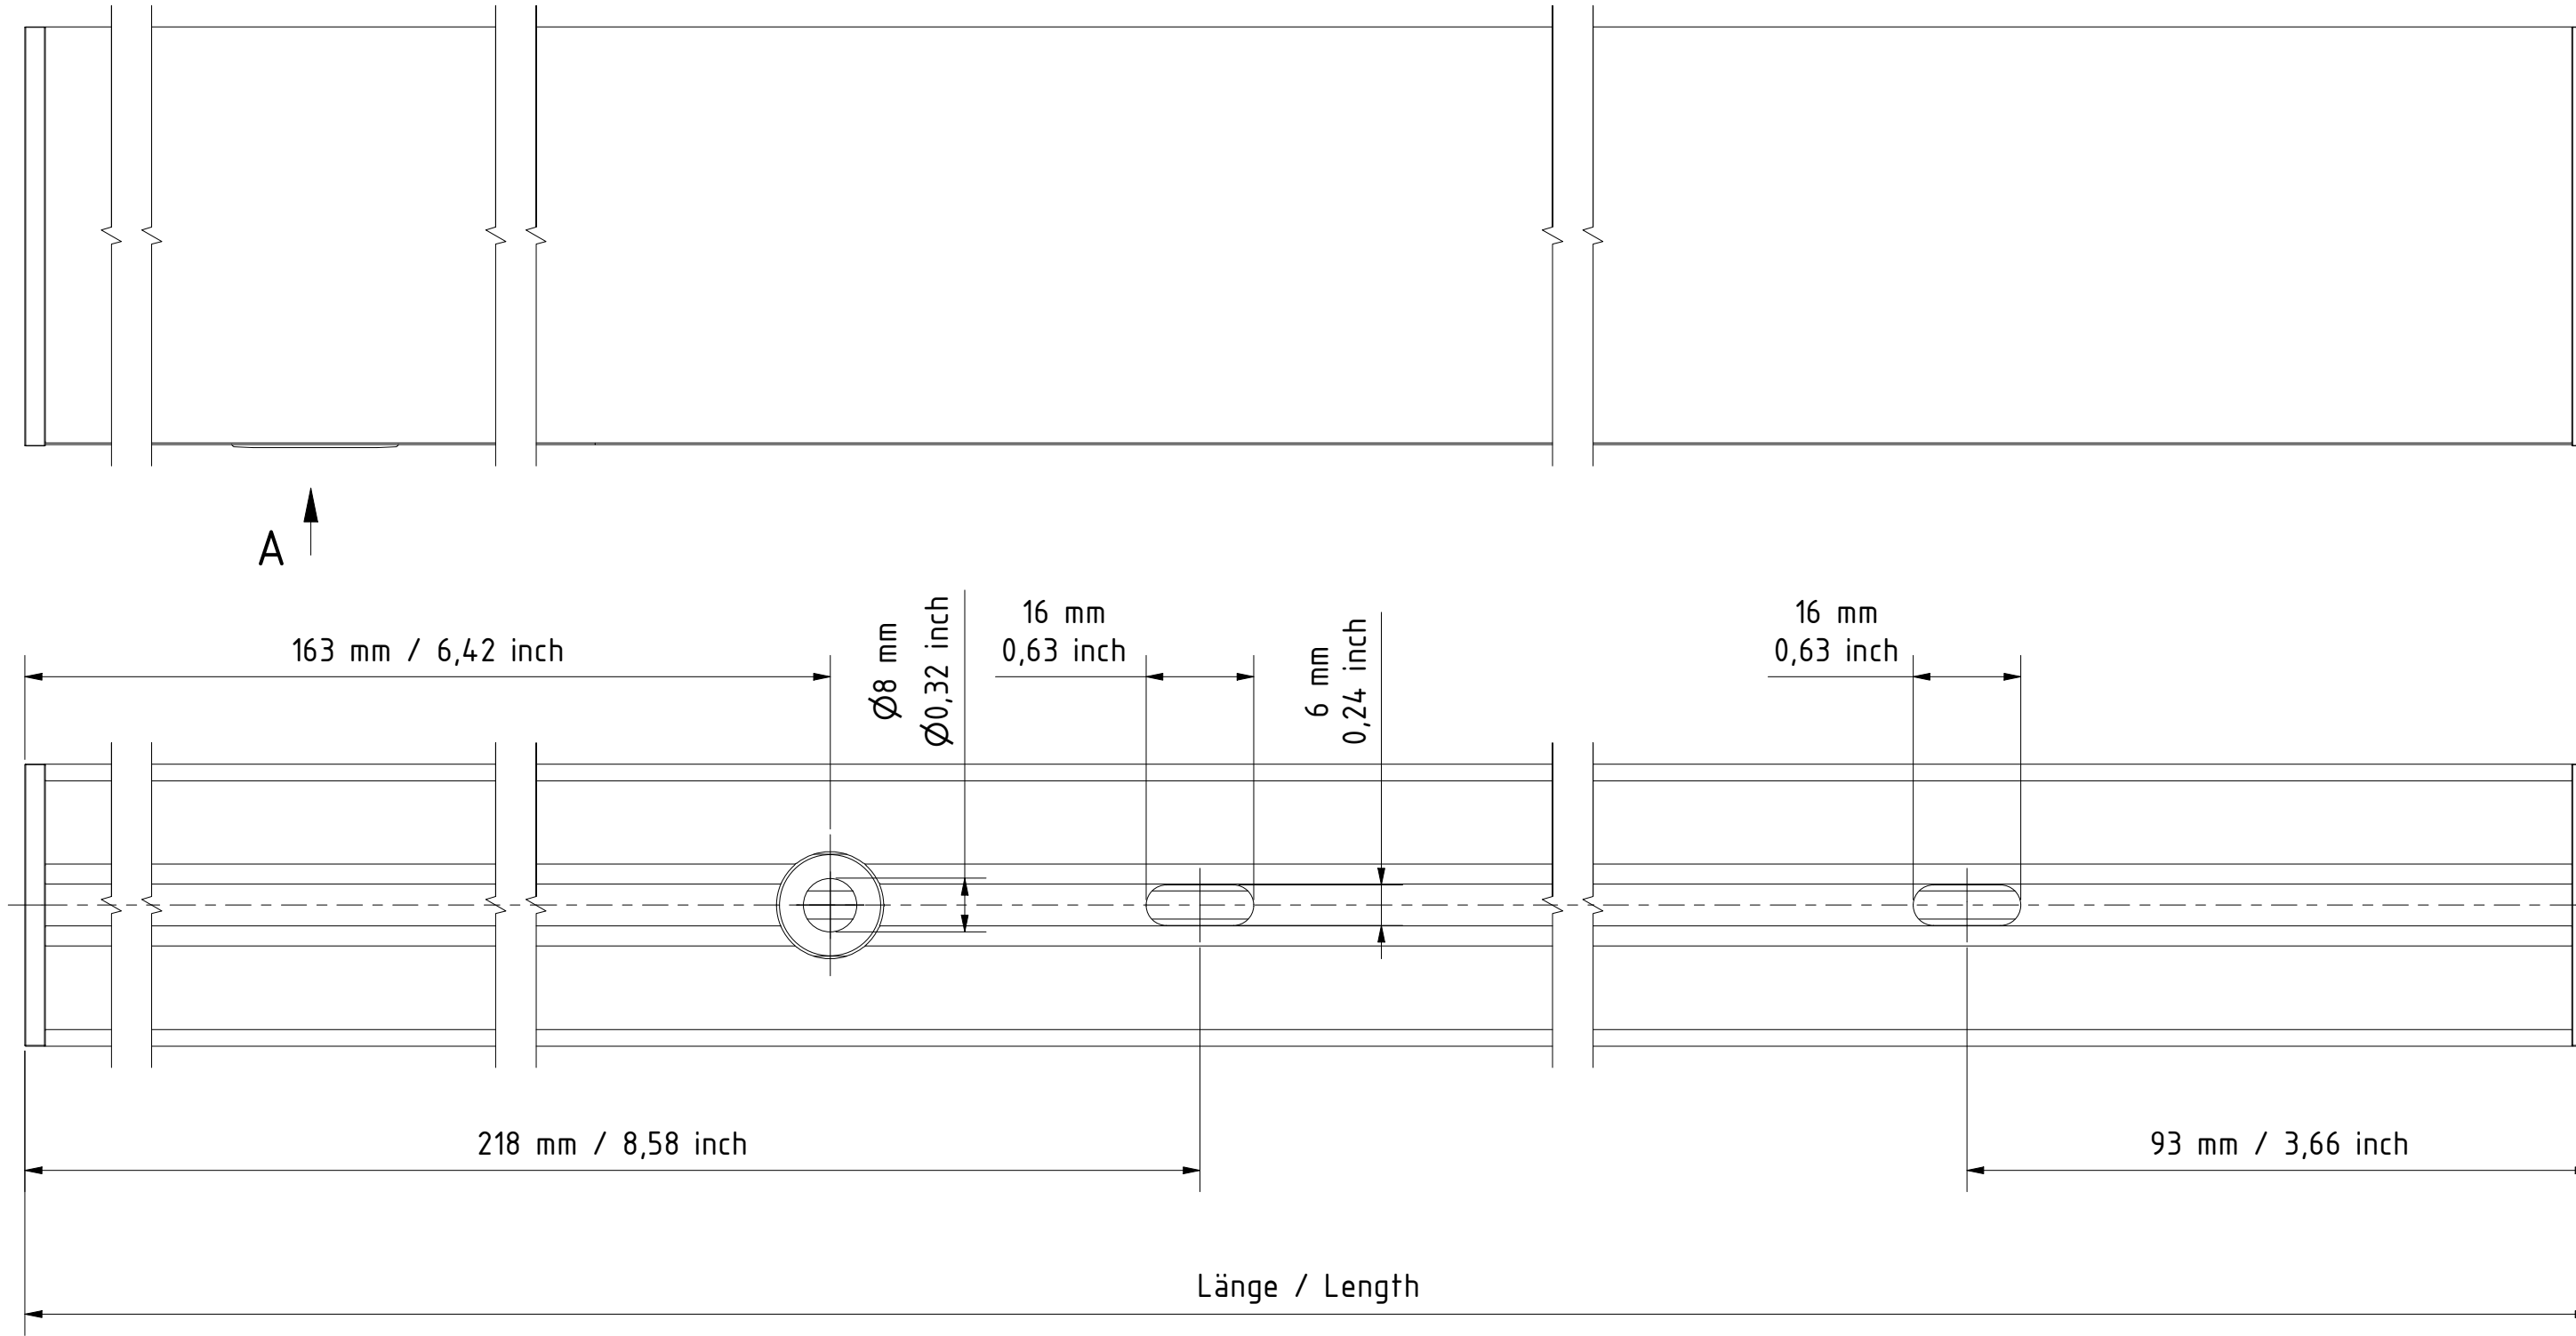

Toleranzen und Längen / Tolerances and Lenghts:



Toleranz / Tolerance: $\pm 1 \text{ mm} / 0.04 \text{ inch}$

Lmin Mono: 887 mm; Lmax: 3012 mm; in 125 mm increments
Lmin IQW: 1137 mm; Lmax: 3012 mm; in 62,5 mm increments

Lmin Mono: 34,92 inch; Lmax: 118,58 inch; in 4,92 inch increments
Lmin IQW: 44,76 inch; Lmax: 118,58 inch; in 2,46 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- E6/C35 / 15-20 μm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
								Art.-No.:			
				Date		Name		Title:			
				Drawn		16.09.2022		Zeyen		MARS ARCHITECTURAL OL SA Surface	
				Controlled		16.09.2022		Weßels		Typ 62 Internal with Sensor	
				Approved							