Standard NEPTUNE 3.0 IP68

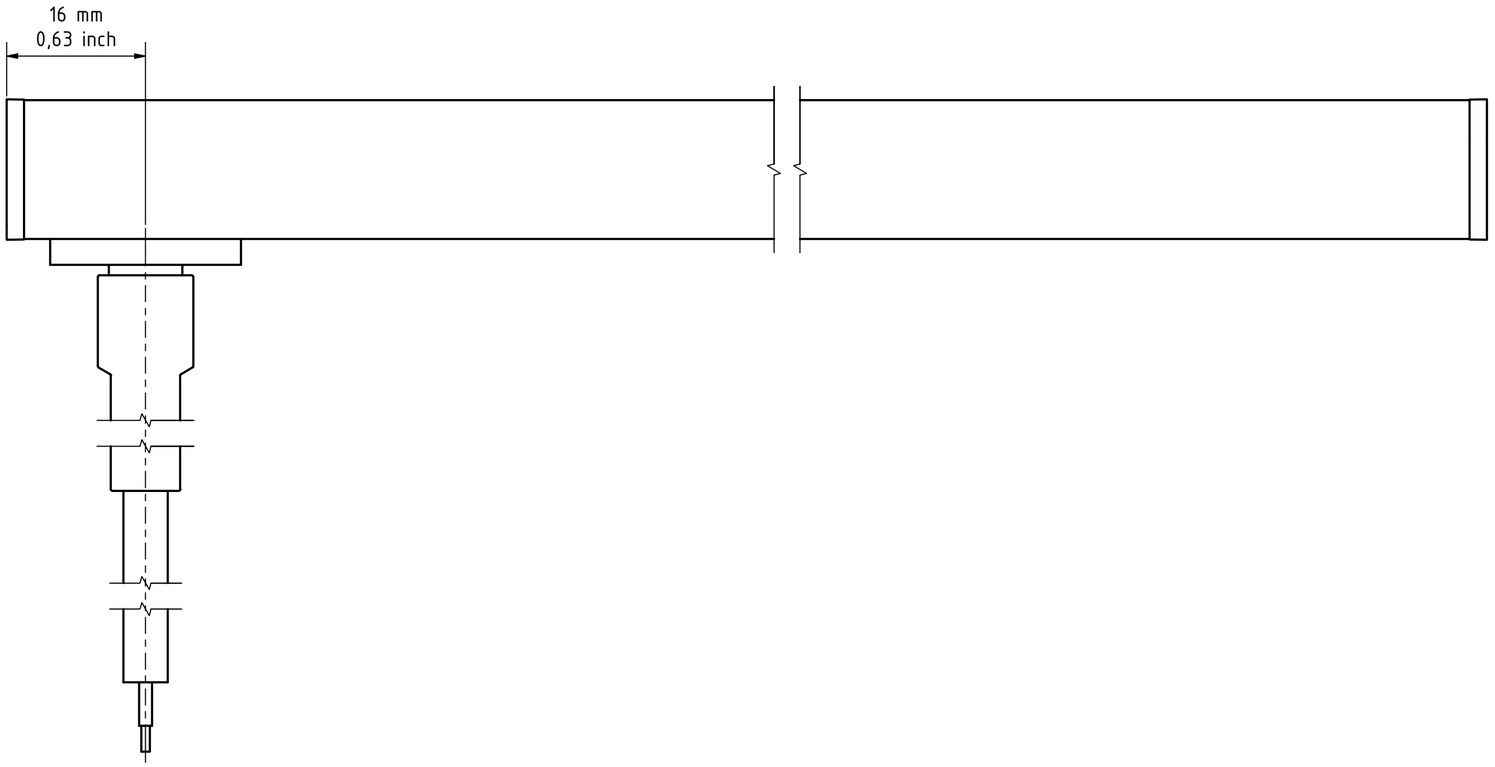

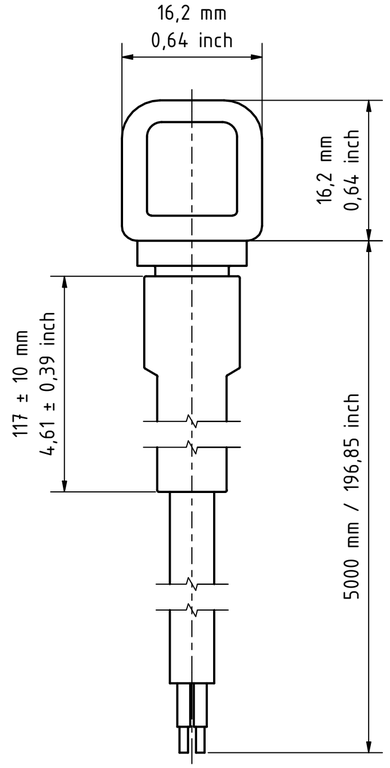

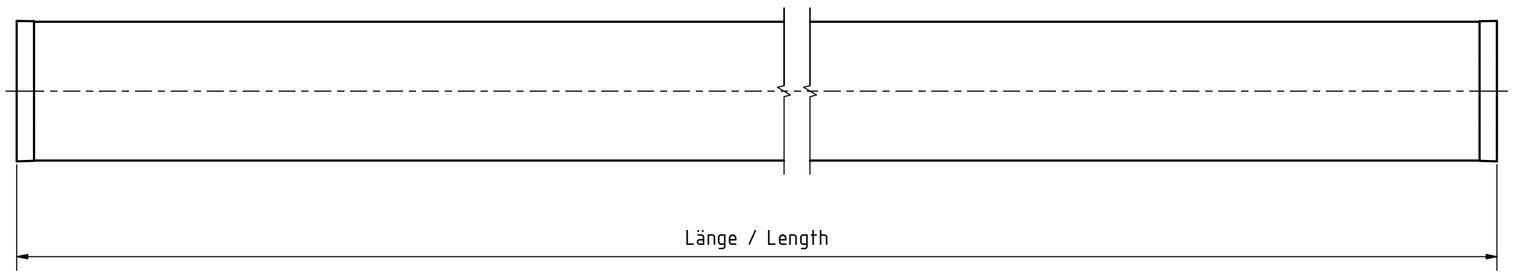

Connection Cable:

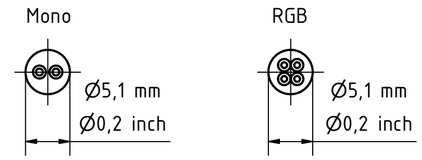

2 : 1

Toleranzen und Längen / Tolerances and Lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin: 555 mm; Lmax: 4055 mm; in 62,5 mm increments
Lmin: 21,85 inch; Lmax: 159,65 inch; in 2,46 inch increments

LED LINEAR™
A Fagerhult Group Company

Material edges according to DIN ISO 13715

	Date	Name
Drawn	28.11.2025	Zeyen
Controlled	28.11.2025	Weßels
Approved		

Refer to protection notice ISO 16016

Index	Revision	Date	Name

General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K

Material:

Art.-No.:

Title:
NEPTUNE 3.0 IP68

Drawing number:
VT 366.0003

Surface details acc. to DIN ISO 1302 in Ra/Rank 2

Scale 2 : 1

Sheet 1/2
A2

Standard NEPTUNE 3.0 IP68
Einbau mit Clip für Pools / Recessed with Clip for Pools (CLS) / 13000050-01

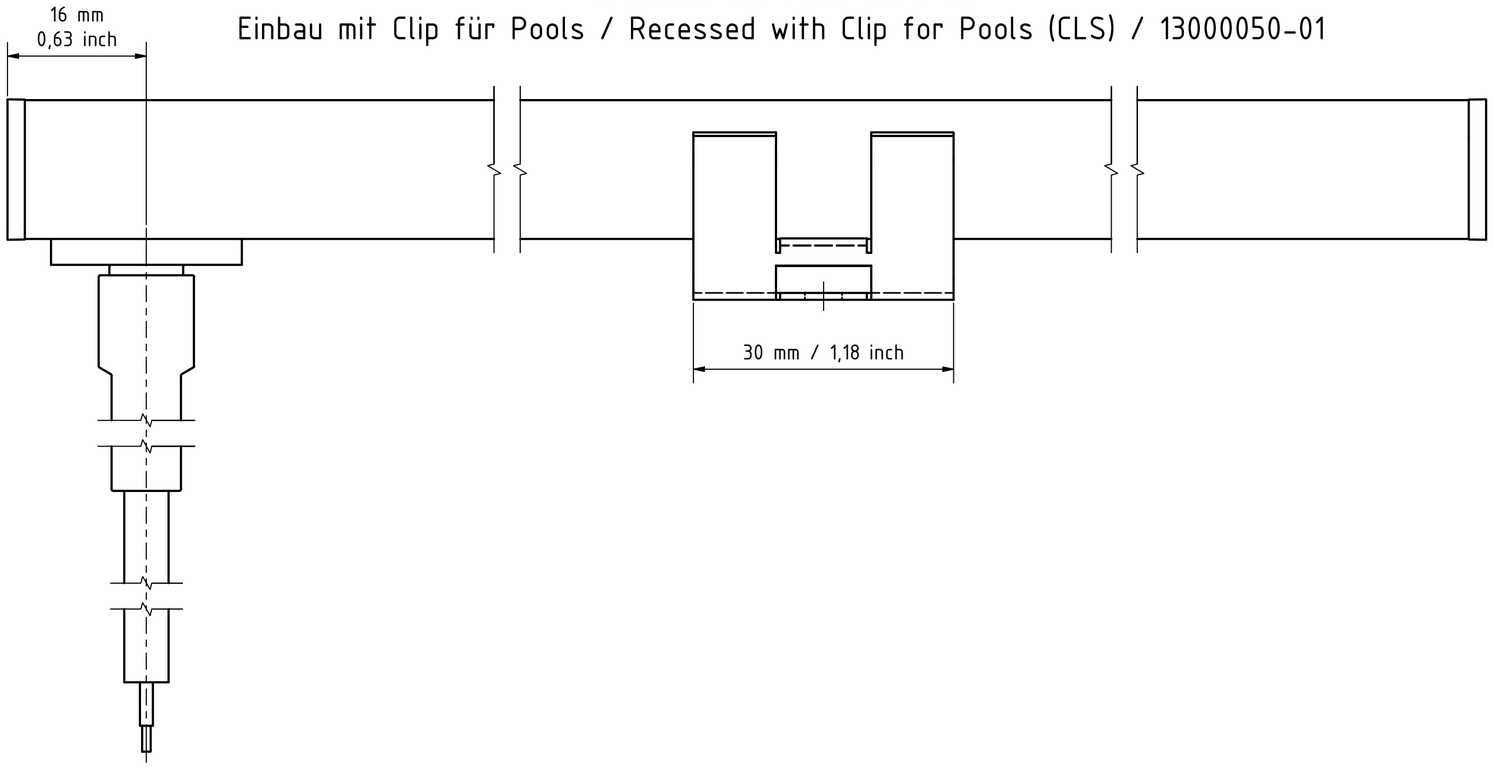

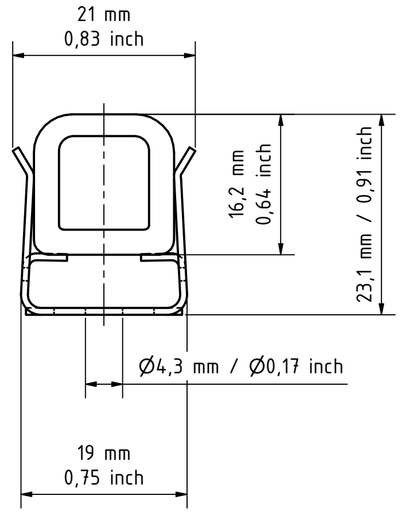

Werkstoffe und Farb-Varianten / Material and Color options:

Art.-#: 13000050-01
- 1.4404 / V4a / Edelstahl / Stainless steel

LED LINEAR™
A Fagerhult Group Company

Material edges according to DIN ISO 13715

	Date	Name
Drawn	28.11.2025	Zeyen
Controlled	28.11.2025	Weßels
Approved		

Refer to protection notice ISO 16016

Index	Revision	Date	Name

General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K

Material:

Art.-No.:

Title:
NEPTUNE 3.0 IP68

Drawing number:
VT 366.0003

Surface details acc. to DIN ISO 1302 in Ra/Rank 2

Scale 2 : 1

Sheet 2/2

A2