

Standard ULTIMA IP40
Einbau mit Rahmen / Recessed with Trim (R)
mit zwei Steckverbindern / with two connectors (DC)

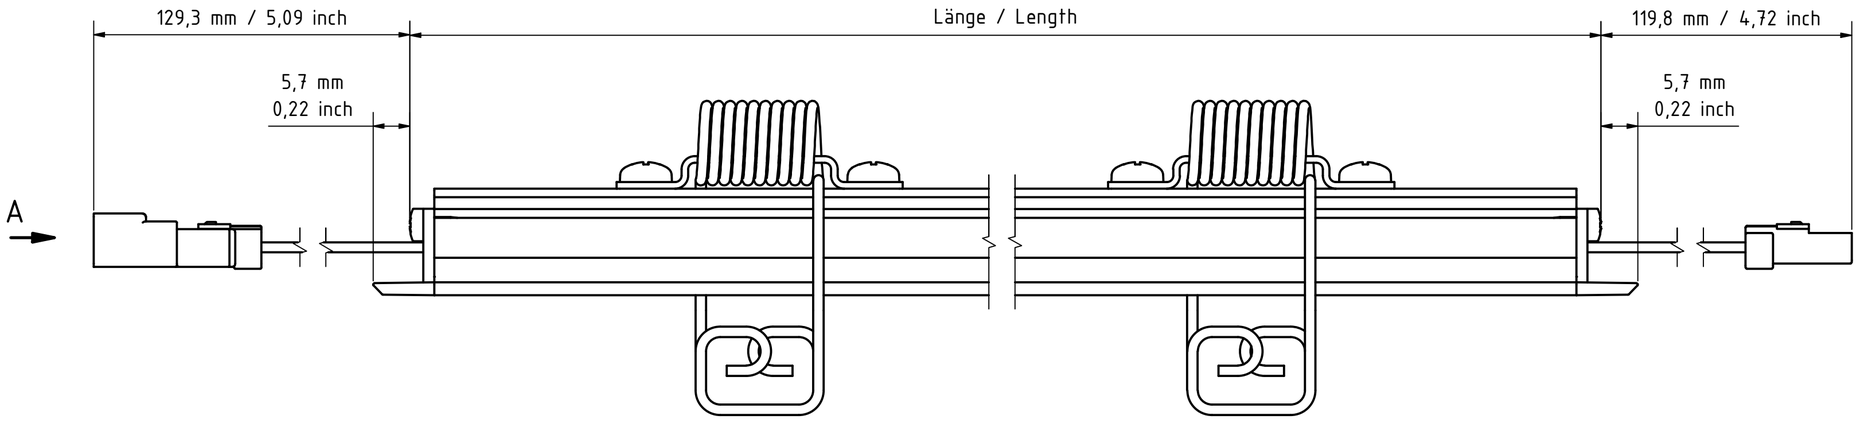


A (1,5 : 1)

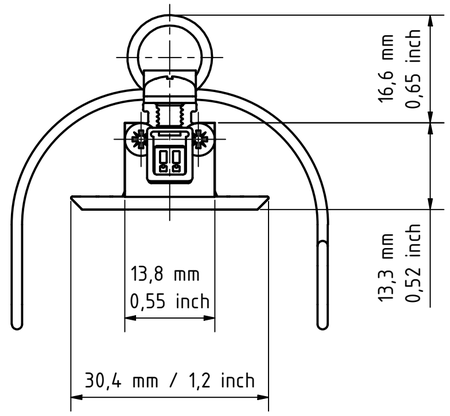


VarioCon Mini:
Stecker / Male:

Tiefe / Depth
8,2 mm / 8,4 mm
0,32 inch / 0,33 inch

SW




TW (only Nano)



1 : 1


Standard ULTIMA IP40
Einbau mit Rahmen / Recessed with Trim (R)
mit einem Steckverbinder / with one connector (MO)

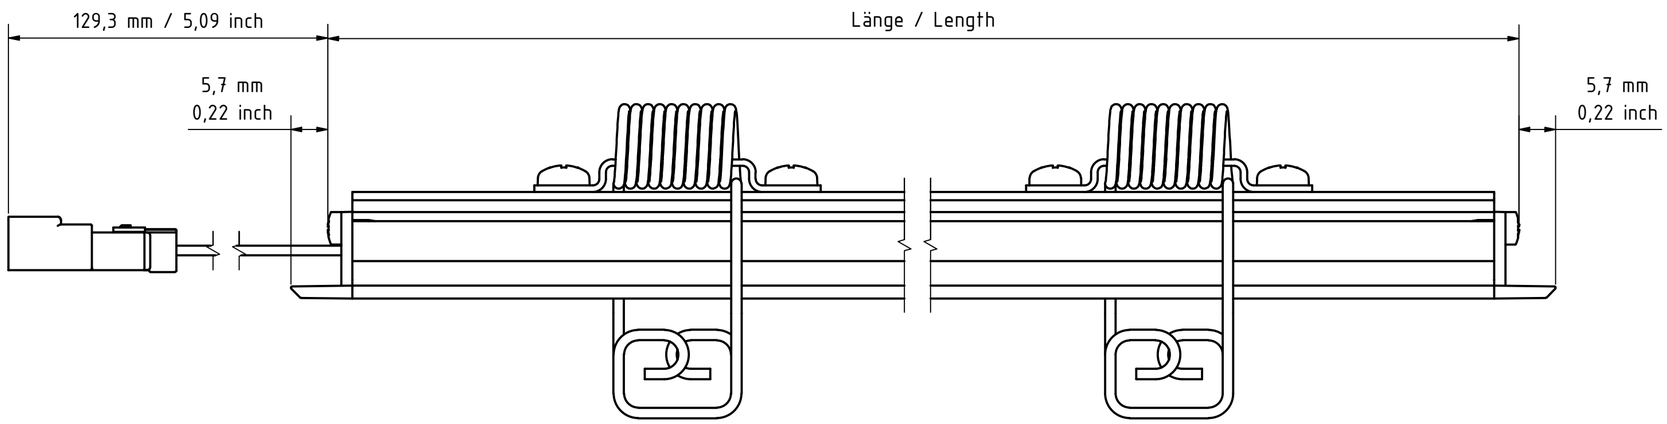


VarioCon Mini:
Buchse / Female:

Tiefe / Depth
7,2 mm / 7,8 mm
0,28 inch / 0,31 inch

SW



TW (only Nano)



1 : 1

Toleranzen der Leuchtenlängen / Tolerances luminaire lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Werkstoffe und Farb-Varianten / Material and Color options:

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black

LED LINEAR™
A Fagerhult Group Company

Material edges according to DIN ISO 13715

	Date	Name
Drawn	25.09.2026	Zeyen
Controlled	25.09.2026	Weßels
Approved		

Refer to protection notice ISO 16016

Index	Revision	Date	Name

General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K

Material:

Art.-No.:

Title:
ULTIMA IP40 Recessed


Drawing number:
VT 413.0022


Surface details acc. to DIN ISO 1302 in Ra/Rank 2

Scale 1 : 1


Sheet 1/2
A2

Standard ULTIMA IP40
Einbau mit Rahmen / Recessed with Trim (R)
mit einem Kabel mit offenem Ende / with one cable with open end (00)

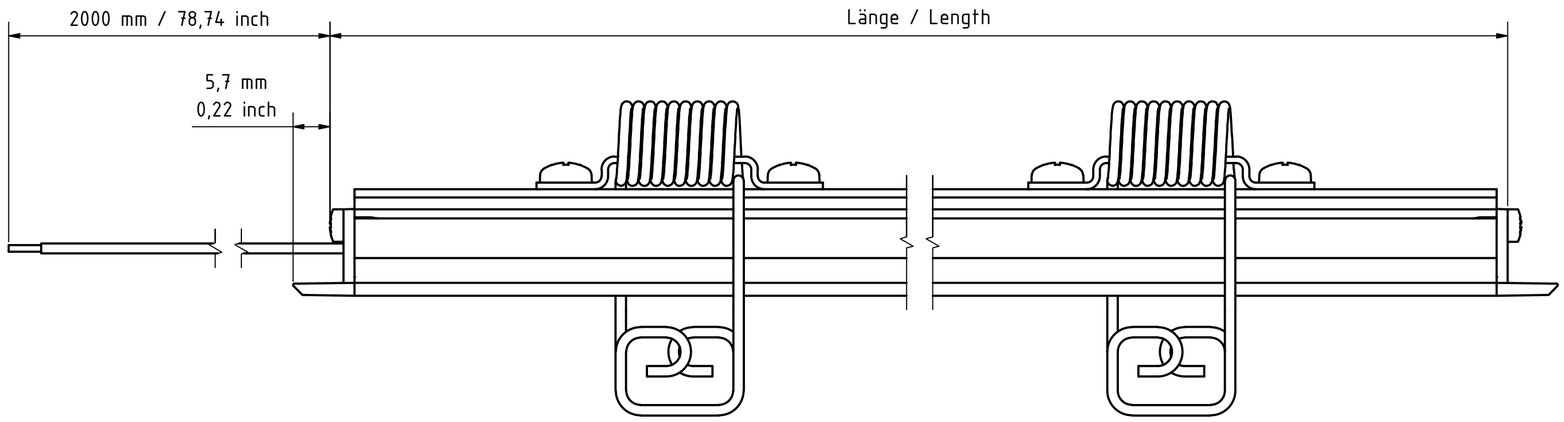

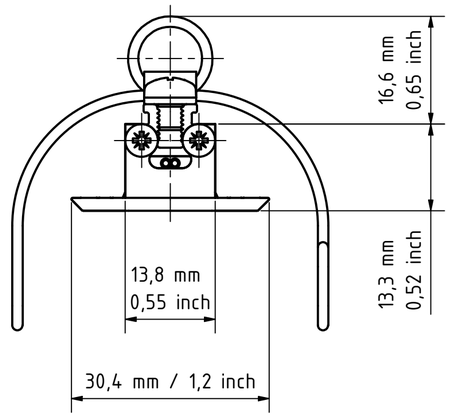

VarioCable Mini:

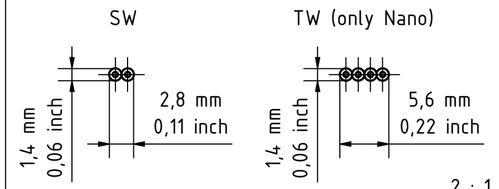

Toleranzen der Leuchtenlängen / Tolerances luminaire lenghts:

Toleranz / Tolerance: ± 1 mm / 0.04 inch

Werkstoffe und Farb-Varianten / Material and Color options:

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black

LED LINEAR™
A Fagerhult Group Company

Material edges according to DIN ISO 13715

	Date	Name
Drawn	25.09.2026	Zeyen
Controlled	25.09.2026	Weßels
Approved		

Refer to protection notice ISO 16016

Index	Revision	Date	Name

General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K

Material:

Art.-No.:

Title:
ULTIMA IP40 Recessed

Drawing number:
VT 413.0022

Surface details acc. to DIN ISO 1302 in Ra/Rank 2

Scale
2 : 1

Sheet 2/2
A2