



Standard VarioLED IP67
mit zwei Steckverbindern / with two connectors (DC)

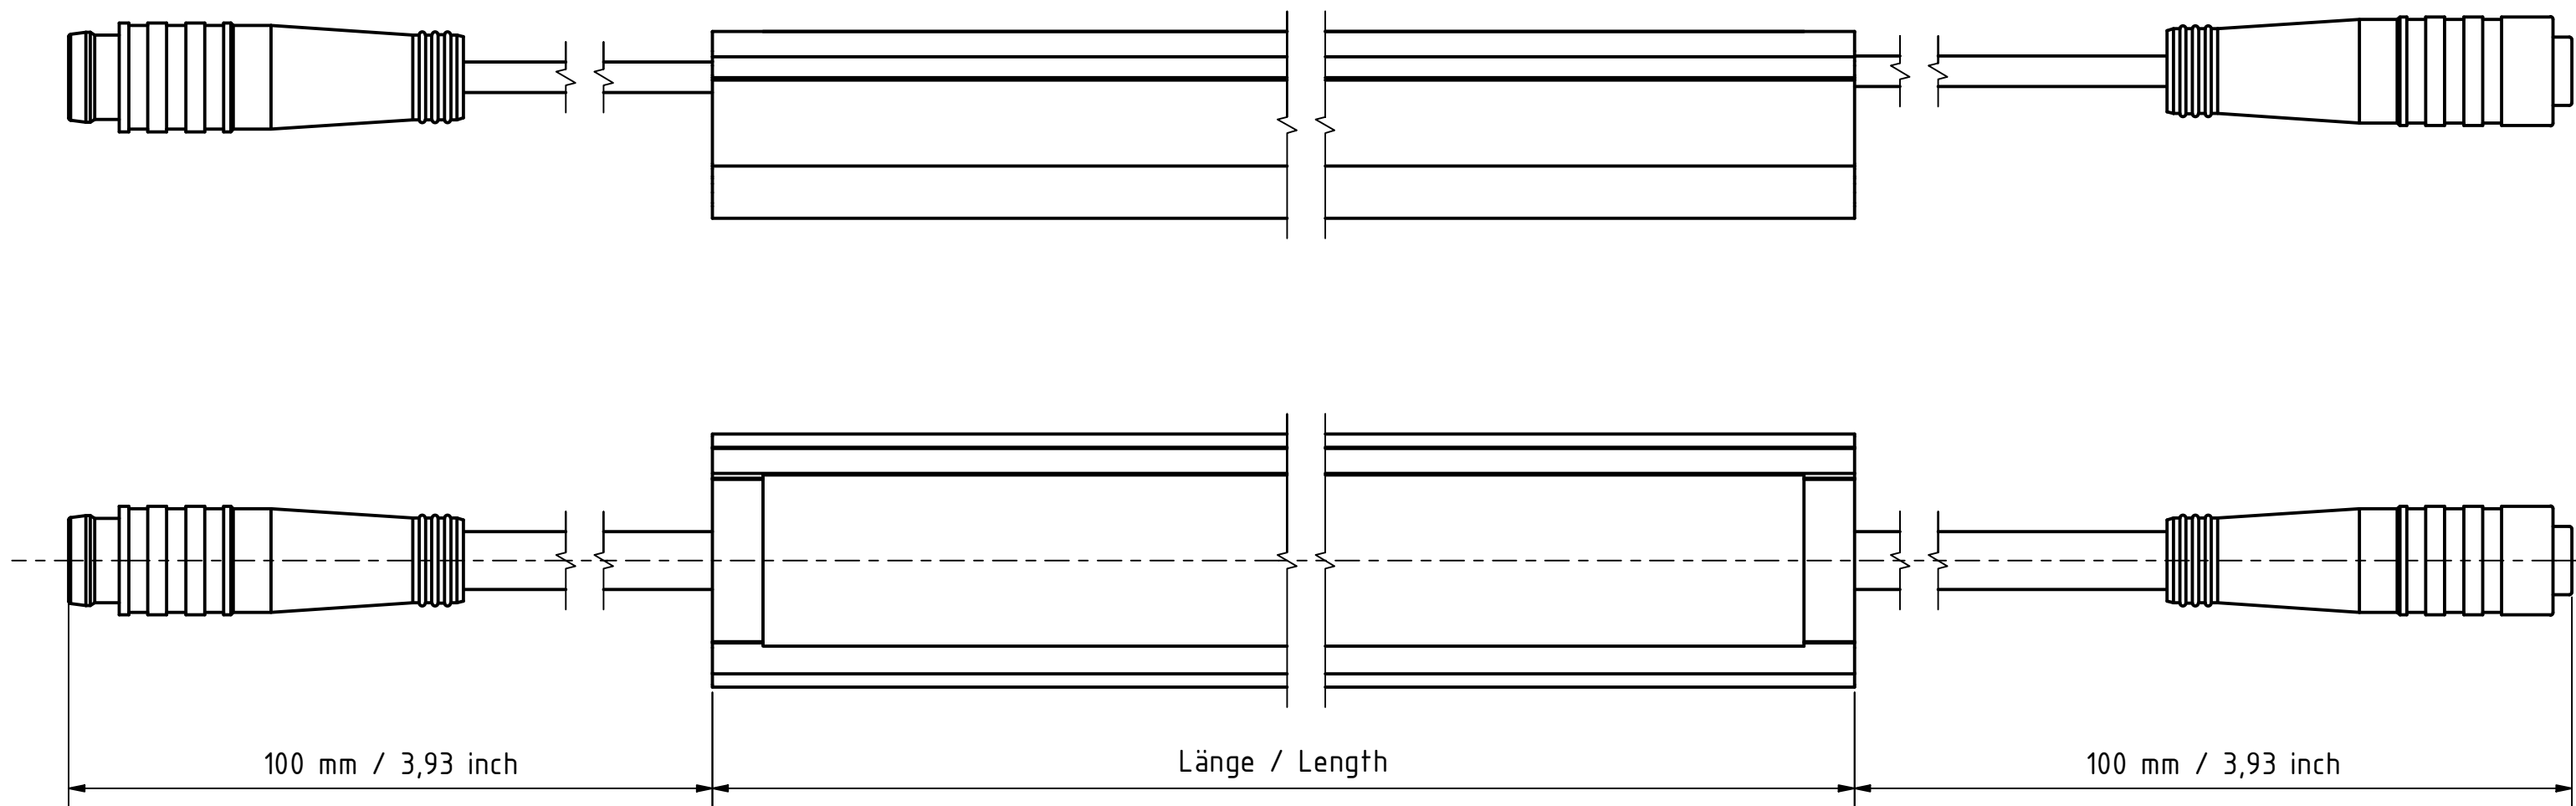

Standard VarioLED IP67
mit einem Steckverbinder / with one connector (M0)

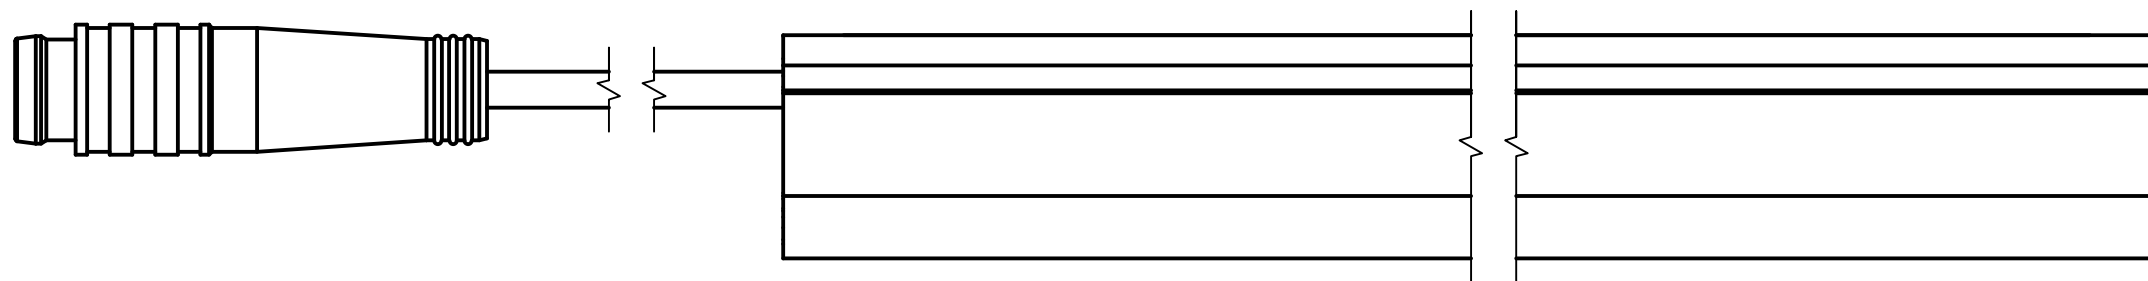

VarioCon:
Stecker / Male:

Mono / RGB / IQW

1 : 1

VarioCon:
Buchse / Female:

Mono / RGB / IQW


1 : 1

Toleranzen der Leuchtenlängen / Tolerances luminaire lenghts:


Toleranz / Tolerance: ± 1 mm / 0.04 inch

Werkstoffe und Farb-Varianten
/ Material and Color options:



- E6/C0 / 15-20µm / Aluminium Silber / silver

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:					
								Art.-No.:							
				Date		Name		Title:							
				Drawn 07.08.2026		Zeyen		VarioLED IP67							
				Controlled 07.08.2026		Weßels									
				Approved											
				Refer to protection notice ISO 16016											
								Drawing number: VT 121.0002		Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 2:1		Sheet 1/3 A2	
Index				Revision		Date		Name		Origin:		Replacement for:		Replaced by:	

mit zwei Kabeln mit offenem Ende / with two cables with open end (OT)

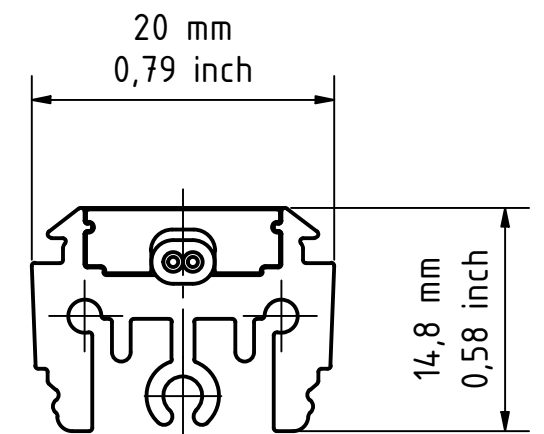

mit einem Kabel mit offenem Ende / with one cable with open end (00)

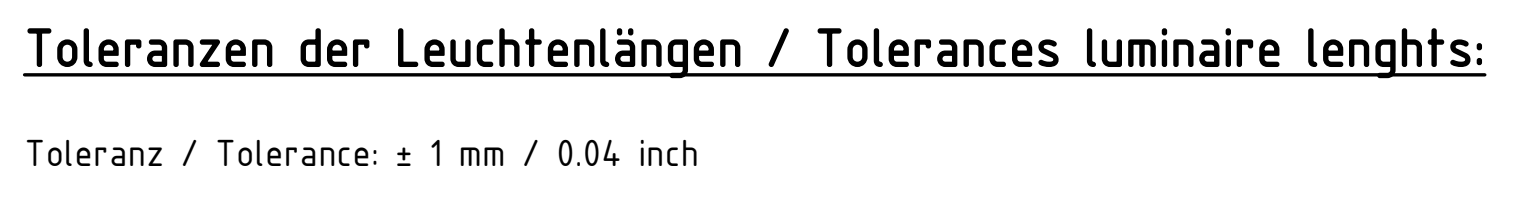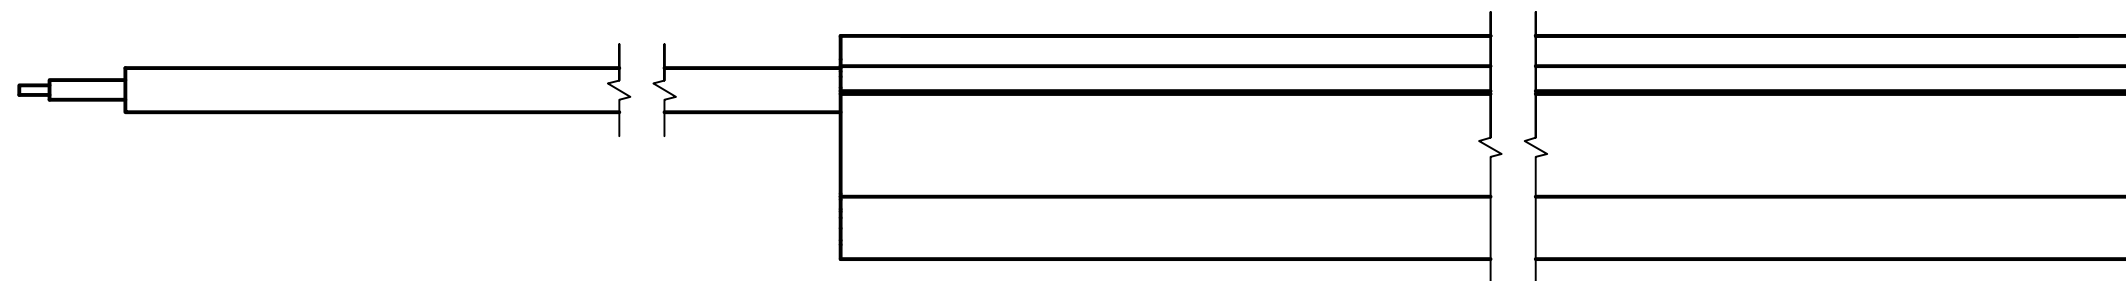


- E6/C0 / 15-20µm / Aluminium Silber / silver


LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-M DIN ISO 2768-2-K		Material:			
					Date	Name		Art.-No.:					
				Drawn	07.08.2026	Zeyen		Title: VarioLED IP67					
				Controlled	07.08.2026	Weßels							
				Approved									
				Refer to protection notice ISO 16016									
								Drawing number: VT 121.0002		Surface details acc. to DIN ISO 1302 in Ra/Rank: 2		Scale 2:1	Sheet 2/3 A2
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:				

Standard VarioLED IP67
mit Montagezubehör / with mounting accessories


Zeichen in Bestell-Nr.:
Digits in order code:
/

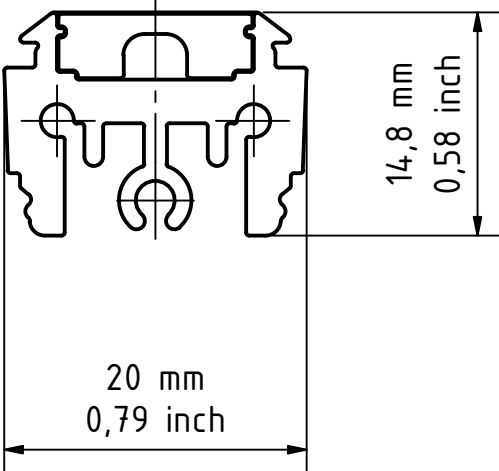


Zeichen in Bestell-Nr.:
Digits in order code:
MP / 10000039-SIL/-SCH-0-LLLL
C00 / 10000040-01 / 10000040-SCH-01

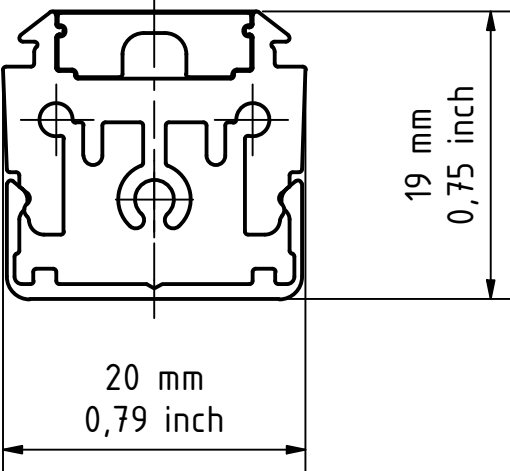


Zeichen in Bestell-Nr.:
Digits in order code:
C15 / 10000040-01-15D (SIL)
/ 10000040-SCH-01-15D

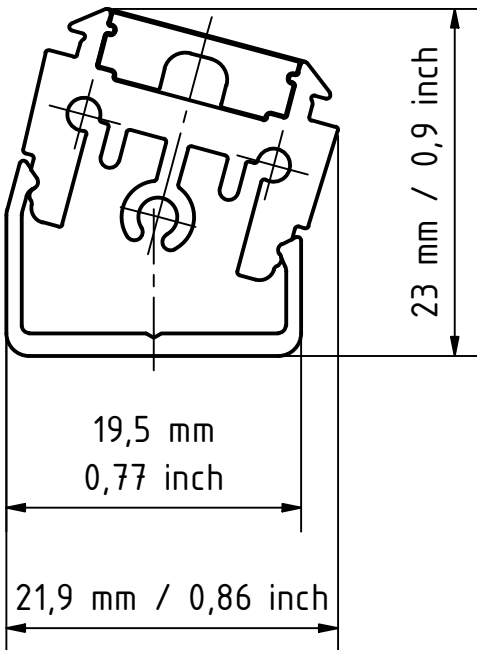



Zeichen in Bestell-Nr.:
Digits in order code:
C30 / 10000040-01-30D (SIL)
/ 10000040-SCH-01-30D

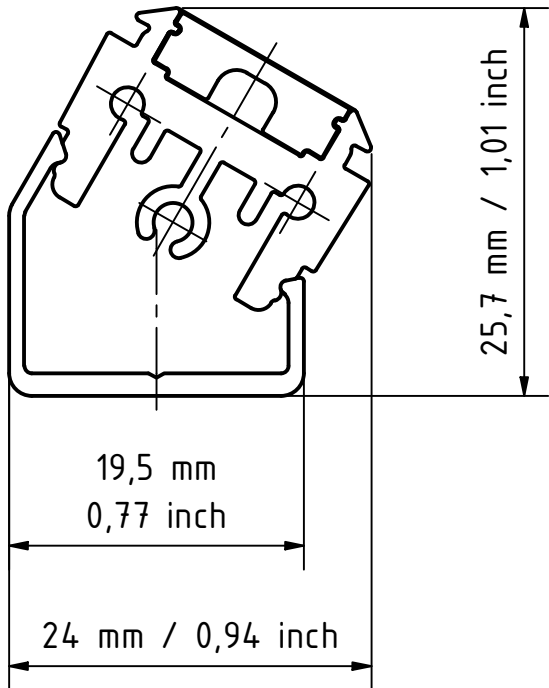


Zeichen in Bestell-Nr.:
Digits in order code:
C45 / 10000040-01-45D (SIL)
/ 10000040-SCH-01-45D

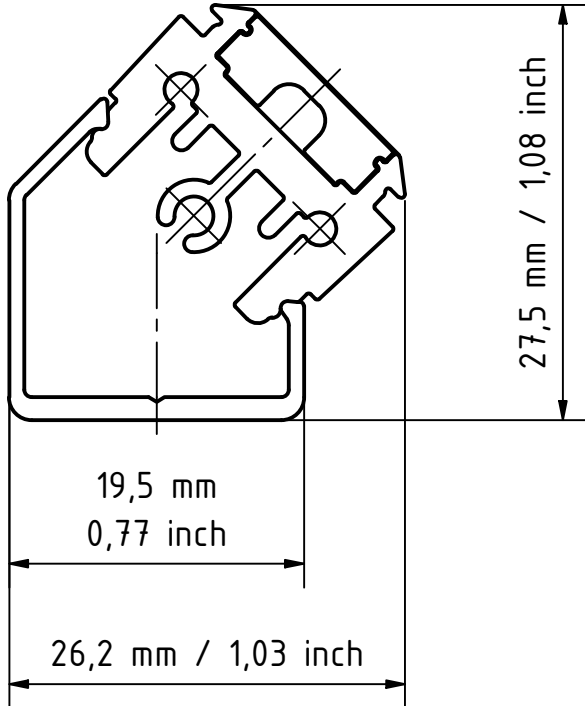

Zeichen in Bestell-Nr.:
Digits in order code:
PCL / 13000032

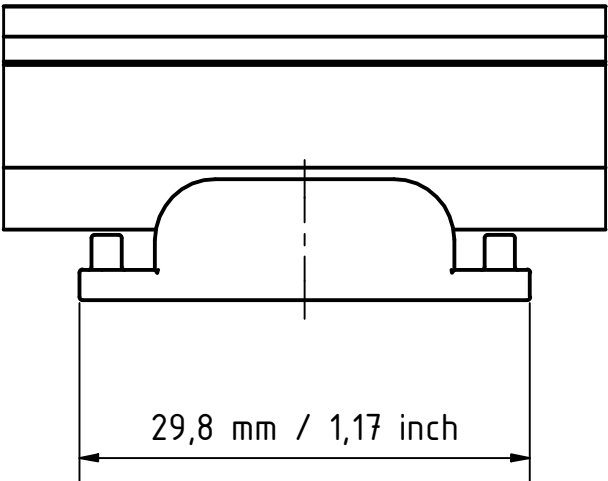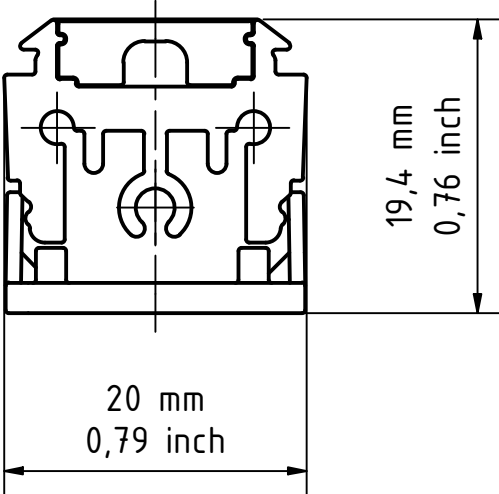

Hinweis zu / Note on
C00, C15, C30 und C45
Länge / Length: 90 mm / 3,54 inch

LED LINEAR TM lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-M		Material:	
				Date		Name		Art.-No.:			
				Drawn 07.08.2026		Zeyen		Title:			
				Controlled 07.08.2026		Weßels		VarioLED IP67			
				Approved				Drawing number: VT 121.0002			
						Refer to protection notice ISO 16016		Surface details acc. to DIN ISO 1302 in Ra/Rank 2			
								Scale 2:1		Sheet 3/3 A2	
								Replacement for:			
								Replaced by:			
Index	Revision	Date	Name	Origin:							