

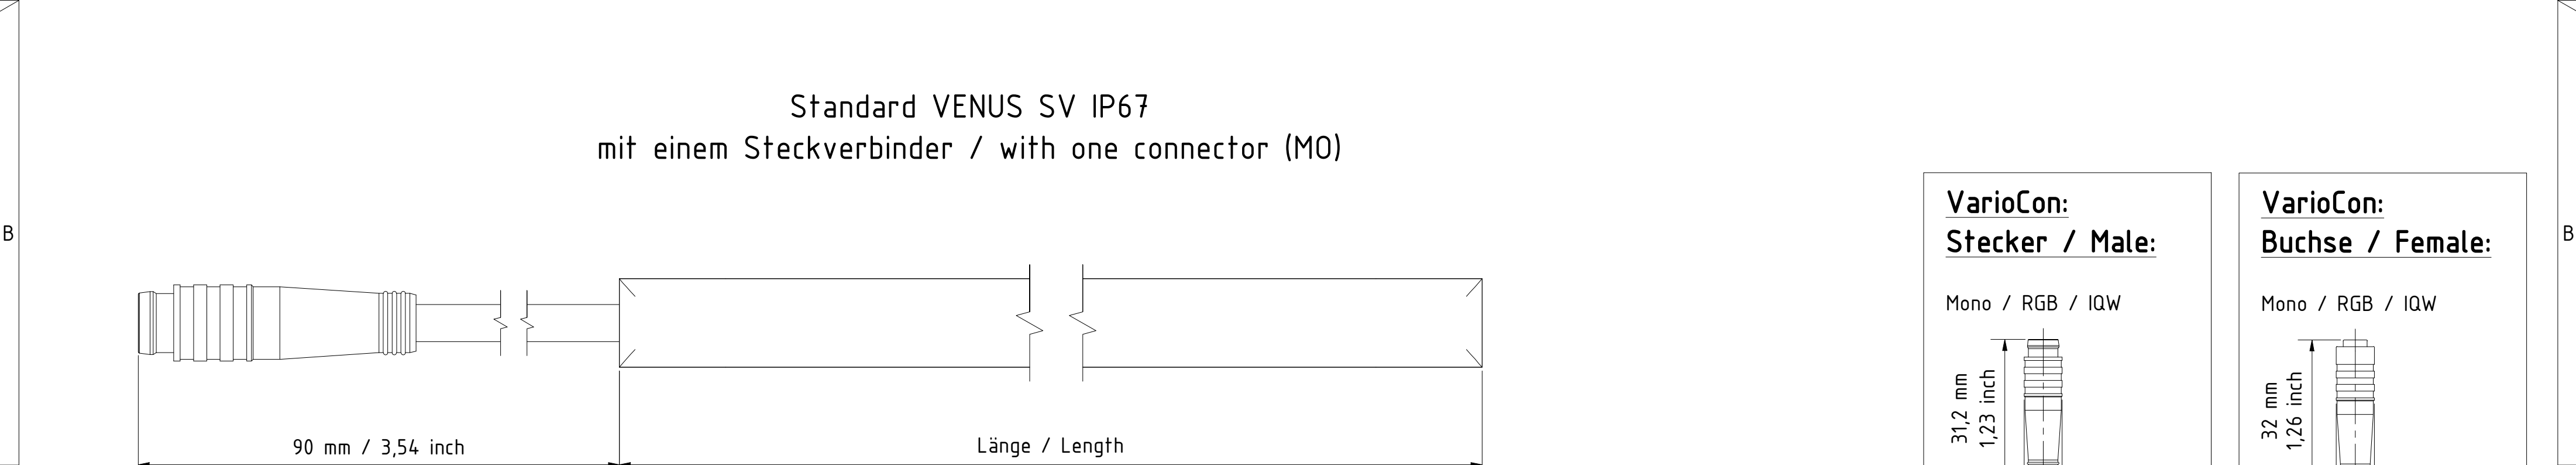


Standard VENUS SV IP67
mit zwei Steckverbindern / with two connectors (DC)


20 mm
0,79 inch

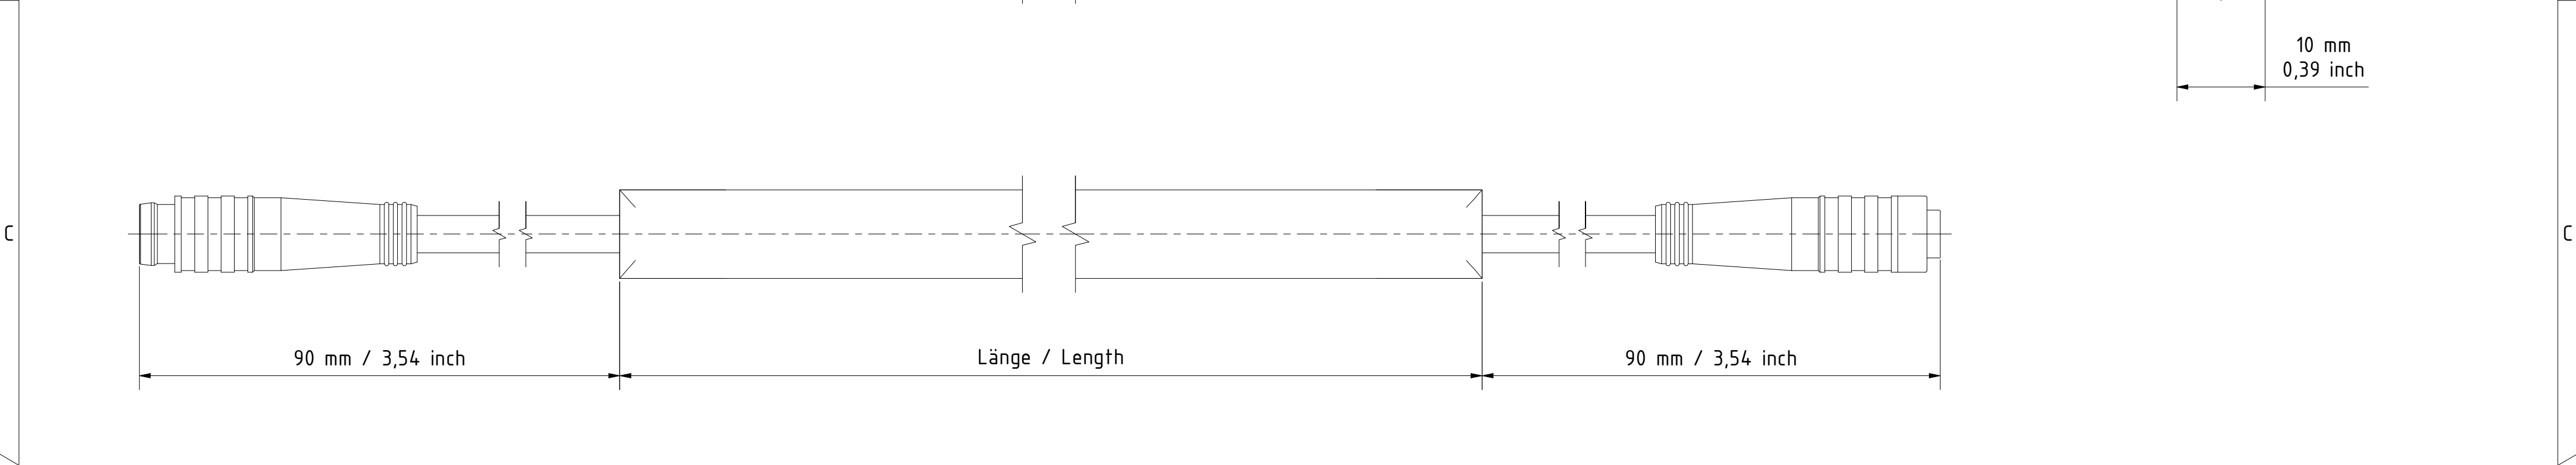



Technical drawing of a shaft with a keyway. The shaft has a diameter of $\varnothing 8,6$ mm and a keyway width of $\varnothing 0,34$ inch. The drawing shows a cross-section of the shaft with a keyway cut into it. The keyway is defined by two vertical lines, and the dimensions are indicated with arrows and text.

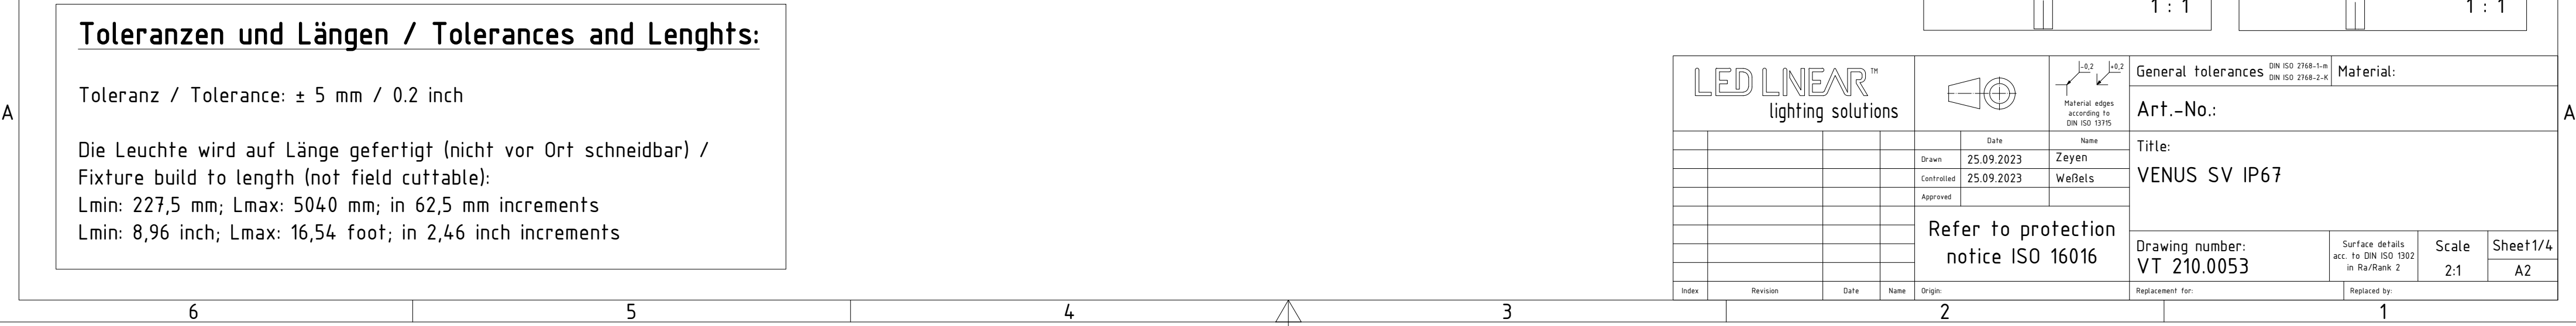



Toleranz / Tolerance: ± 5 mm / 0.2 inch

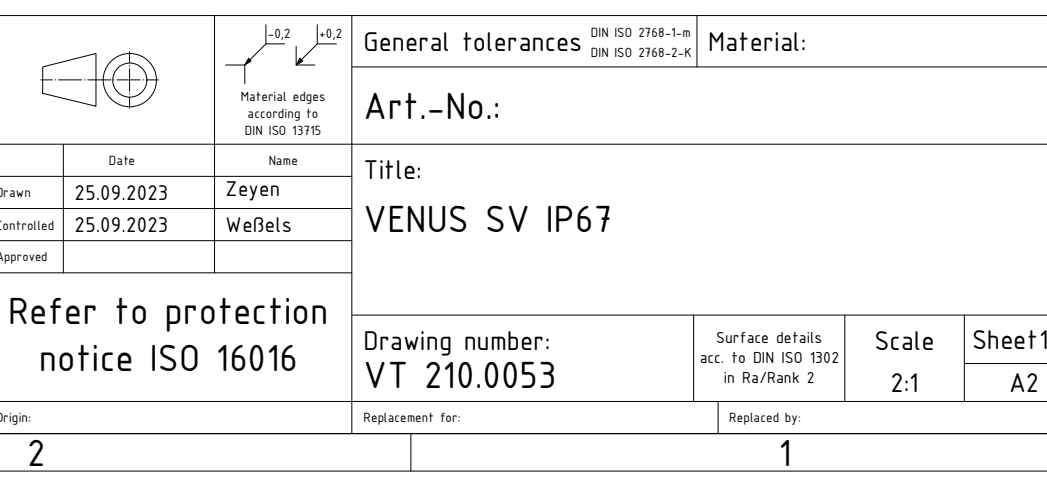


LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13115		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Date		Name		Art.-No.:			
				Drawn 25.09.2023		Zeyen		Title:			
				Controlled 25.09.2023		Weßels		VENUS SV IP67			
				Approved							
				</							

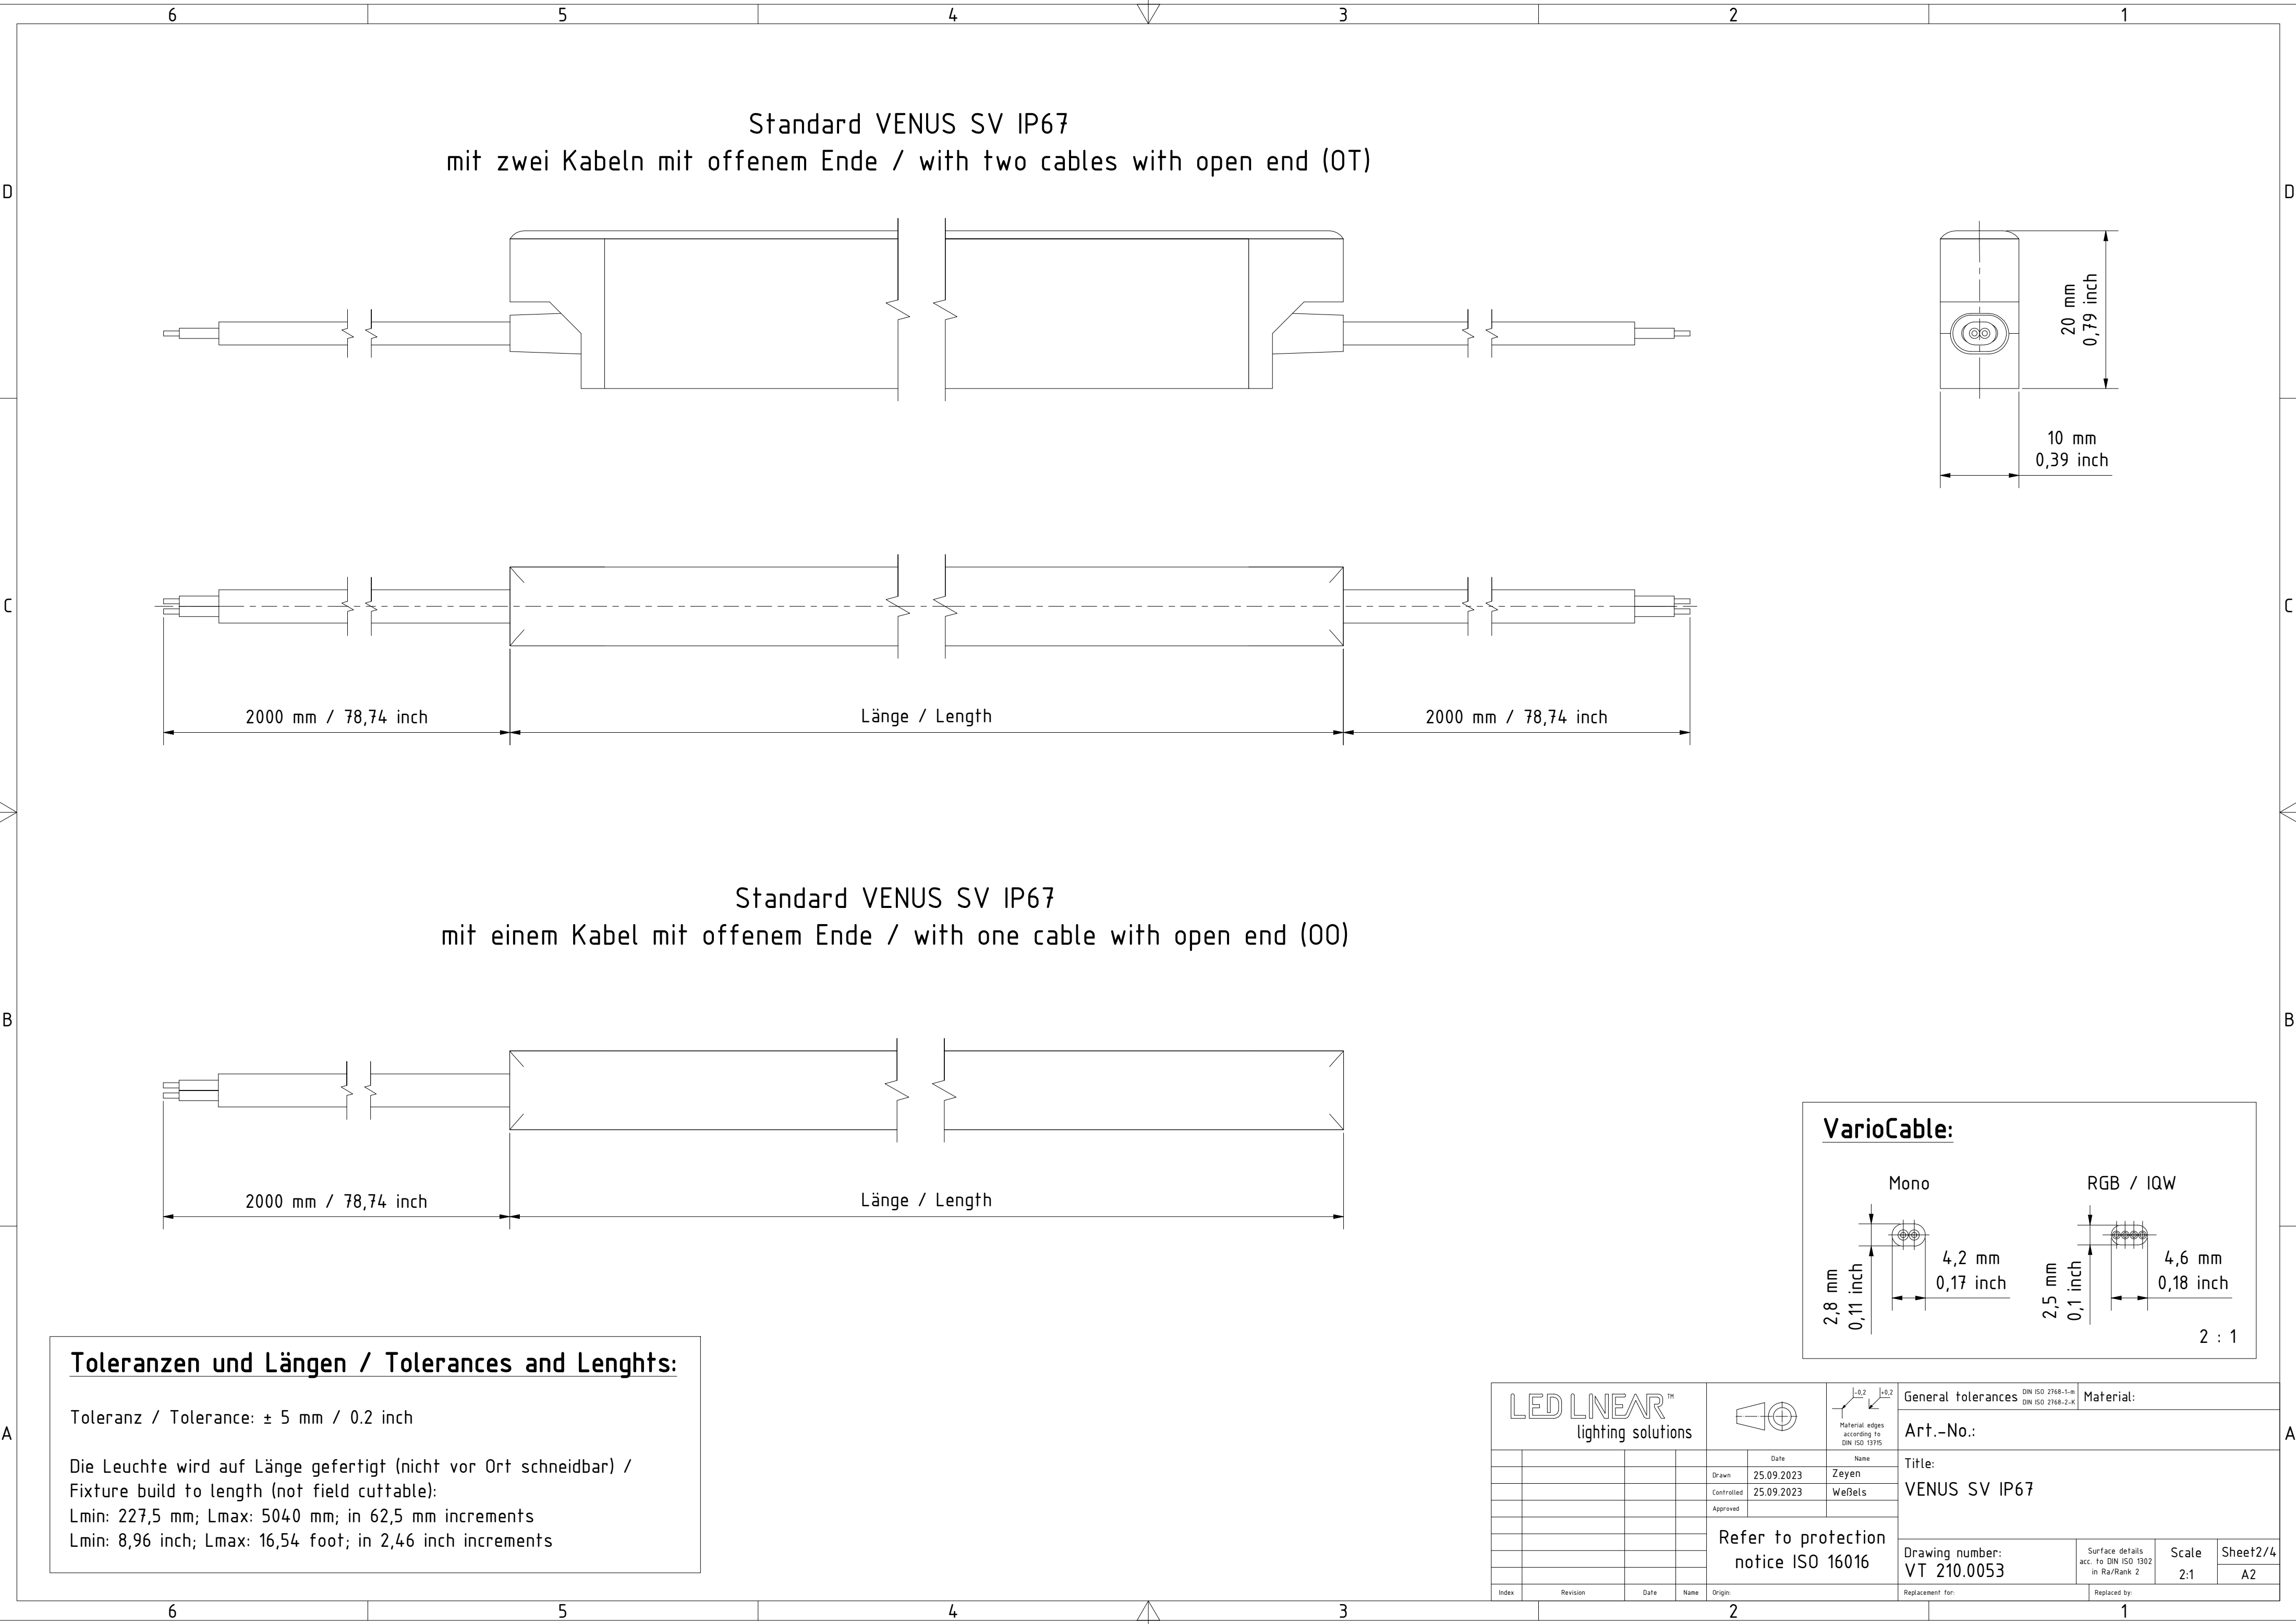


Standard VENUS SV IP67
mit zwei Kabeln mit offenem Ende / with two cables with open end (OT)

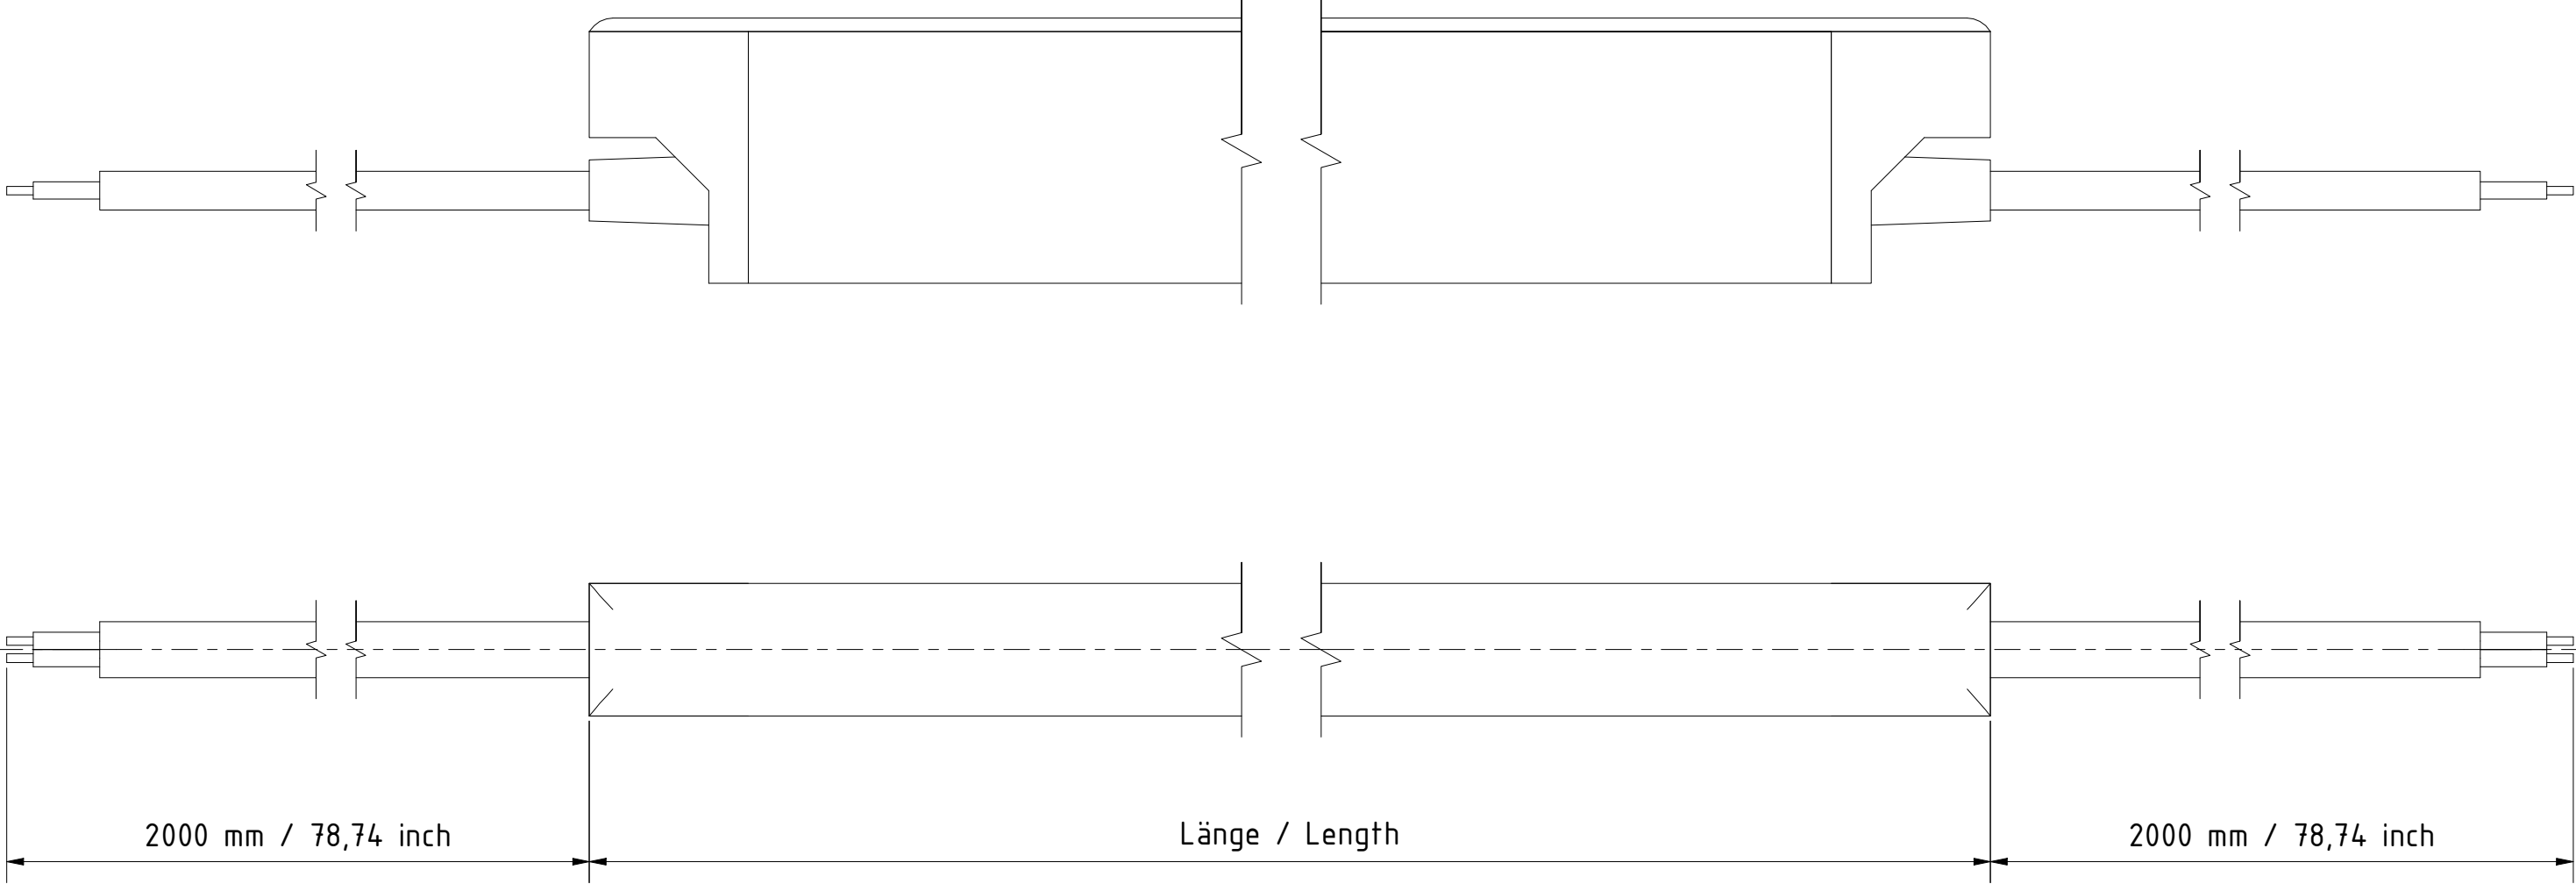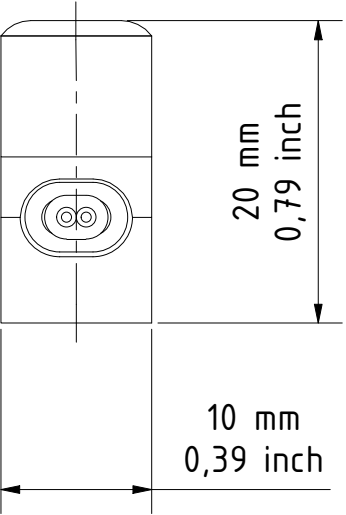

Standard VENUS SV IP67
mit einem Kabel mit offenem Ende / with one cable with open end (OO)

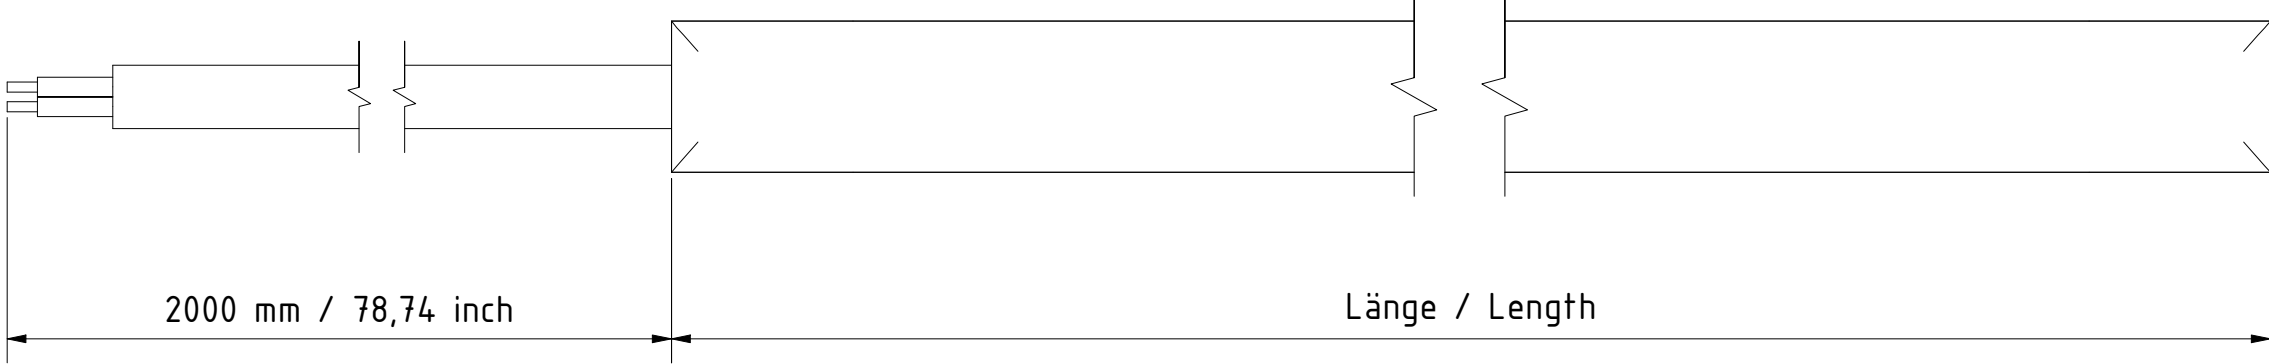

VarioCable:

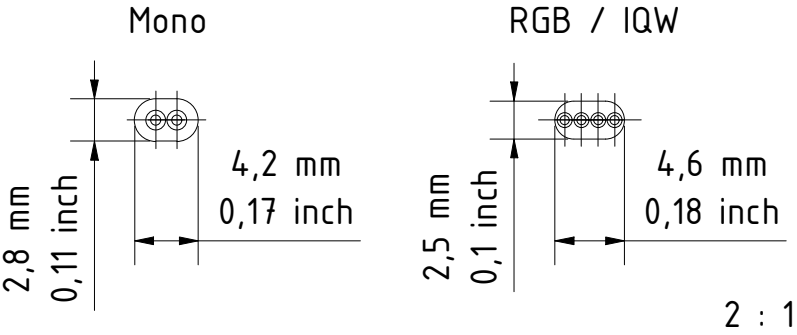


Toleranzen und Längen / Tolerances and Lengths:


Toleranz / Tolerance: $\pm 5 \text{ mm}$ / 0.2 inch

Die Leuchte wird auf Länge gefertigt (nicht vor Ort schneidbar) /
Fixture build to length (not field cuttable):


Lmin: 227,5 mm; Lmax: 5040 mm; in 62,5 mm increments


Lmin: 8,96 inch; Lmax: 16,54 foot; in 2,46 inch increments

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	25.09.2023	Zeyen	Art.-No.:					
				Controlled	25.09.2023	Weßels	Title:					
				Approved			VENUS SV IP67					
				Refer to protection notice ISO 16016			Drawing number: VT 210.0053		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 2:1	Sheet2/4 A2	
Index	Revision	Date	Name	Origin:	Replacement for:				Replaced by:			

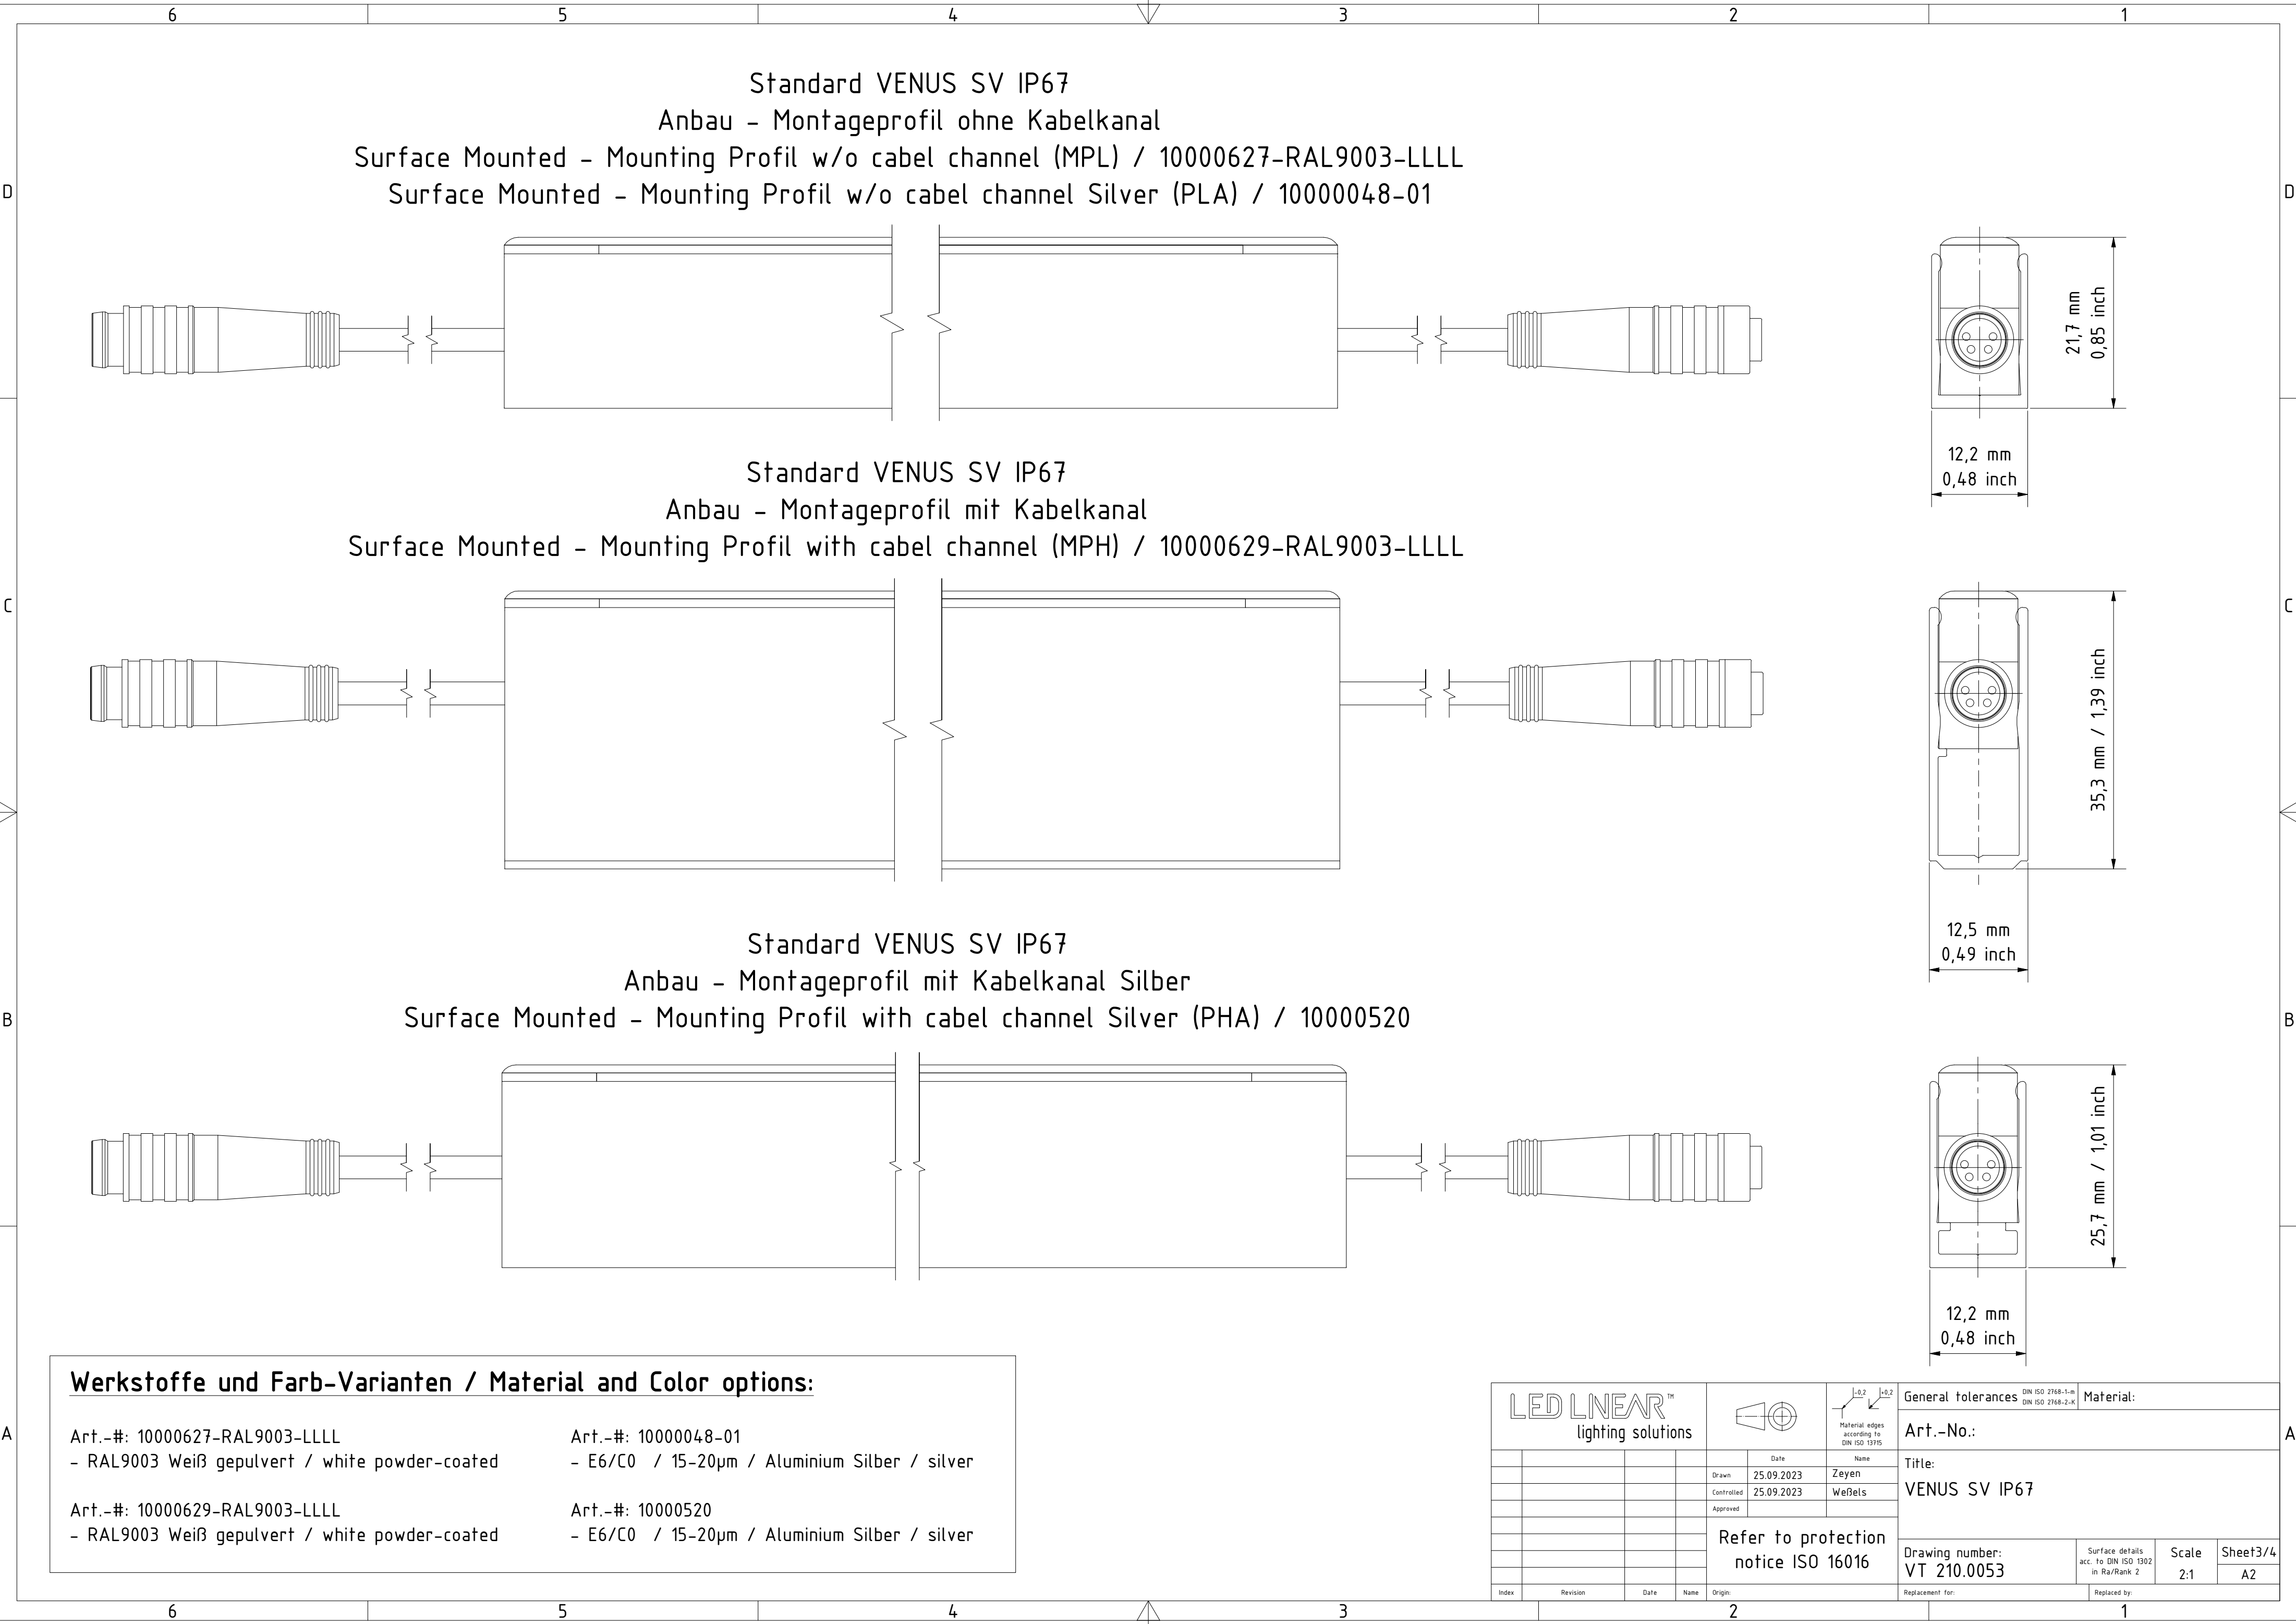


Werkstoffe und Farb-Varianten / Material and Color options:			
Art.-#: 10000627-RAL9003-LLLL		Art.-#: 10000048-01	
- RAL9003 Weiß gepulvert / white powder-coated		- E6/C0 / 15-20µm / Aluminium Silber / silver	
Art.-#: 10000629-RAL9003-LLLL		Art.-#: 10000520	
- RAL9003 Weiß gepulvert / white powder-coated		- E6/C0 / 15-20µm / Aluminium Silber / silver	

LED LINEAR™ lighting solutions						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
								Art.-No.:				
					Date	Name	Title:					
					Drawn	25.09.2023	Zeyen	VENUS SV IP67				
					Controlled	25.09.2023	Weßels					
					Approved							
					Refer to protection notice ISO 16016							
								Drawing number: VT 210.0053		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 2:1	Sheet3/4 A2
Index	Revision	Date	Name	Origin:				Replacement for:		Replaced by:		

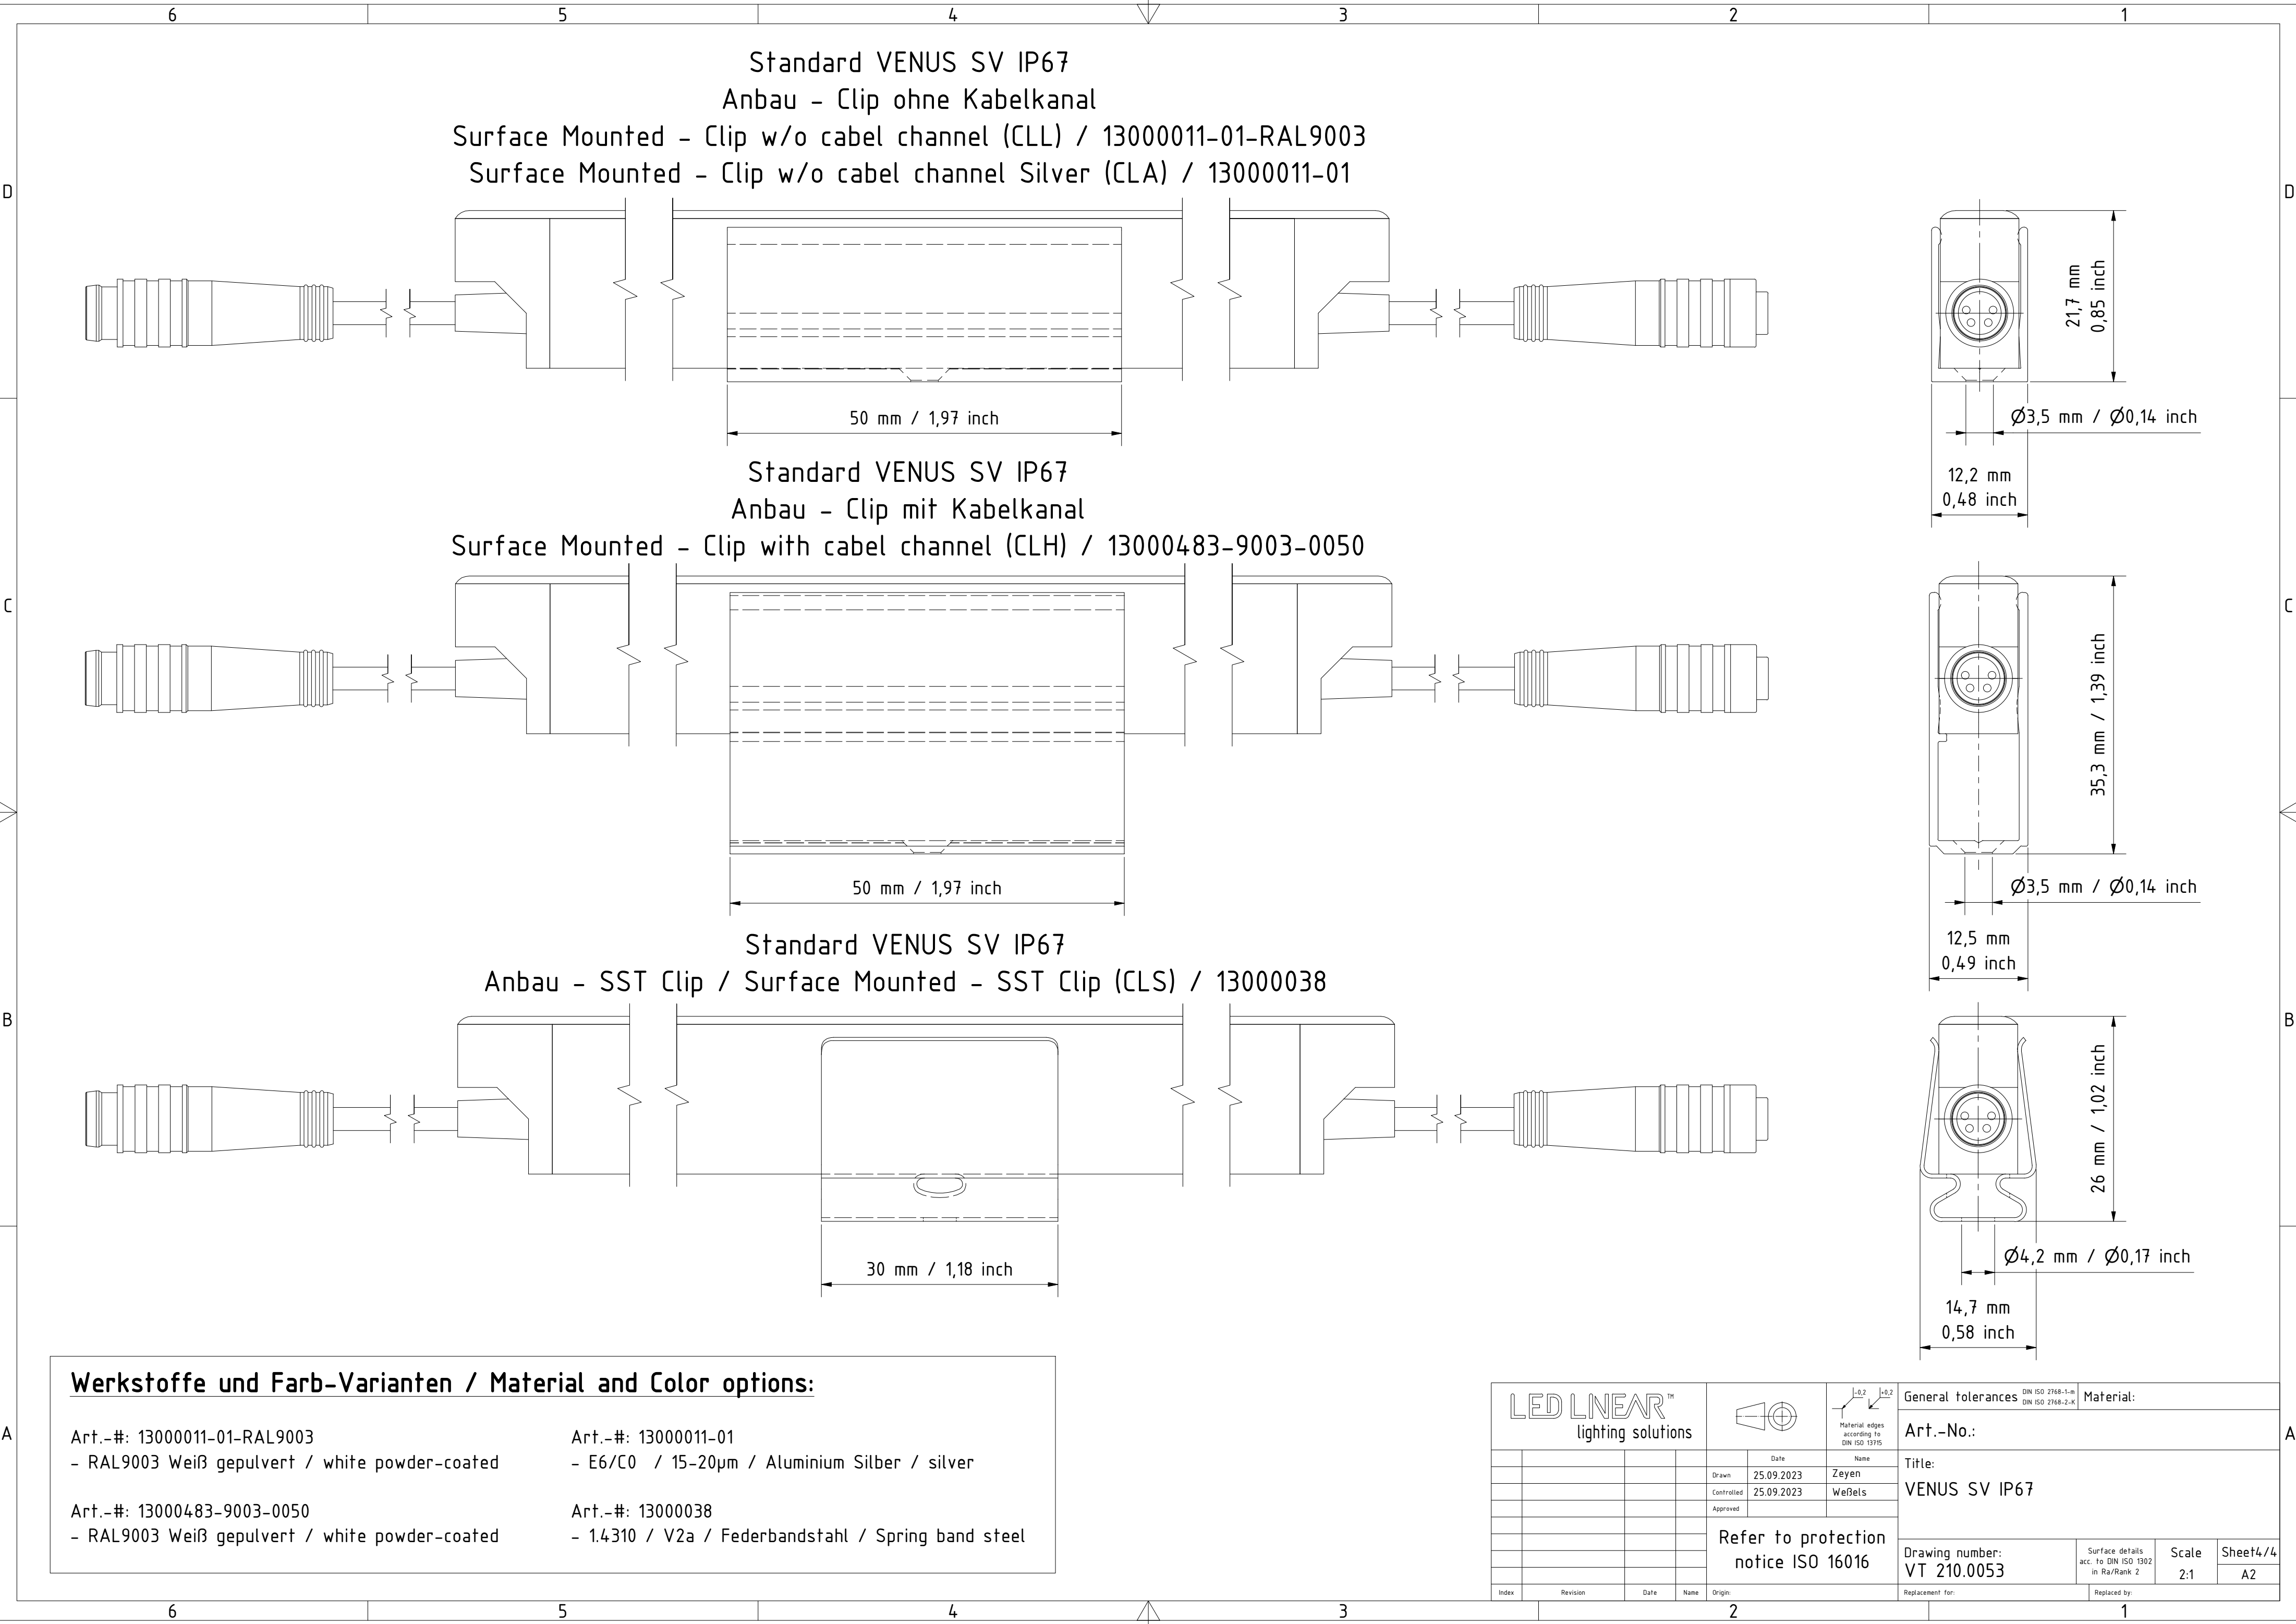

Werkstoffe und Farb-Varianten / Material and Color options:			
Art.-#: 13000011-01-RAL9003		Art.-#: 13000011-01	
- RAL9003 Weiß gepulvert / white powder-coated		- E6/C0 / 15-20µm / Aluminium Silber / silver	
Art.-#: 13000483-9003-0050		Art.-#: 13000038	
- RAL9003 Weiß gepulvert / white powder-coated		- 1.4310 / V2a / Federbandstahl / Spring band steel	

LED LINEAR™ lighting solutions								General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:							
						Material edges according to DIN ISO 13715		Art.-No.:									
				Date		Name		Title:									
				Drawn 25.09.2023		Zeyen		VENUS SV IP67									
				Controlled 25.09.2023		Weßels											
				Approved													
				Refer to protection notice ISO 16016													
								Drawing number: VT 210.0053		Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 2:1		Sheet4/4 A2			
Index				Revision		Date		Name		Origin:		Replacement for:		Replaced by:			