


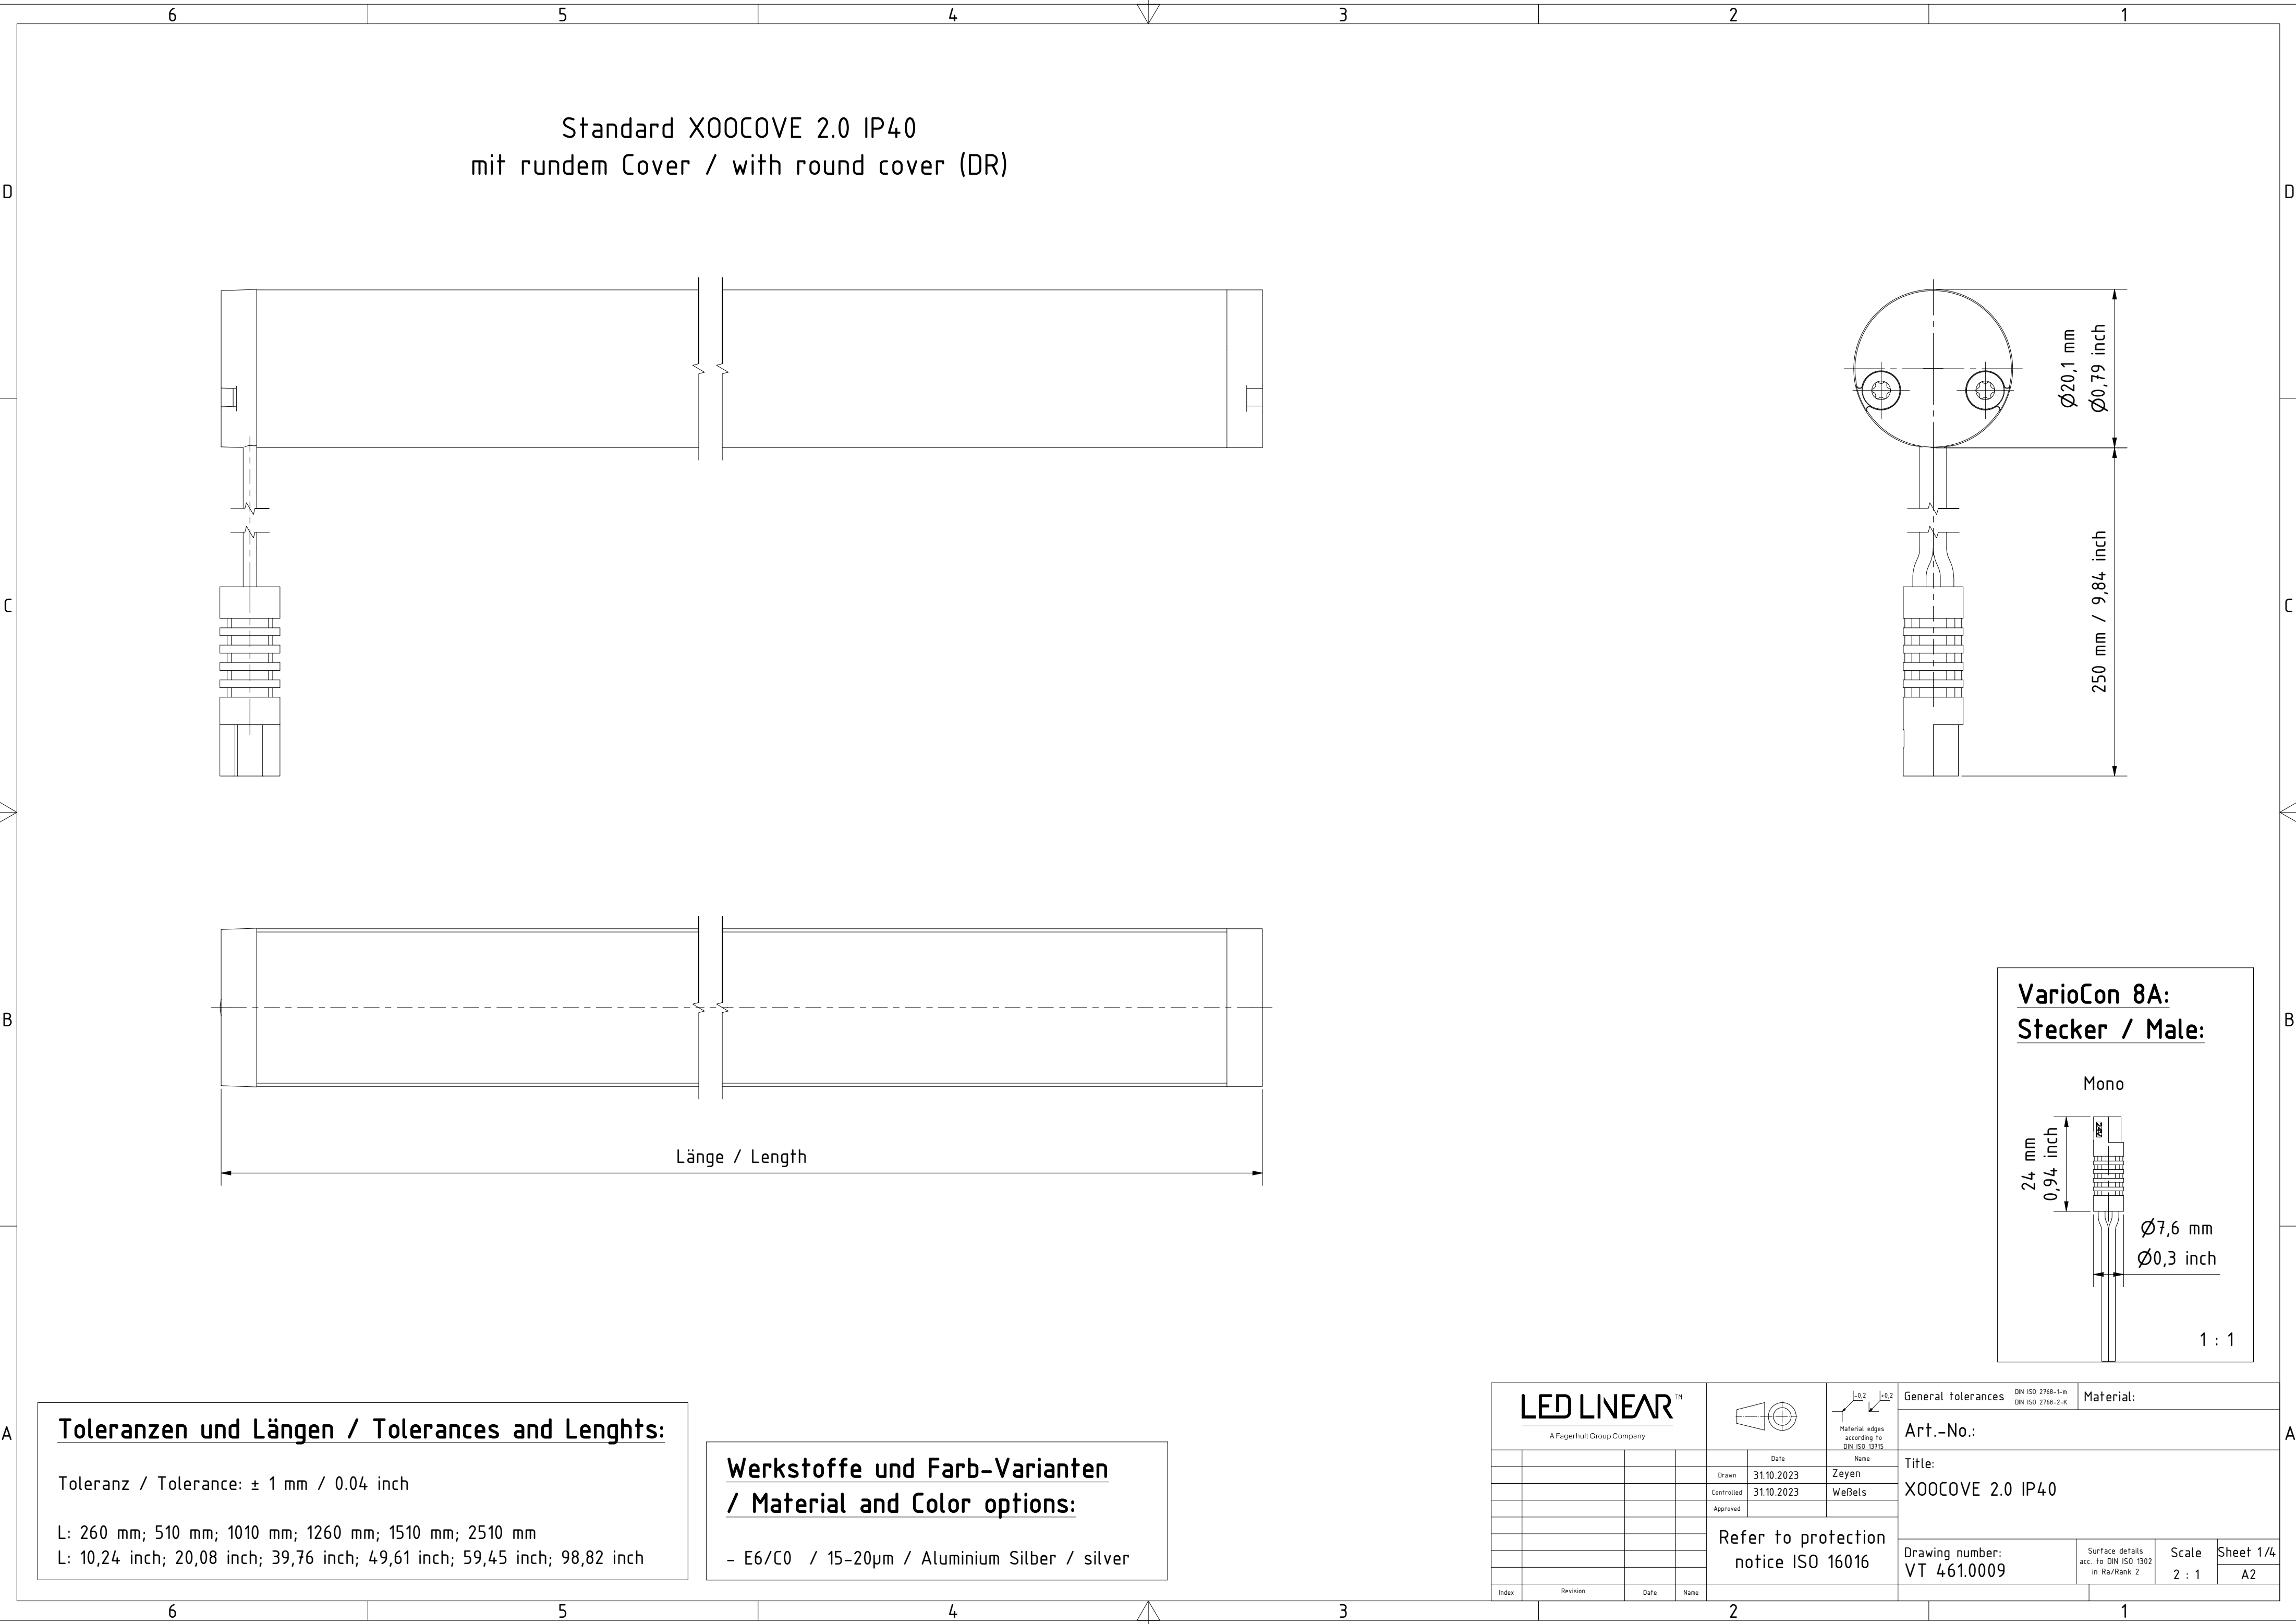

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch


L: 260 mm; 510 mm; 1010 mm; 1260 mm; 1510 mm; 2510 mm

L: 10,24 inch; 20,08 inch; 39,76 inch; 49,61 inch; 59,45 inch; 98,82 inch

**Werkstoffe und Farb-Varianten
/ Material and Color options:**




- E6/C0 / 15-20µm / Aluminium Silber / silver

**VarioCon 8A:
Stecker / Male:**

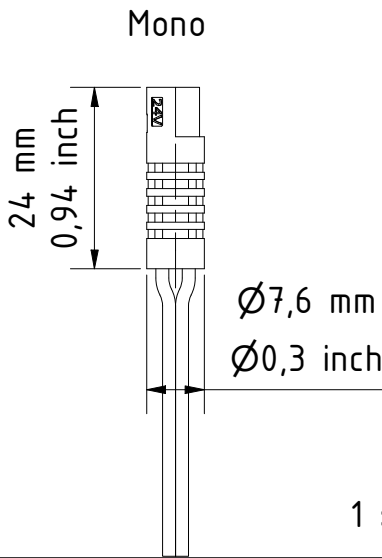


LED LINEAR TM A Fagerhult Group Company						General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:			
					Date	Name	Art.-No.:				
				Drawn	31.10.2023	Zeyen	Title:				
				Controlled	31.10.2023	Weßels	X00COVE 2.0 IP40				
				Approved							
				Refer to protection notice ISO 16016			Drawing number:		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 2 : 1	Sheet 1/4 A2
							VT 461.0009				
Index	Revision	Date	Name								

Standard X00COVE 2.0 IP40
mit Linse / with lens (60)

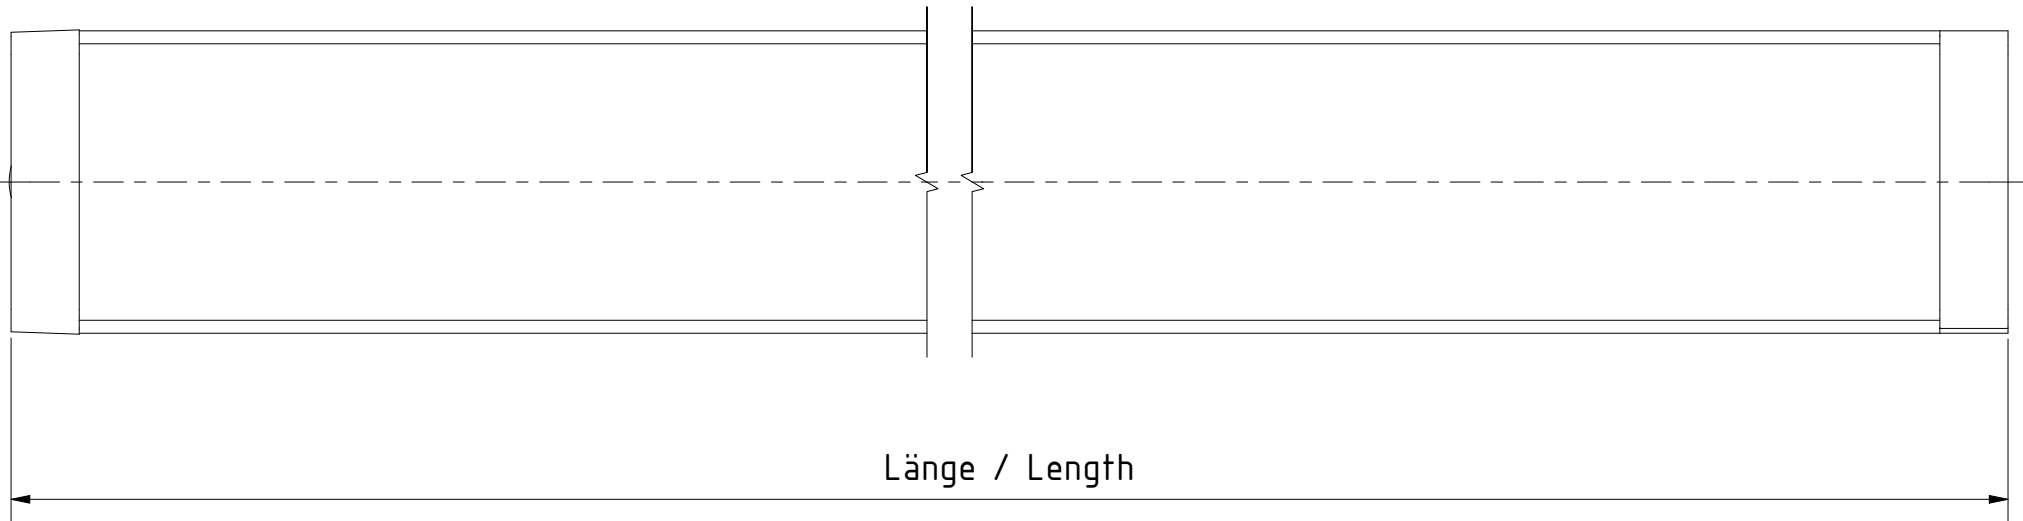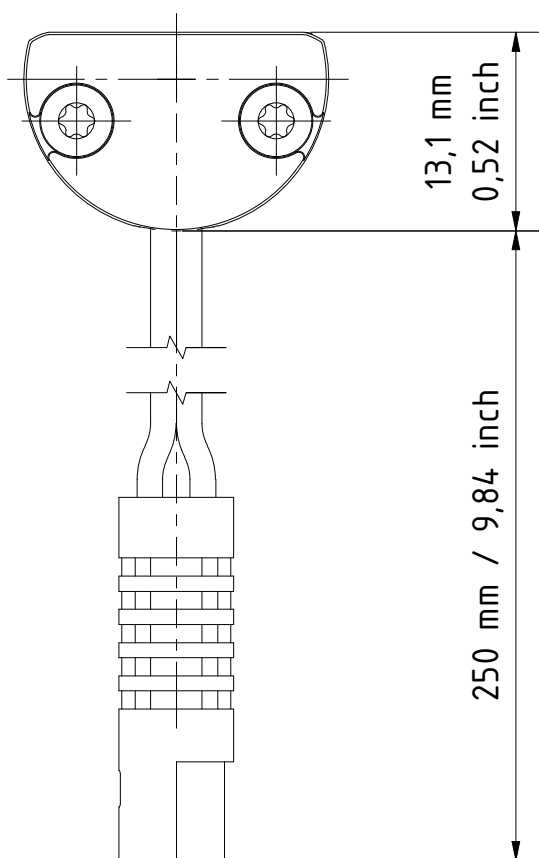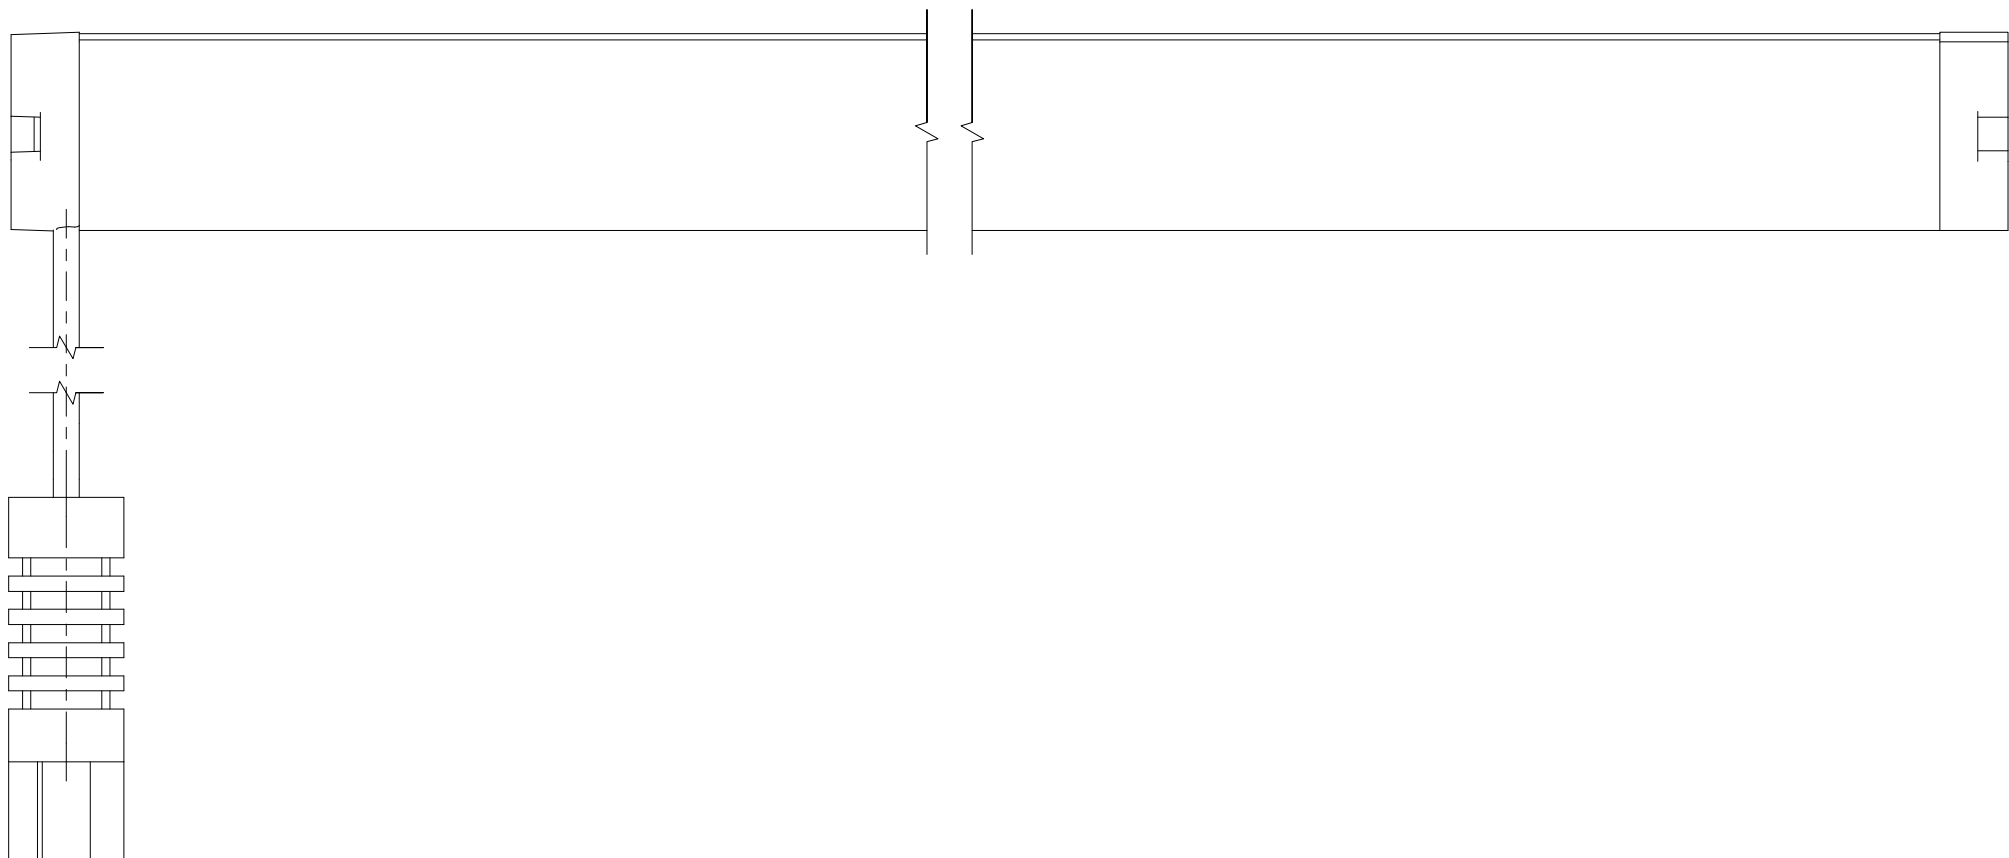

VarioCon 8A:
Stecker / Male:

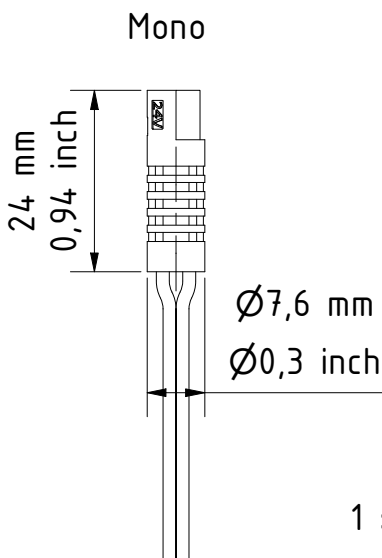

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: $\pm 1 \text{ mm}$ / 0.04 inch


L: 260 mm; 510 mm; 1010 mm; 1260 mm; 1510 mm; 2510 mm

L: 10,24 inch; 20,08 inch; 39,76 inch; 49,61 inch; 59,45 inch; 98,82 inch

Werkstoffe und Farb-Varianten
/ Material and Color options:


- E6/C0 / 15-20 μm / Aluminium Silber / silver

LED LINEAR TM A Fagerhult Group Company						General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K	Material:		
				Drawn	31.10.2023	Zeyen	Art.-No.:		
				Controlled	31.10.2023	Weßels	Title:		
				Approved			X00COVE 2.0 IP40		
				Refer to protection notice ISO 16016			Drawing number:		Surface details acc. to DIN ISO 1302 in Ra/Rank 2
							VT 461.0009		Scale 2 : 1
Index	Revision	Date	Name						Sheet 2/4 A2

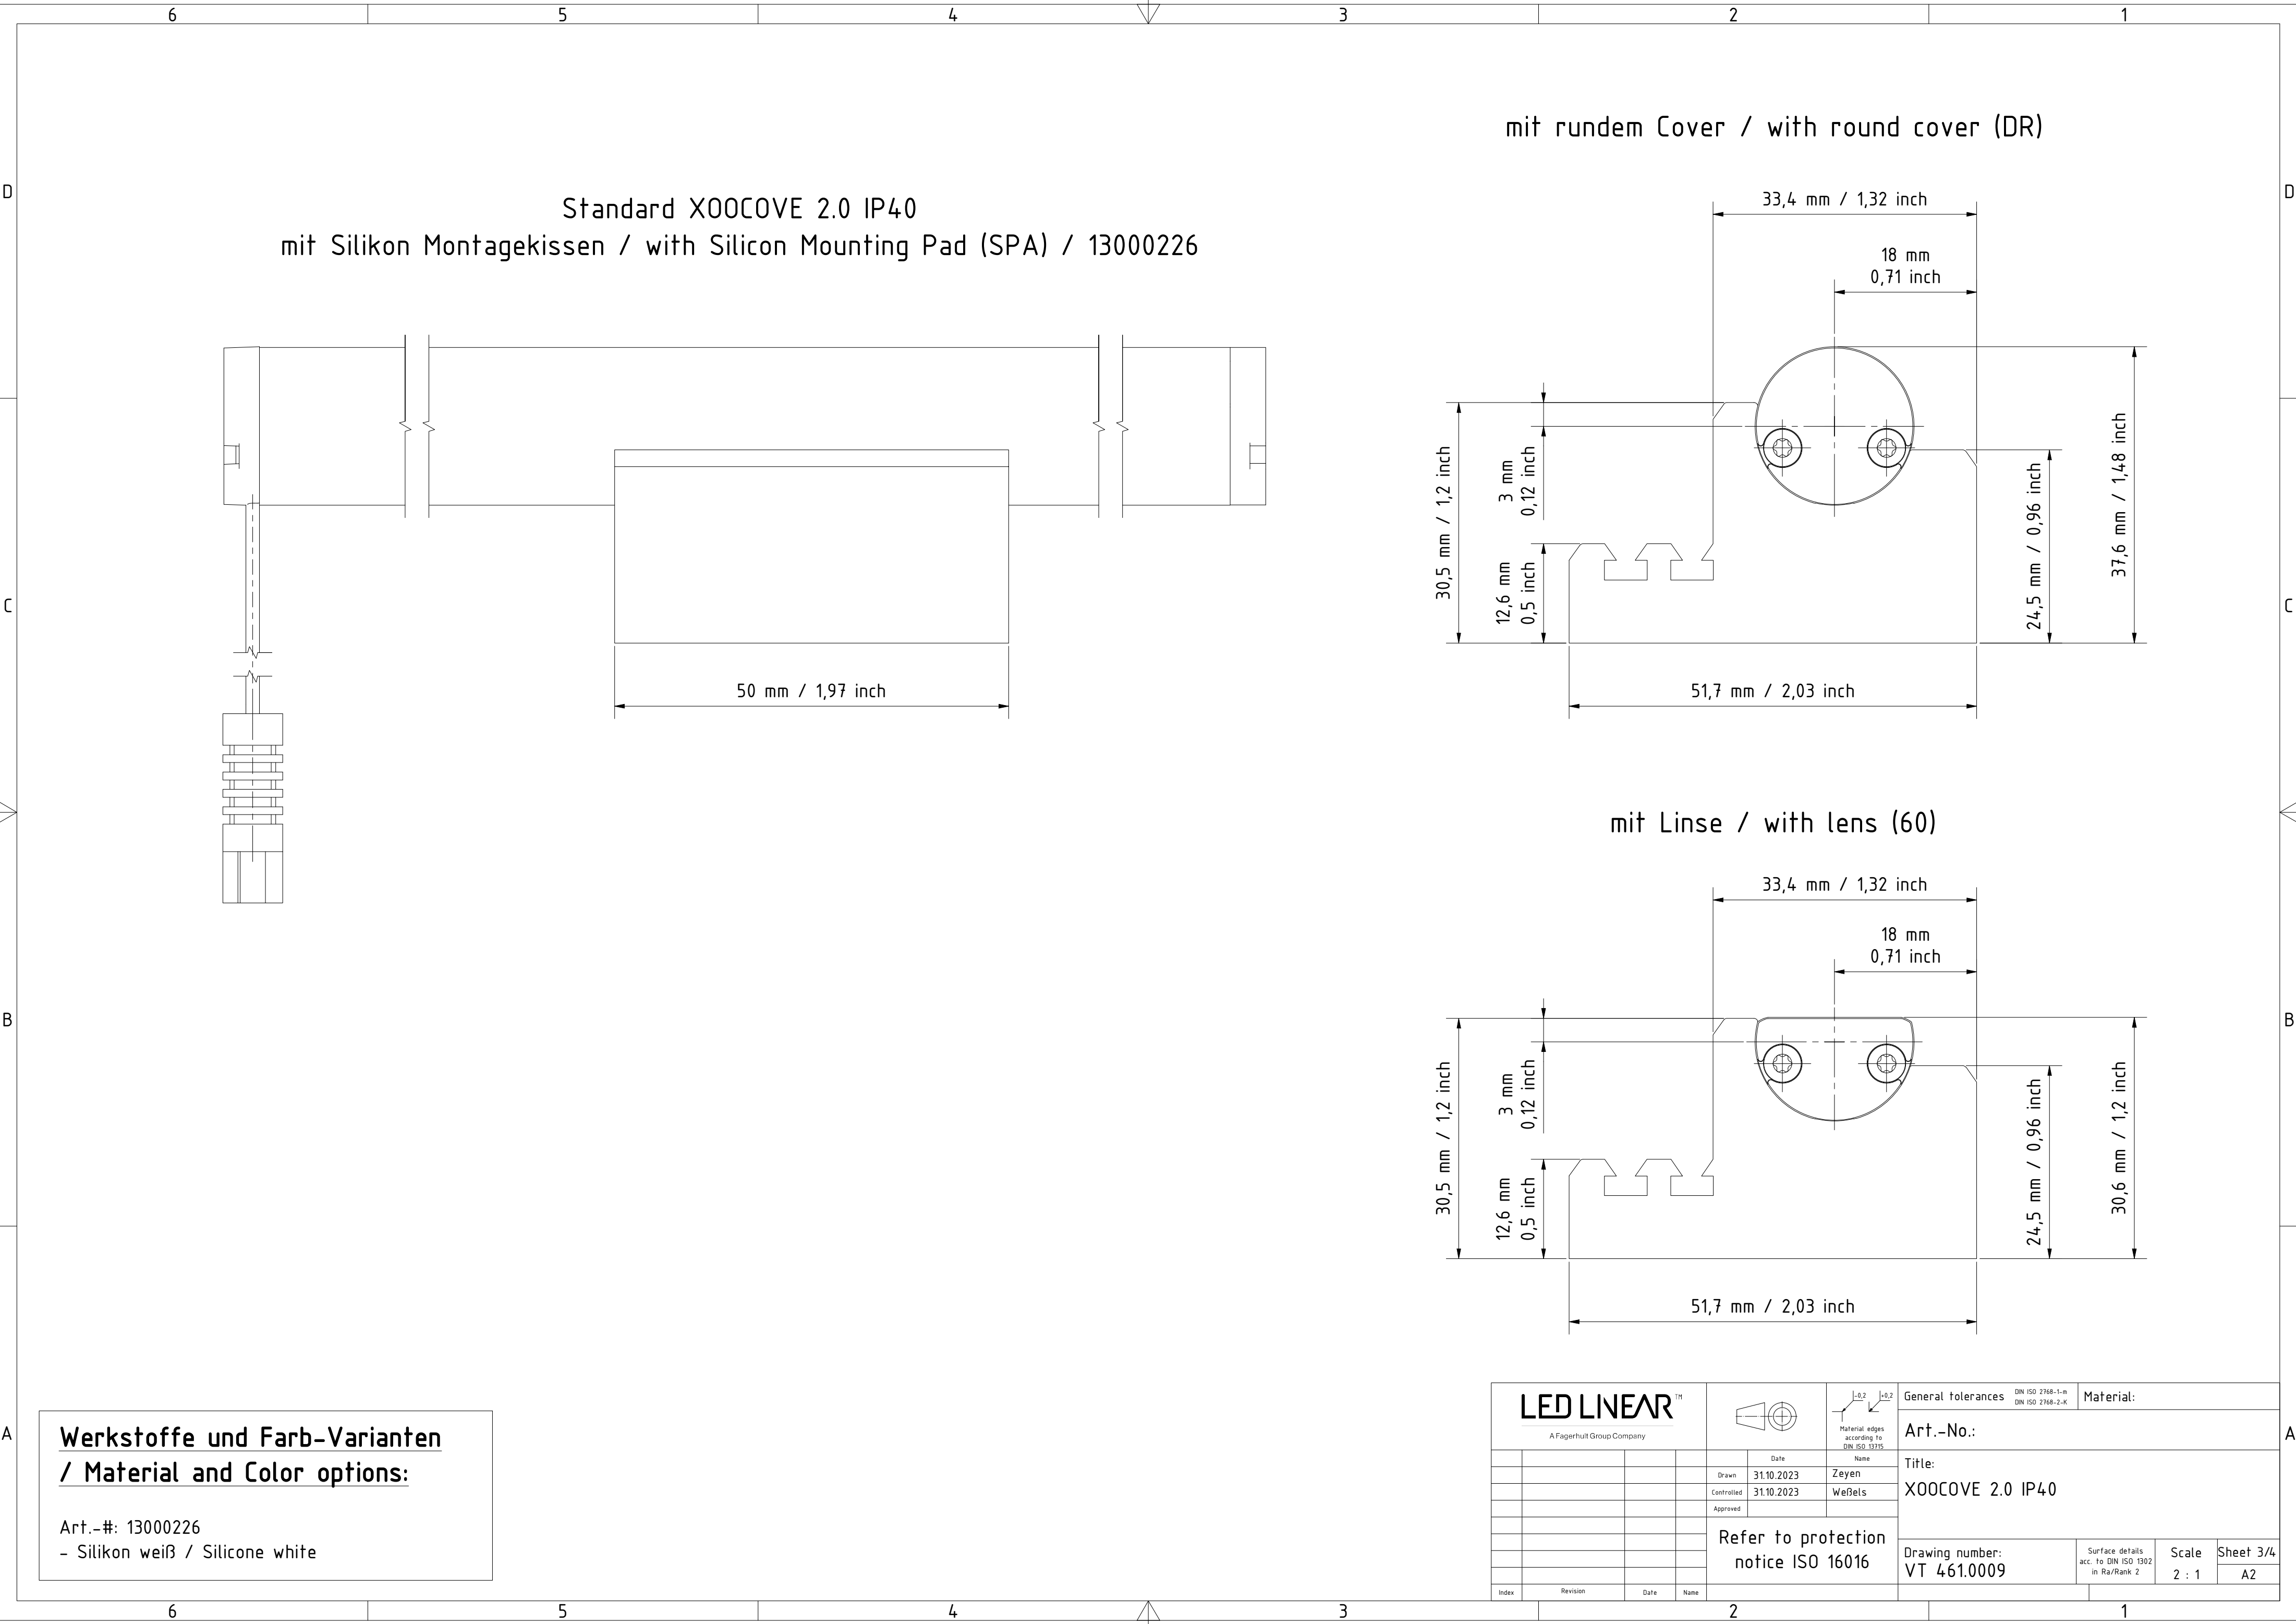


Standard X00COVE 2.0 IP40
mit Silikon Montagekissen / with Silicon Mounting Pad (SPA) / 13000226

mit rundem Cover / with round cover (DR)

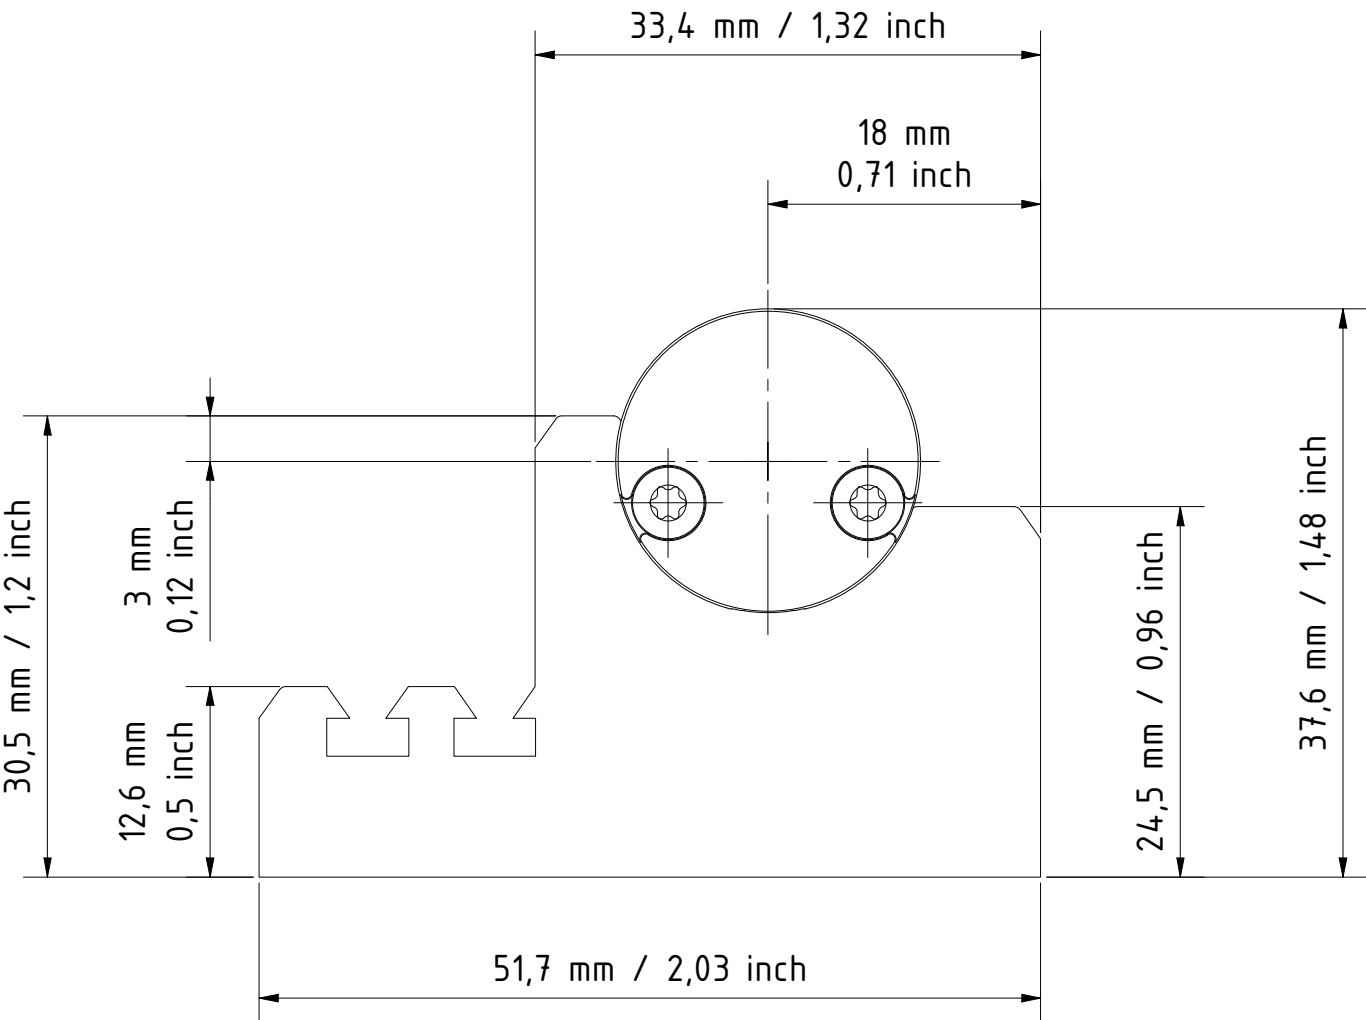



mit Linse / with lens (60)

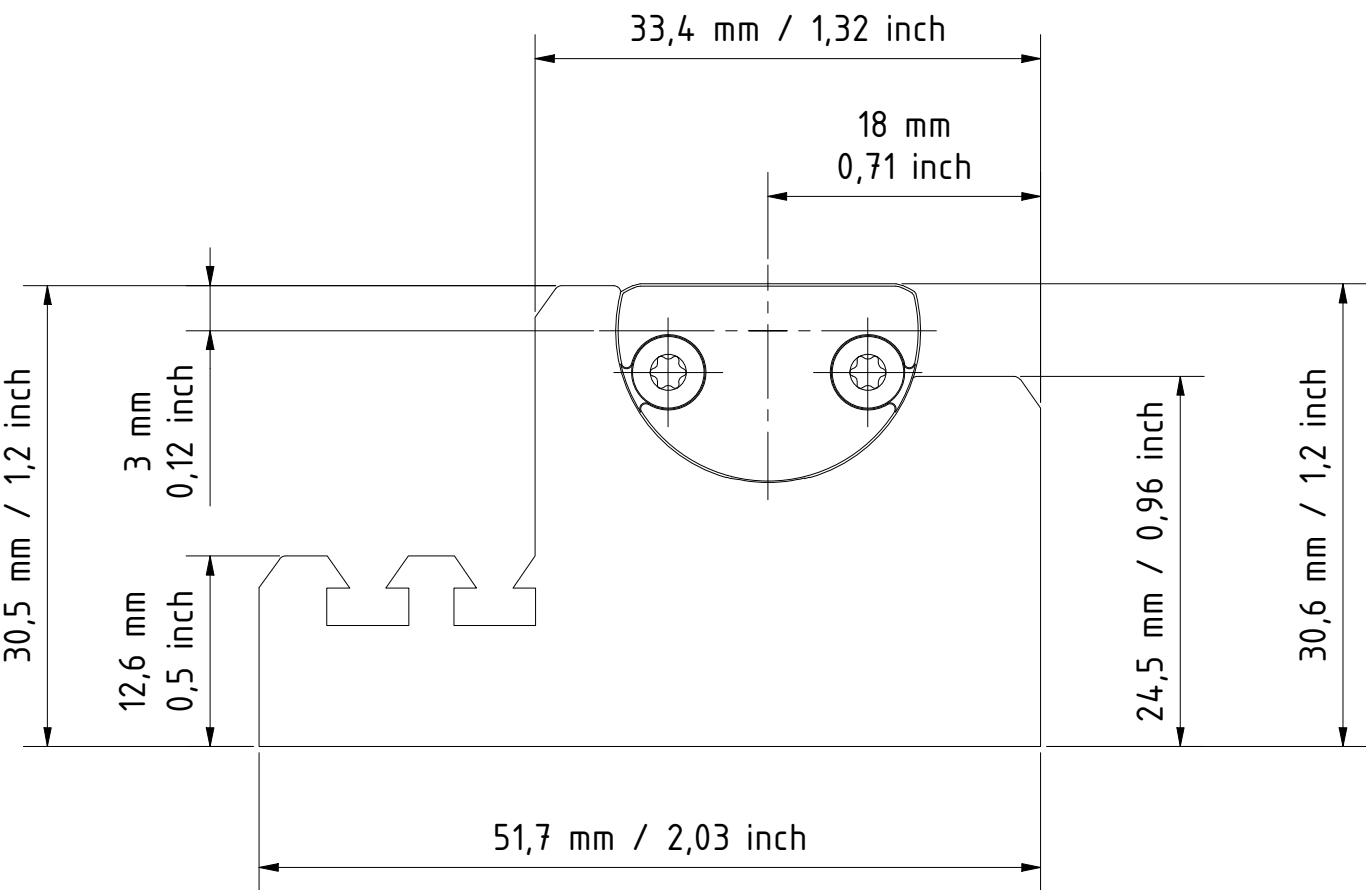



**Werkstoffe und Farb-Varianten
/ Material and Color options:**

Art.-#: 13000226
- Silikon weiß / Silicone white

LED LINEAR™ A Fagerhult Group Company						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
				Drawn	31.10.2023	Zeyen		Art.-No.:				
				Controlled	31.10.2023	Weßels		Title:				
				Approved				X00COVE 2.0 IP40				
				Refer to protection notice ISO 16016				Drawing number:		Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 2 : 1	Sheet 3/4 A2
								VT 461.0009				
Index	Revision	Date	Name									

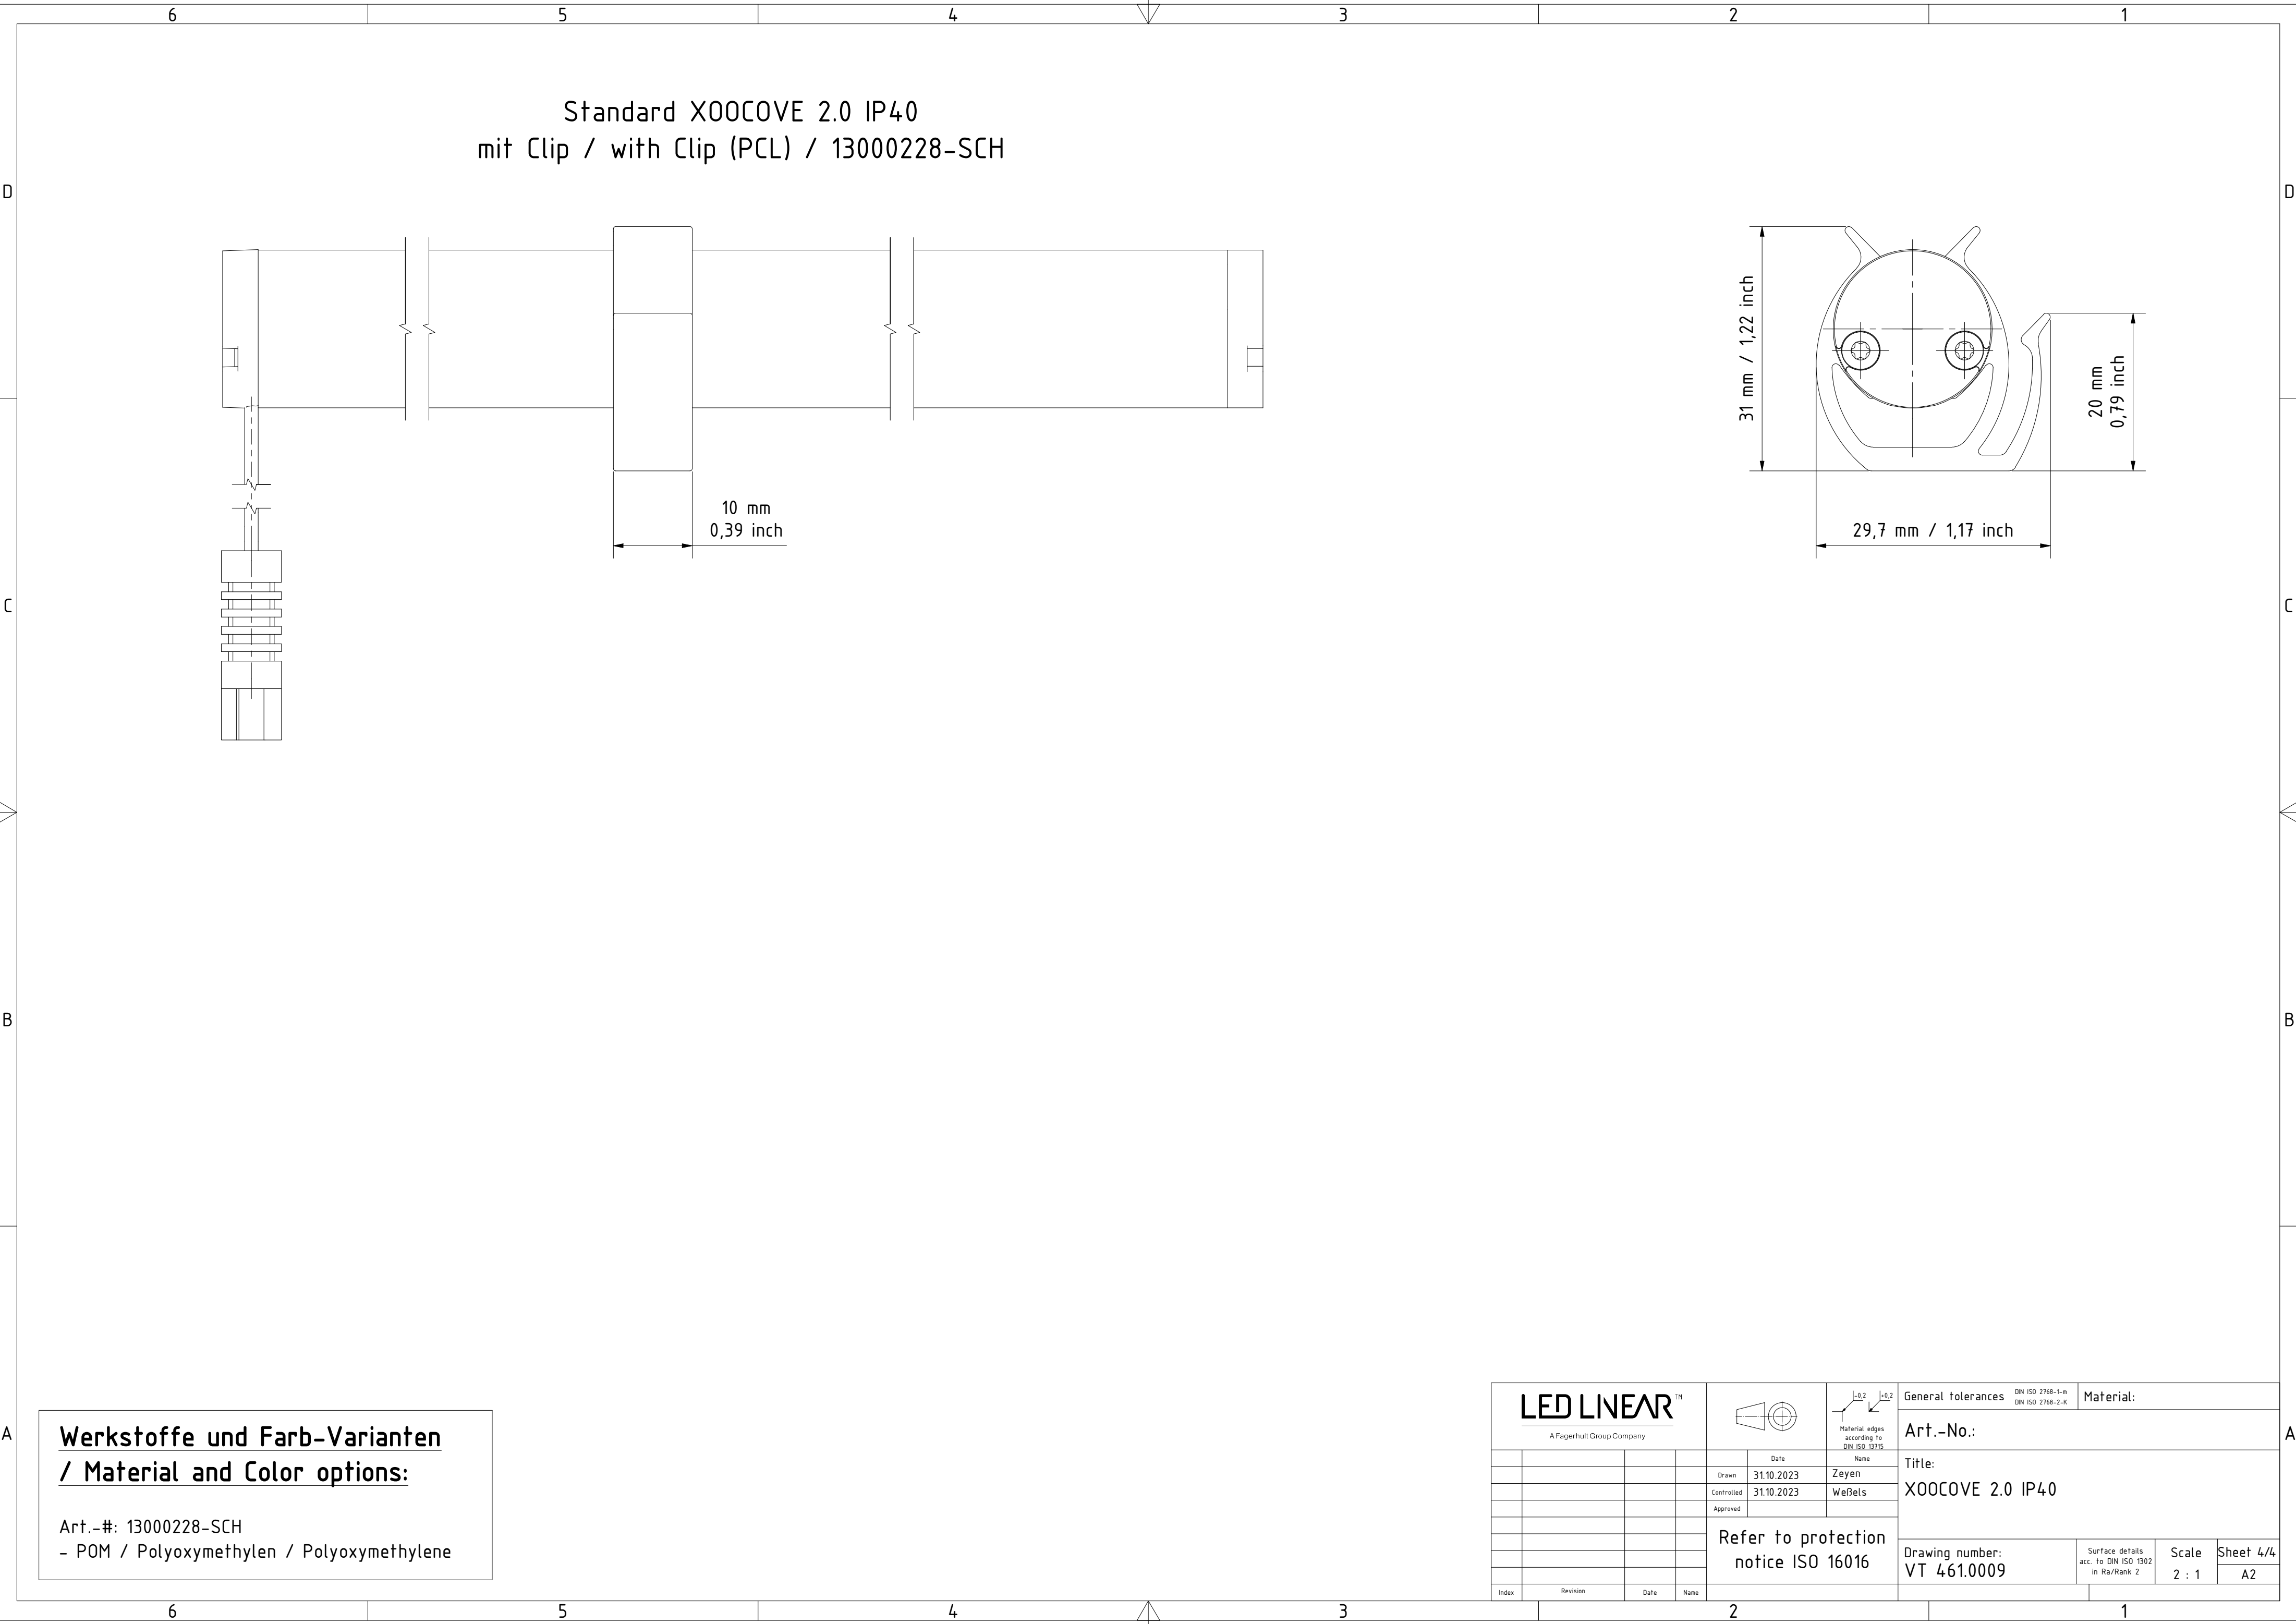

Standard X00COVE 2.0 IP40
mit Clip / with Clip (PCL) / 13000228-SCH

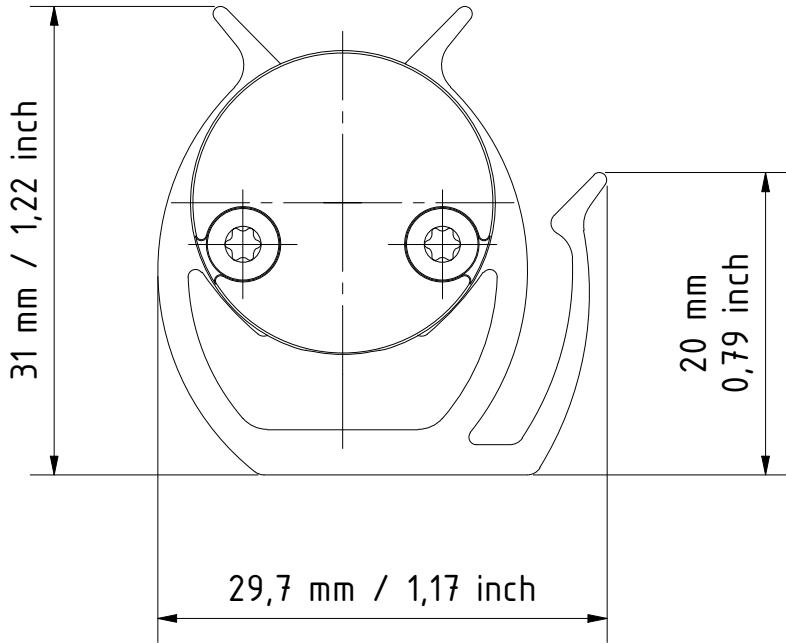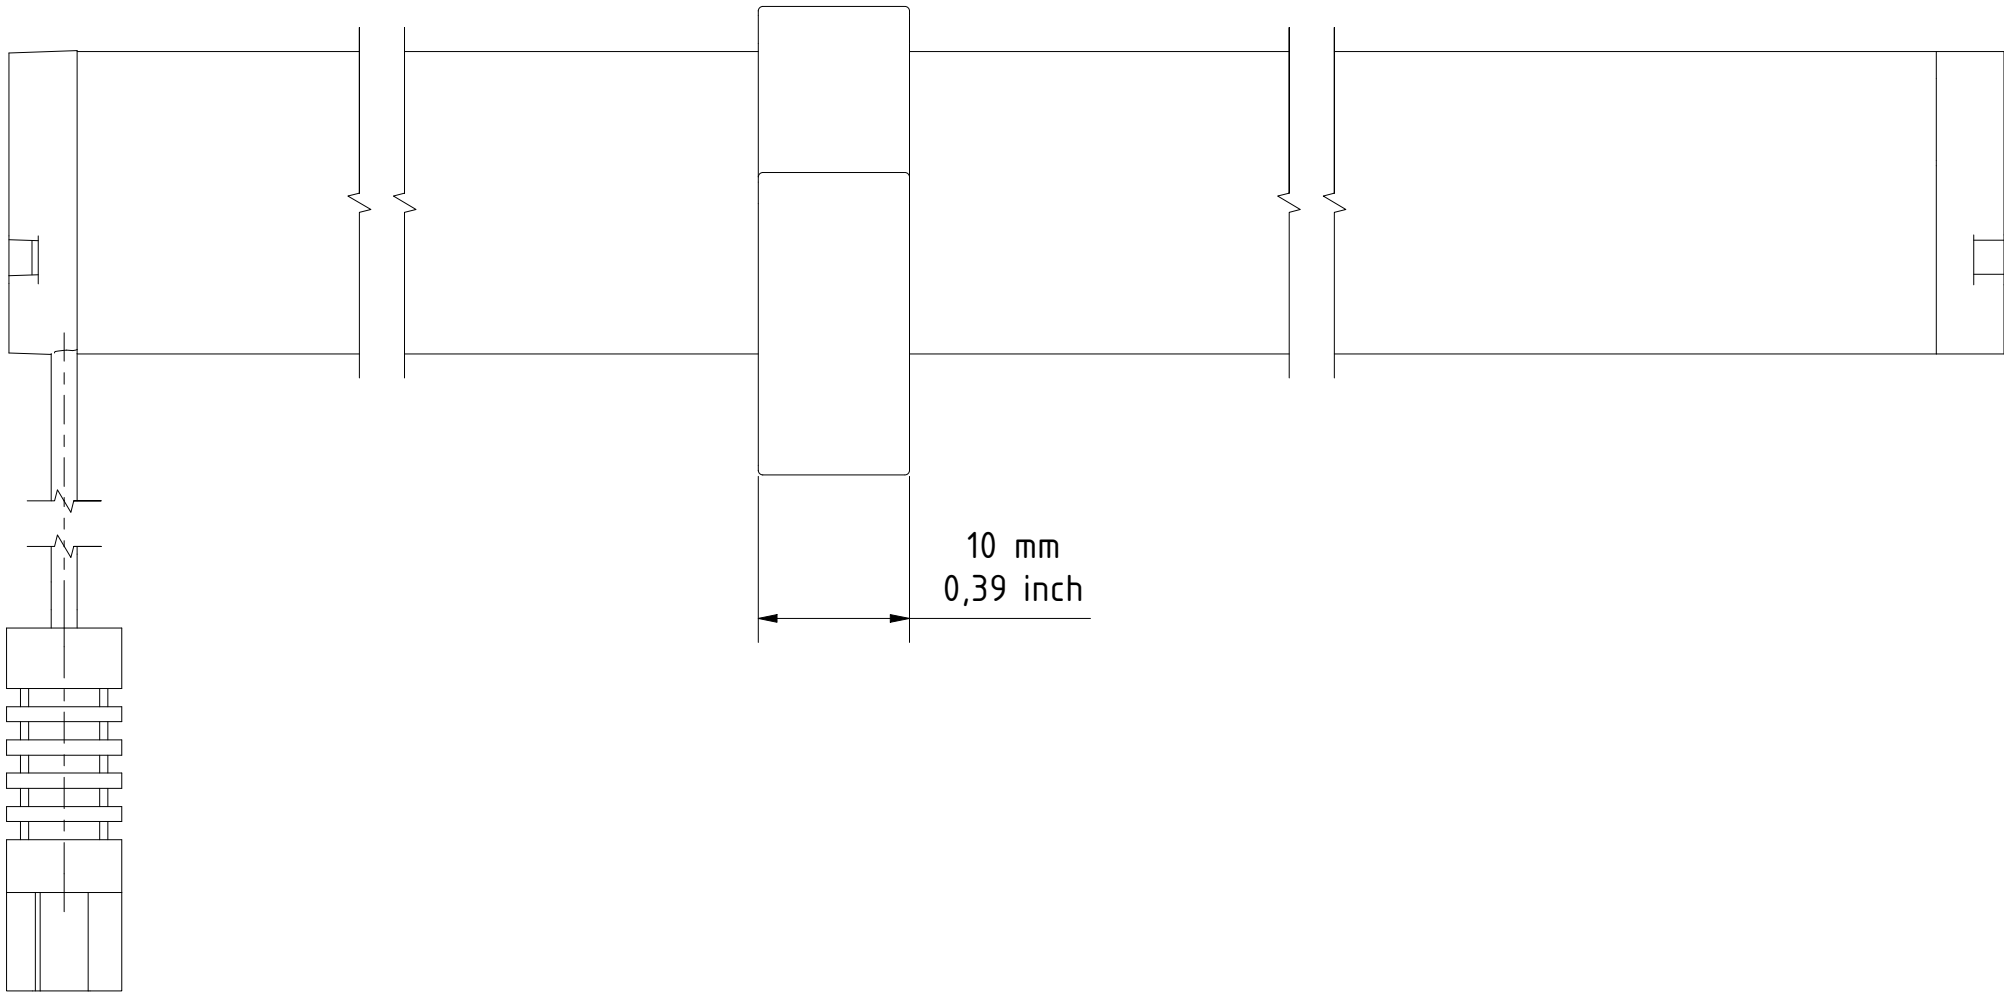

Werkstoffe und Farb-Varianten
/ Material and Color options:

Art.-#: 13000228-SCH
- POM / Polyoxymethylen / Polyoxymethylene

LED LINEAR TM A Fagerhult Group Company						General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:		
					Date	Name	Art.-No.: Title: X00COVE 2.0 IP40			
				Drawn	31.10.2023	Zeyen				
				Controlled	31.10.2023	Weßels				
				Approved			Drawing number: VT 461.0009			
				Refer to protection notice ISO 16016						
Index	Revision	Date	Name					Surface details acc. to DIN ISO 1302 in Ra/Rank 2	Scale 2 : 1	Sheet 4/4 A2