


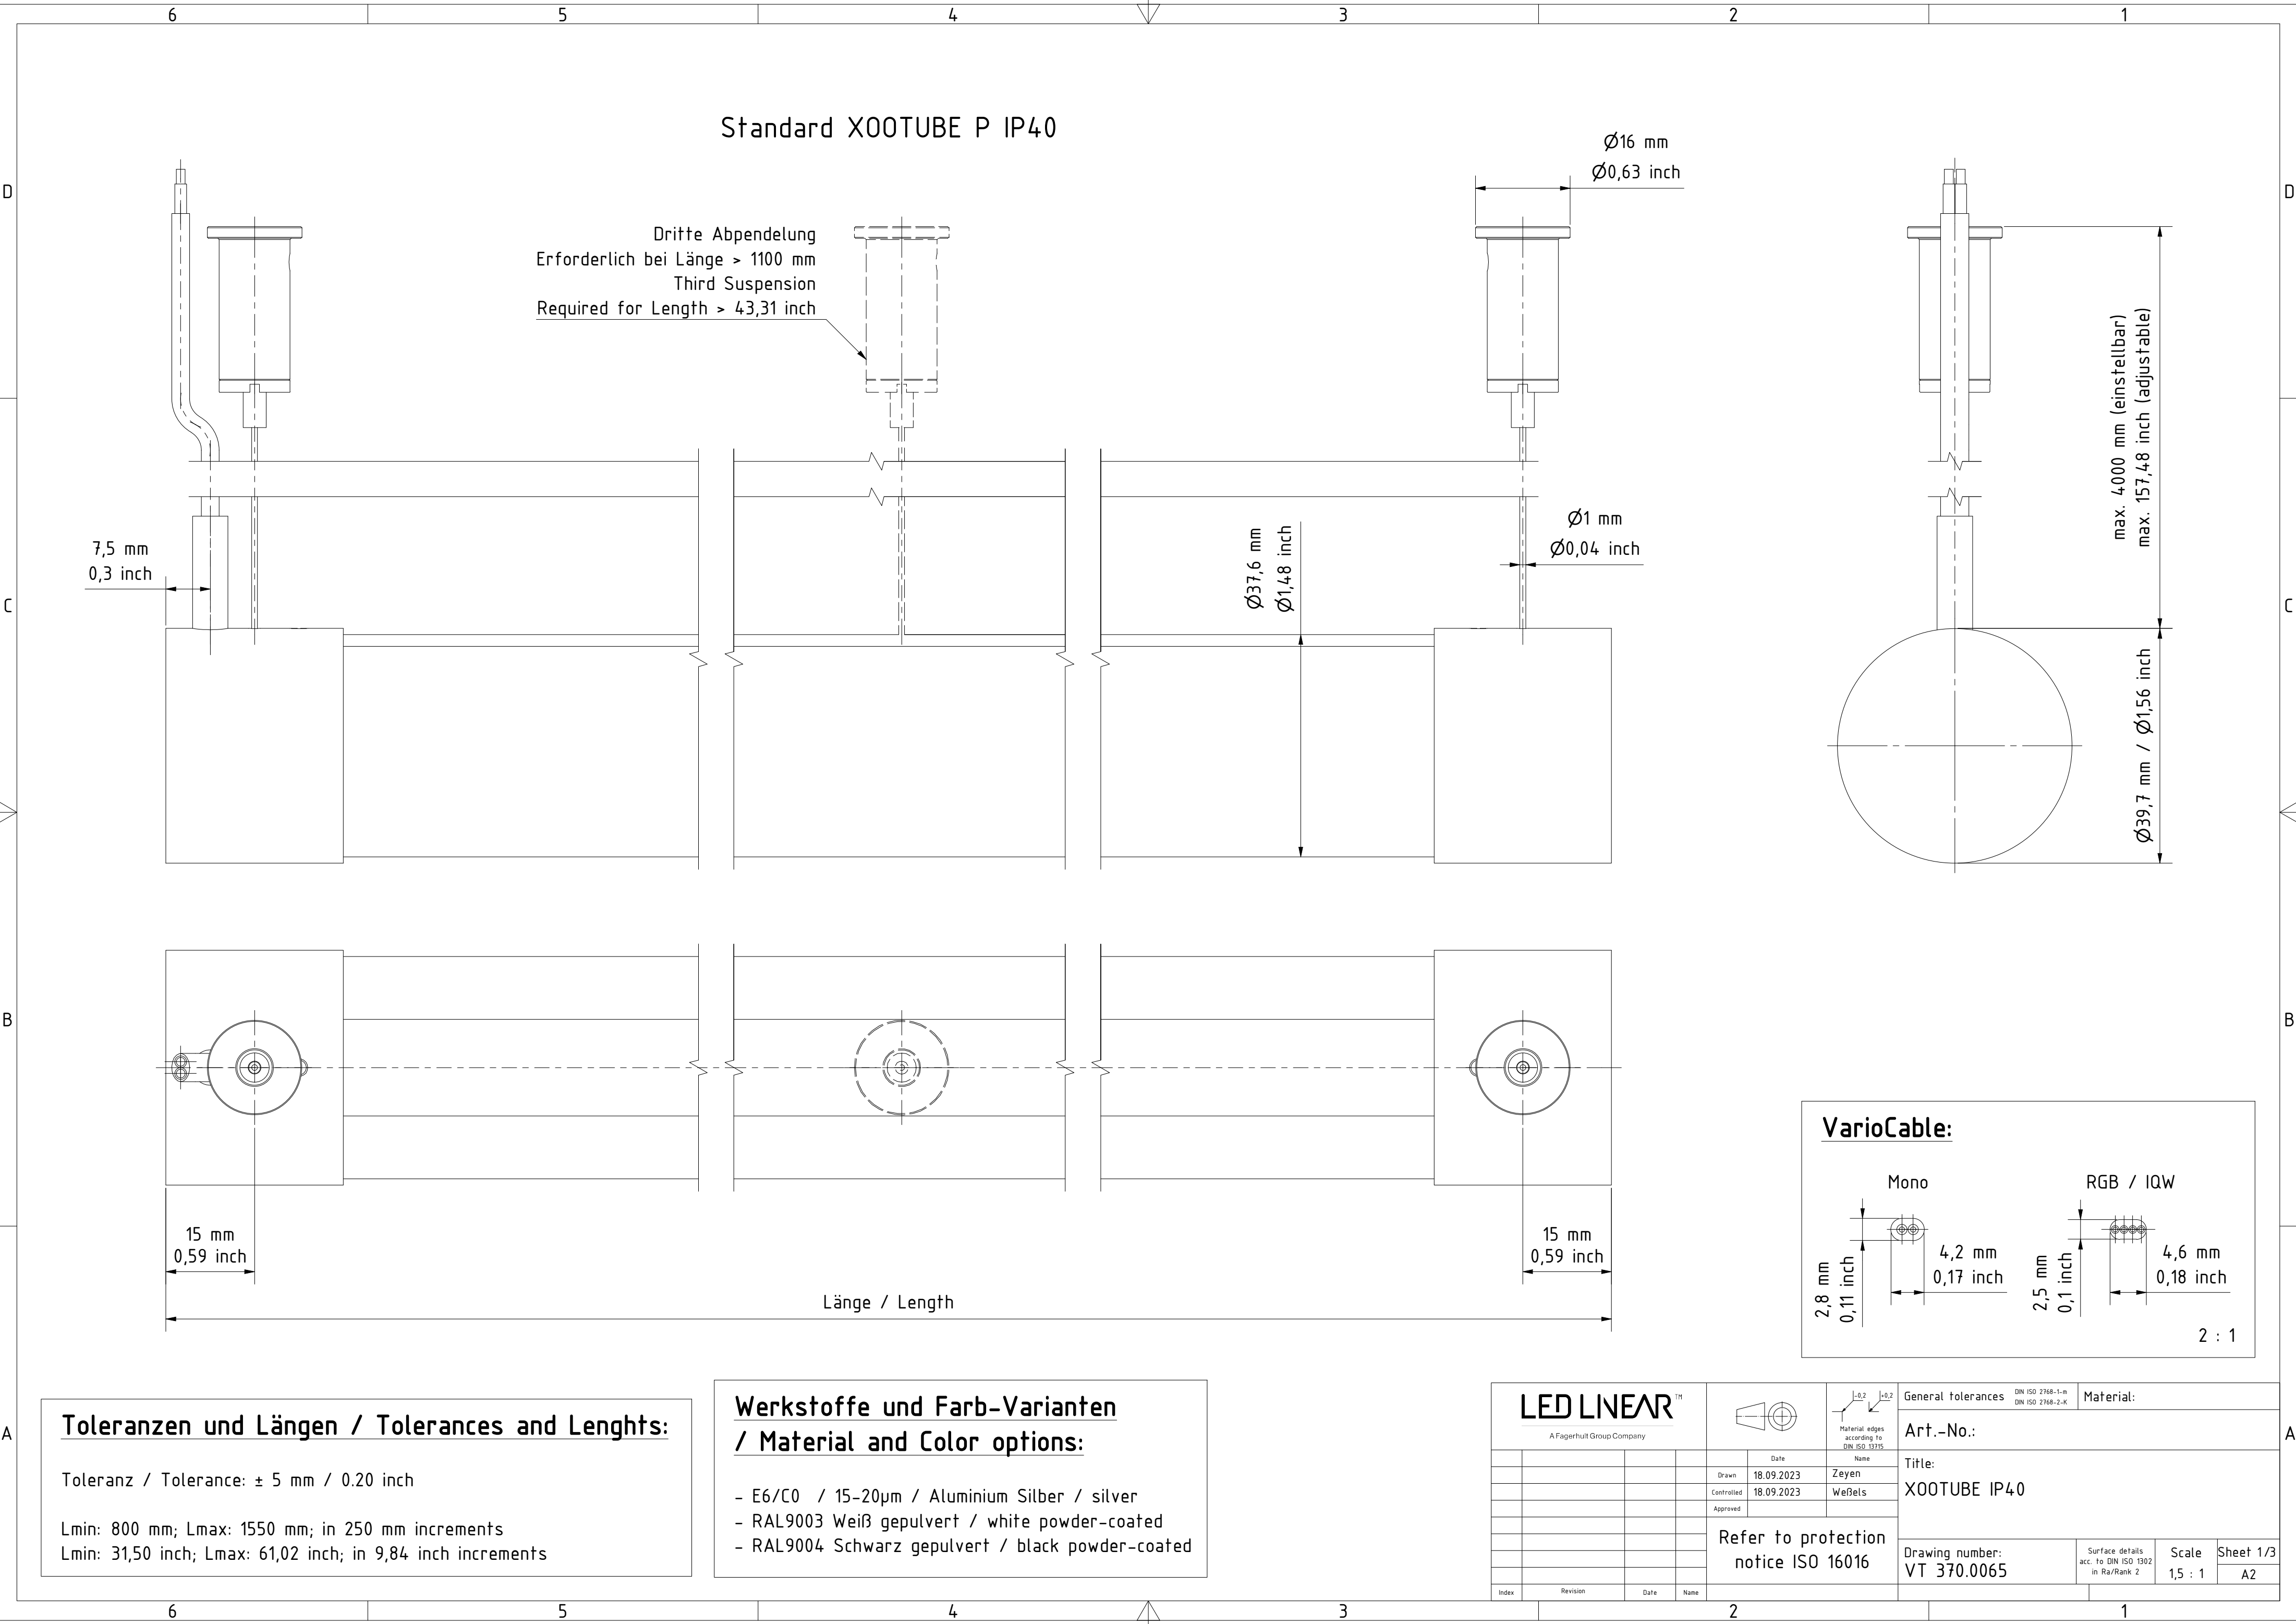

Toleranzen und Längen / Tolerances and Lengths:

Toleranz / Tolerance: ± 5 mm / 0.20 inch



Lmin: 800 mm; Lmax: 1550 mm; in 250 mm increments

Lmin: 31,50 inch; Lmax: 61,02 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- RAL9003 Weiß gepulvert / white powder-coated
- RAL9004 Schwarz gepulvert / black powder-coated

LED LINEARTM
A Fagerhult Group Company



General tolerances DIN ISO 2768-1-m
DIN ISO 2768-2-K

Material:

Art.-No.:

Title:

XOOTUBE IP40


Drawing number:
VT 370.0065


Surface details
acc. to DIN ISO 1302
in Ra/Rank 2

Scale
1,5 : 1

Sheet 1/3
A2

VarioCable:

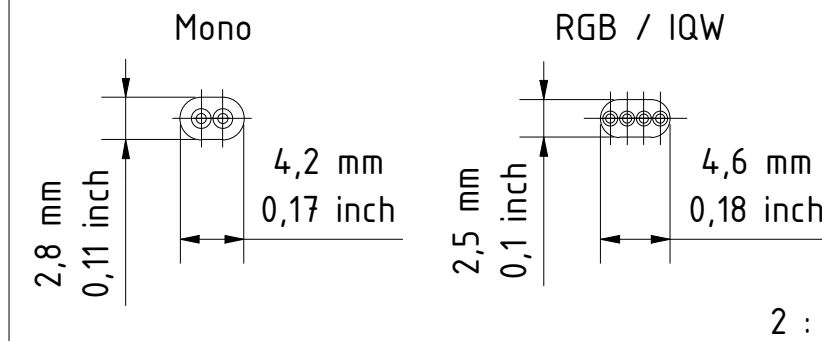

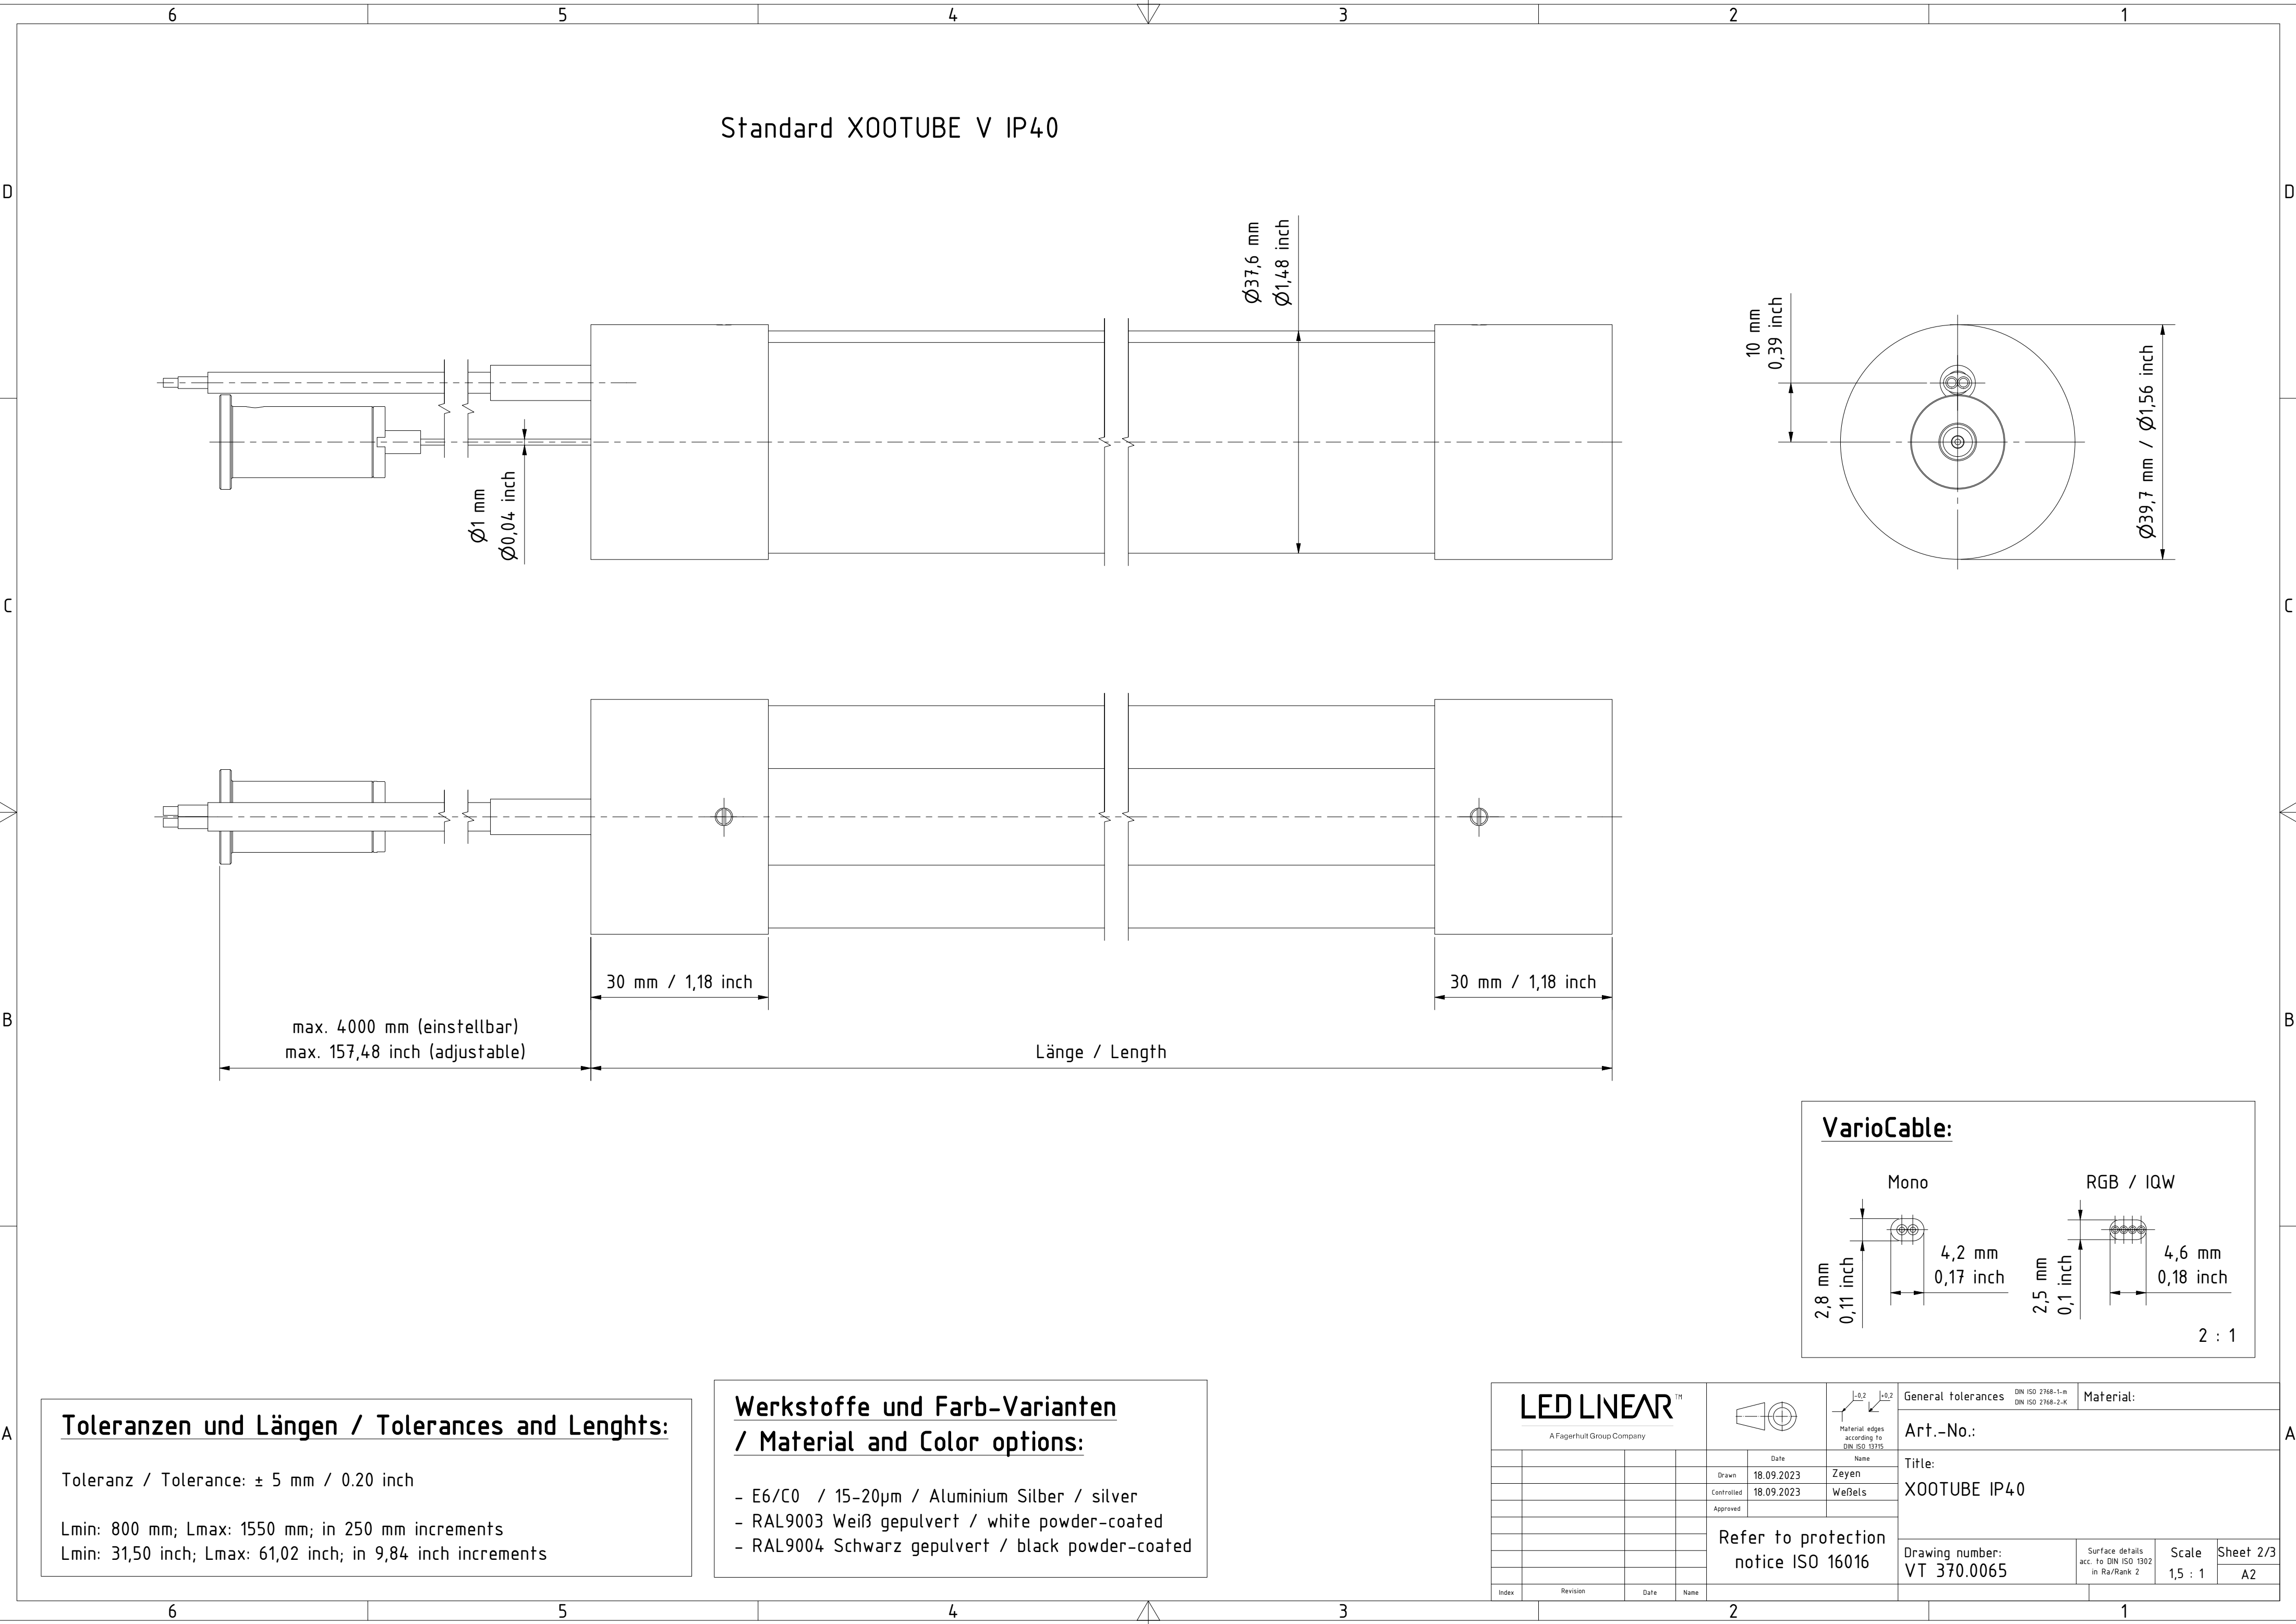


Toleranzen und Längen / Tolerances and Lenghts:


Toleranz / Tolerance: $\pm 5 \text{ mm}$ / 0.20 inch

Lmin: 800 mm; Lmax: 1550 mm; in 250 mm increments
Lmin: 31,50 inch; Lmax: 61,02 inch; in 9,84 inch increments

**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20 μm / Aluminium Silber / silver
- RAL9003 Weiß gepulvert / white powder-coated
- RAL9004 Schwarz gepulvert / black powder-coated

LED LINEAR TM A Fagerhult Group Company						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:	
				Drawn	18.09.2023	Zeyen		Art.-No.:			
				Controlled	18.09.2023	Weßels		Title:			
				Approved				XOOTUBE IP40			
								Drawing number: VT 370.0065			
				Refer to protection notice ISO 16016				Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1,5 : 1	Sheet 2/3 A2
Index	Revision	Date	Name								

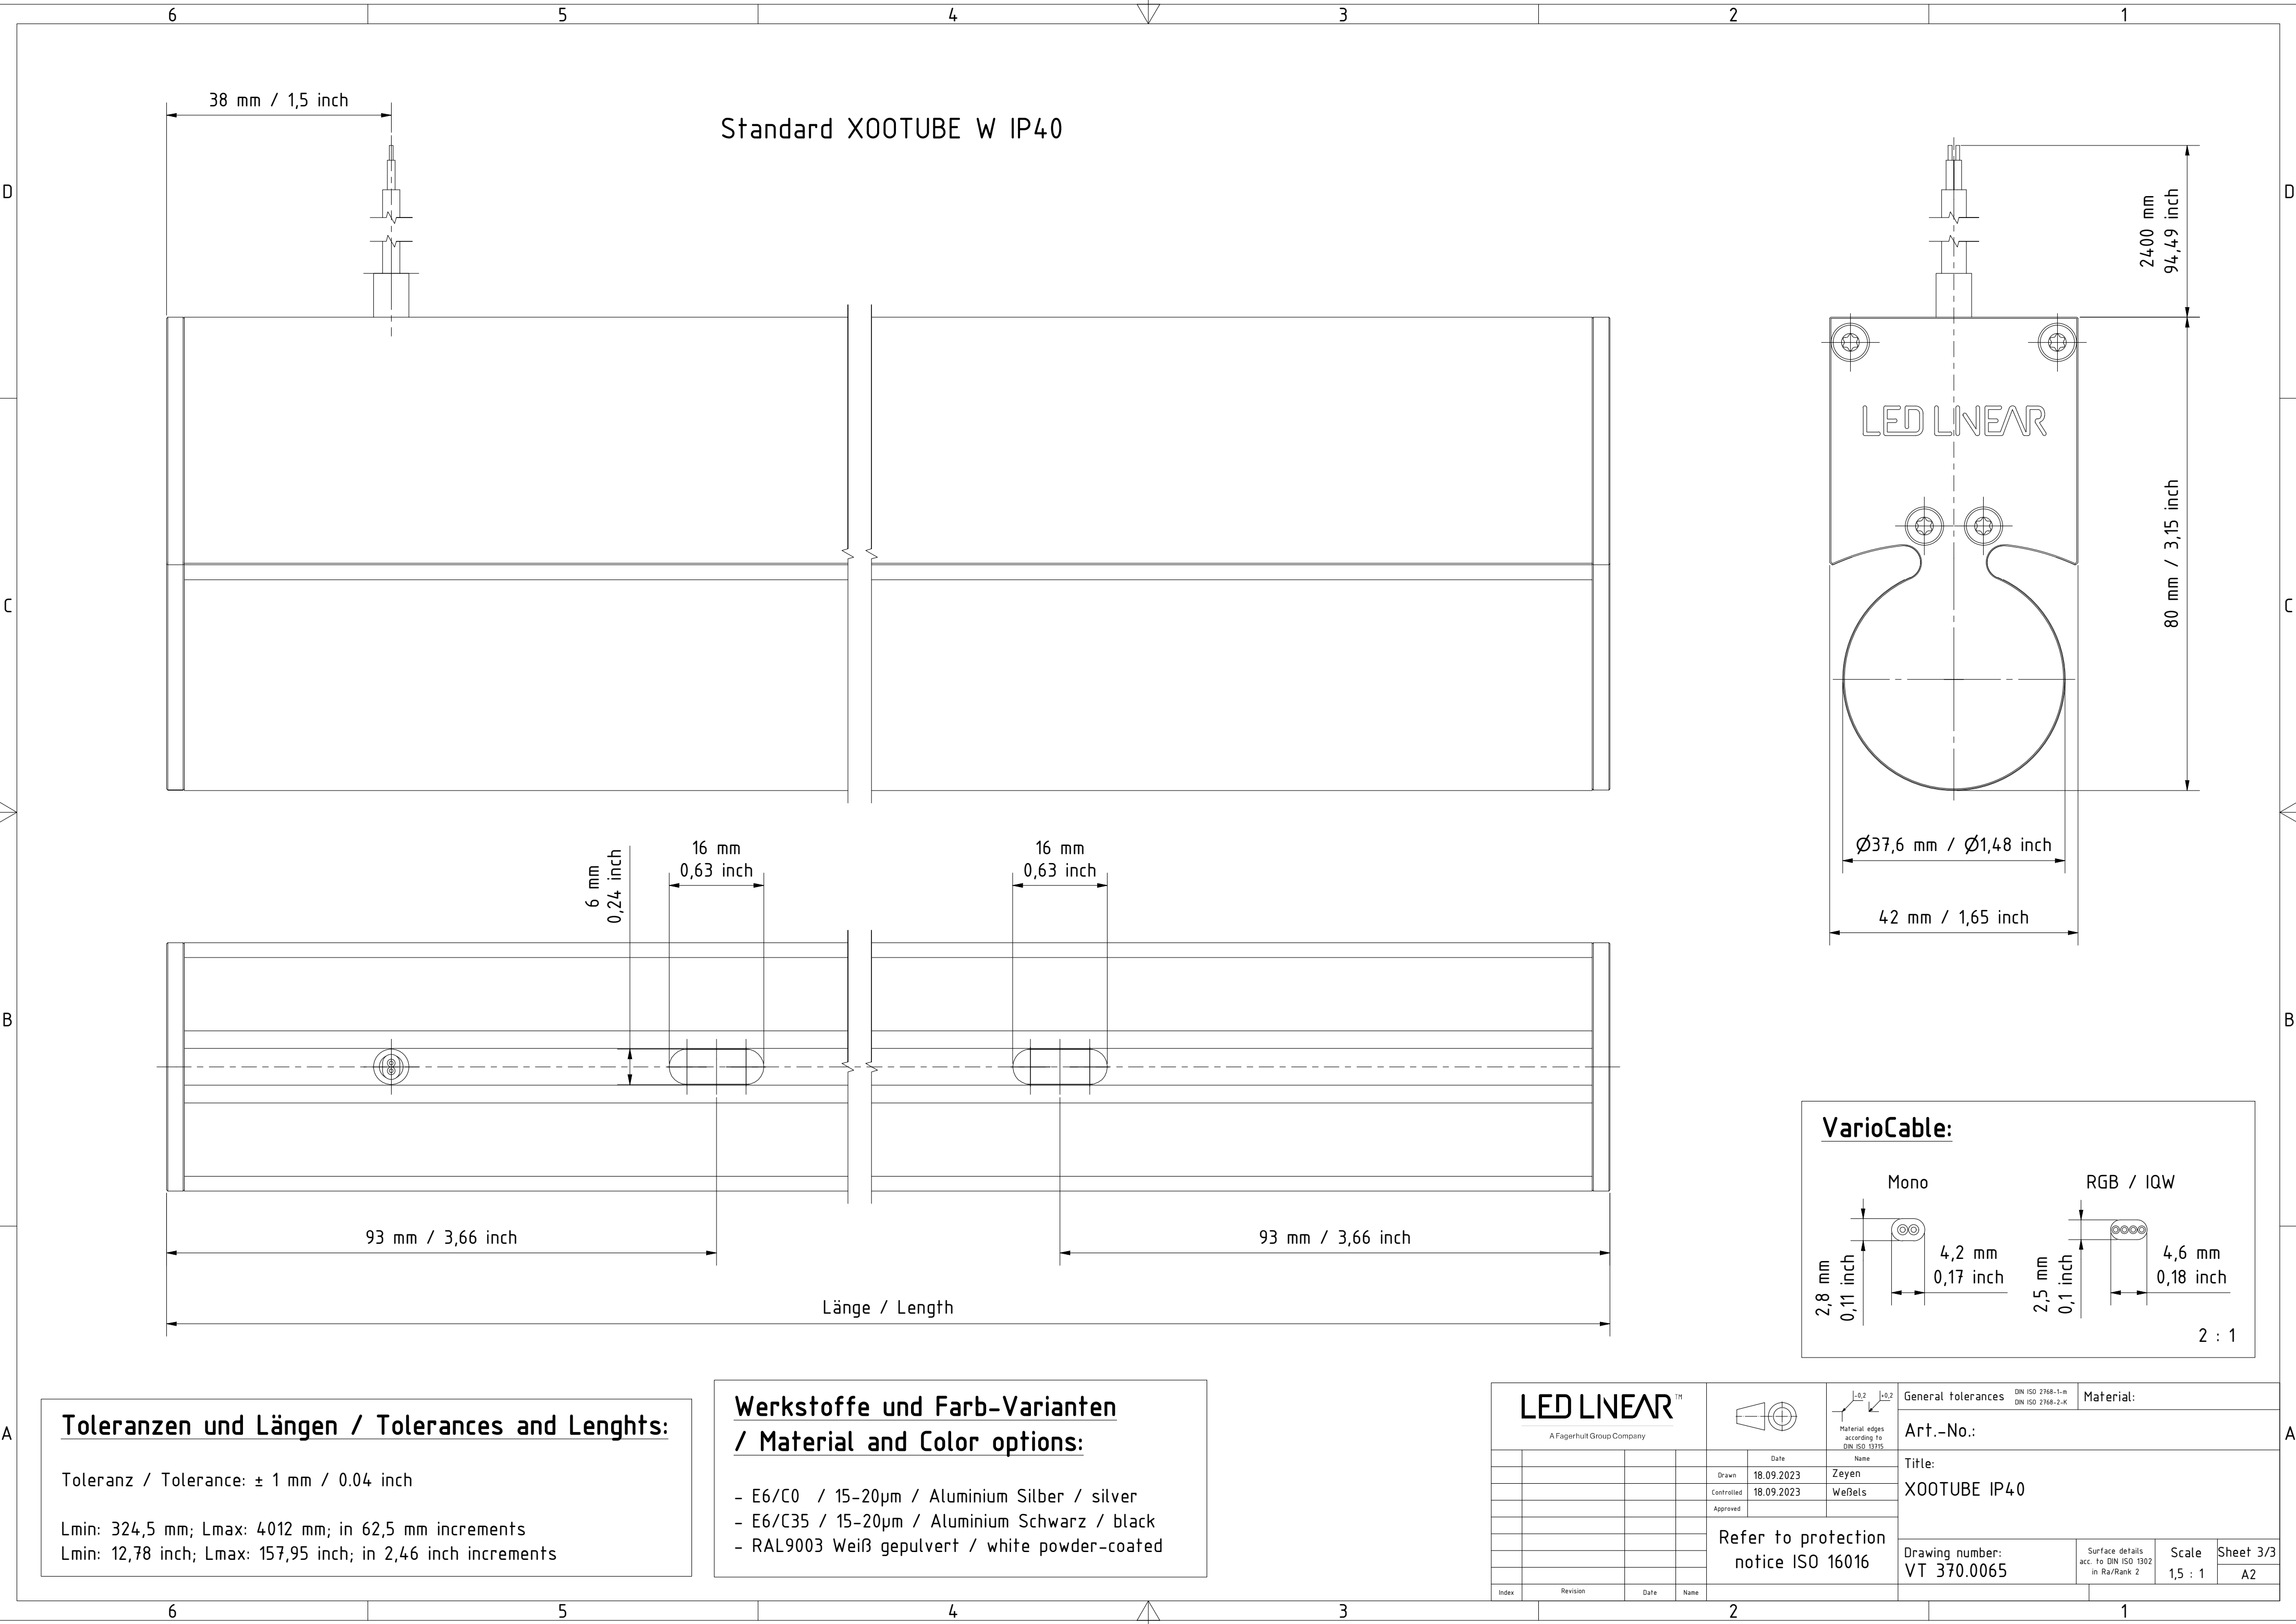

Toleranzen und Längen / Tolerances and Lenghts:


Toleranz / Tolerance: ± 1 mm / 0.04 inch

Lmin: 324,5 mm; Lmax: 4012 mm; in 62,5 mm increments
Lmin: 12,78 inch; Lmax: 157,95 inch; in 2,46 inch increments


**Werkstoffe und Farb-Varianten
/ Material and Color options:**

- E6/C0 / 15-20µm / Aluminium Silber / silver
- E6/C35 / 15-20µm / Aluminium Schwarz / black
- RAL9003 Weiß gepulvert / white powder-coated

VarioCable:

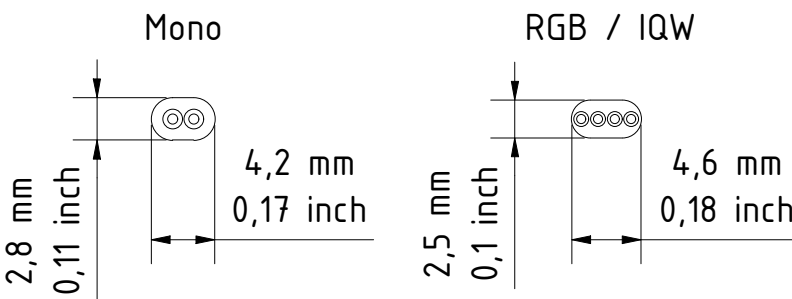

2 : 1

LED LINEAR™ A Fagerhult Group Company						 Material edges according to DIN ISO 13715		General tolerances DIN ISO 2768-1-m DIN ISO 2768-2-K		Material:					
					Date		Name	Art.-No.:							
				Drawn	18.09.2023		Zeyen	Title:							
				Controlled	18.09.2023		Weßels	XOOTUBE IP40							
				Approved				Drawing number: VT 370.0065							
				Refer to protection notice ISO 16016								Surface details acc. to DIN ISO 1302 in Ra/Rank 2		Scale 1,5 : 1	Sheet 3/3 A2
Index	Revision	Date	Name												